



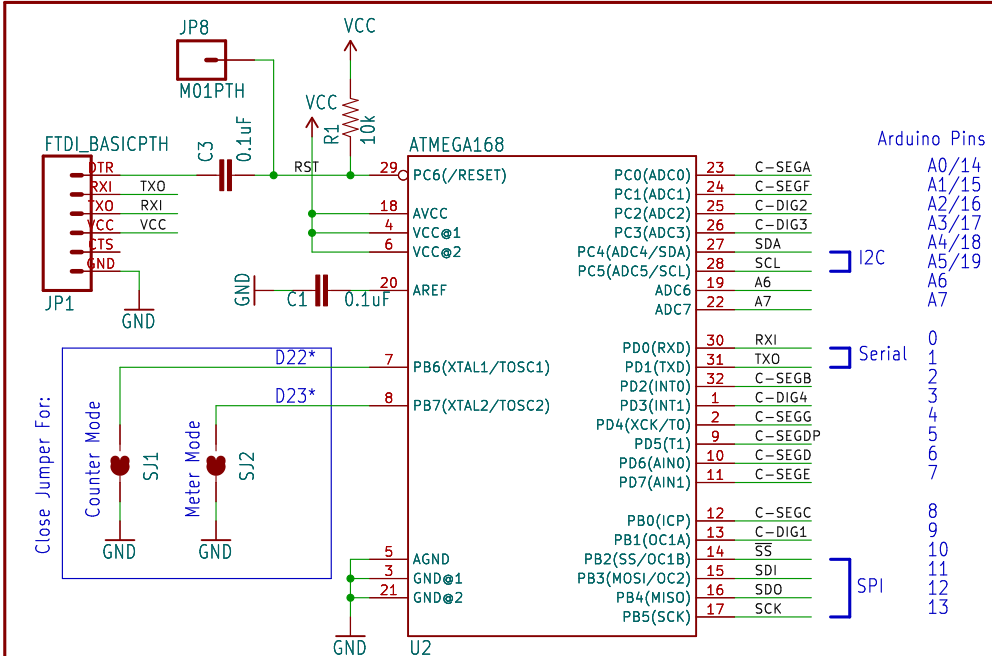


Arduino

v1.0
4 / 0.08 = 500hm
5 - 1 = 4V
80mA Max @ 25% Duty cycle
12 for Display
2 for Serial
2 for I2C
4 for SPI
2 for I2C Address
1 for counter
Changes on v1.1:
Fixed 7-seg footprint
Add reset breakout
Fixed silk
Swapped NPN/PNPs

Changes on v1.2:
5 - 2.1(Yellow Vf) - 0.6(NPN+PNP Vs) = 2.3V
2.3V = R * 0.06A (60mA peak)
R = 38.3 Ohm
Measurements show 10mA. Changing to 27 Ohm
Removed I2C adr jumpers
Added mode jumpers
Added A6/A7 inputs
Changed SPI pins to SDO/SDI to match original S75
Add OSHW logo
Changes on v1.3:
Silkscreen squares for colors
Move in 10uF cap
Add silk to top side A6/7
Ganged I2C + pwr

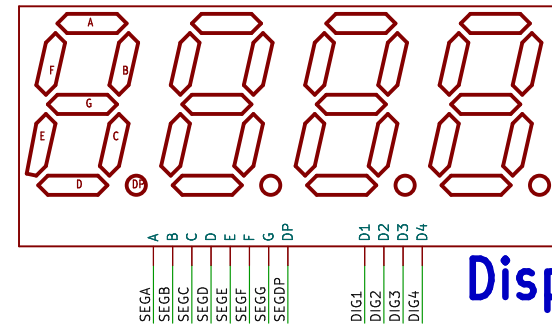


Display

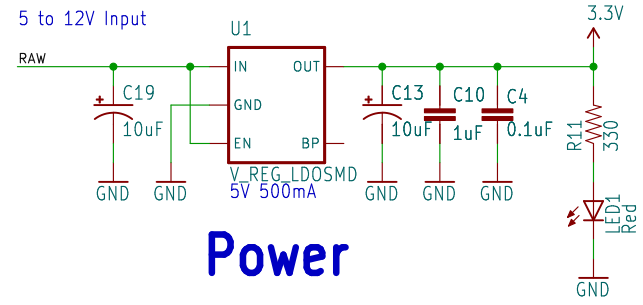

Power

Measurements:

Red/Yel 5V	Blu/Wht 5V	Measurements: 5.0V
500hm 4.68V 52.4mA(4 segs) 2.08V	500hm 4.78V 29.5mA(4 segs) 3.31V	50 Ohm 4.2V 10mA 4.0V 3.92V
0.55V	0.8V	1.59V
0V	0V	0V
Min/Max 49(52.4mA)/74(35mA) Red/Yellow/Green: 68	Min/Max 28(52mA)/42(35mA) Blue/White: 33 or 49	

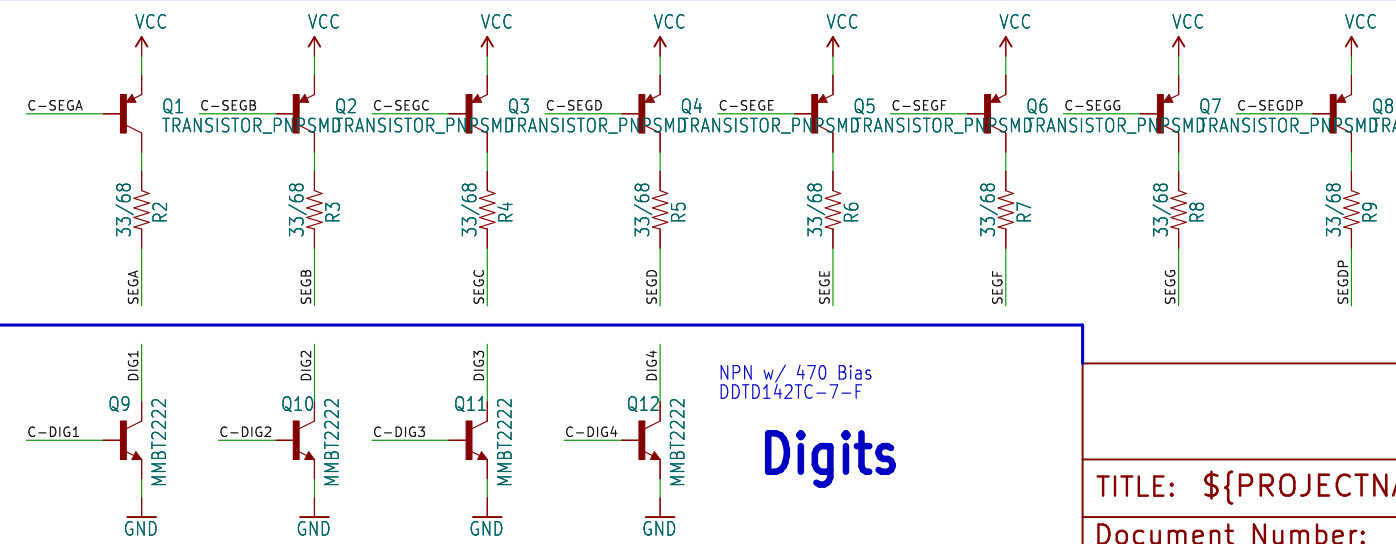


Segments

Digits



open hardware

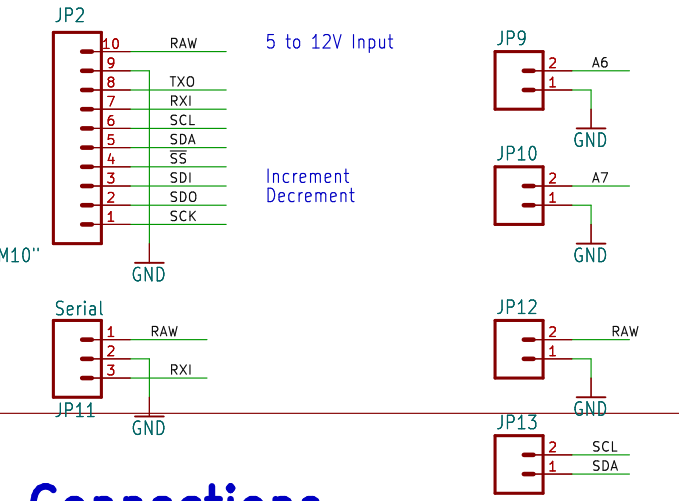

Connections

Released under the Creative Commons Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0>
Design by: N. Seidle

TITLE: \${PROJECTNAME}		SFE	SFE
Document Number:		REV:	
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}	