




Voltage Regulator and Battery Charger

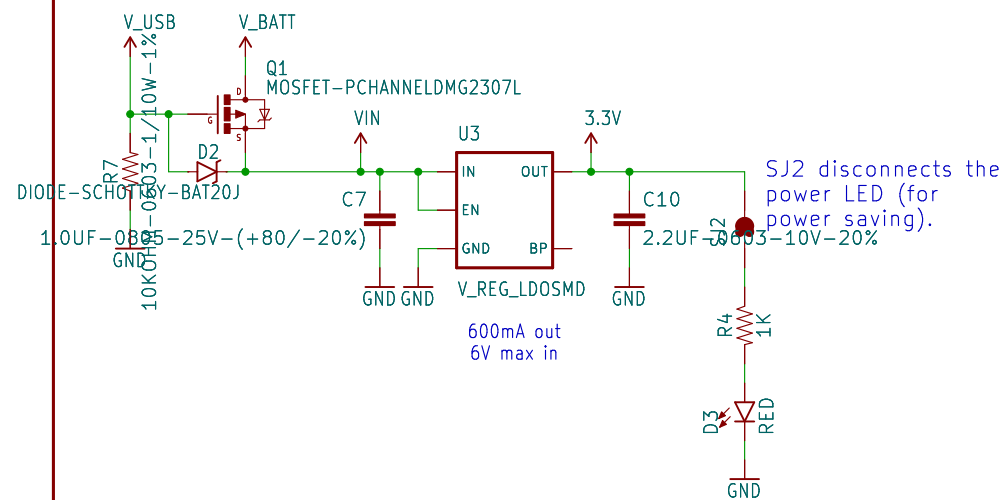


Lithium-Polymer Battery Charger (1-cell)

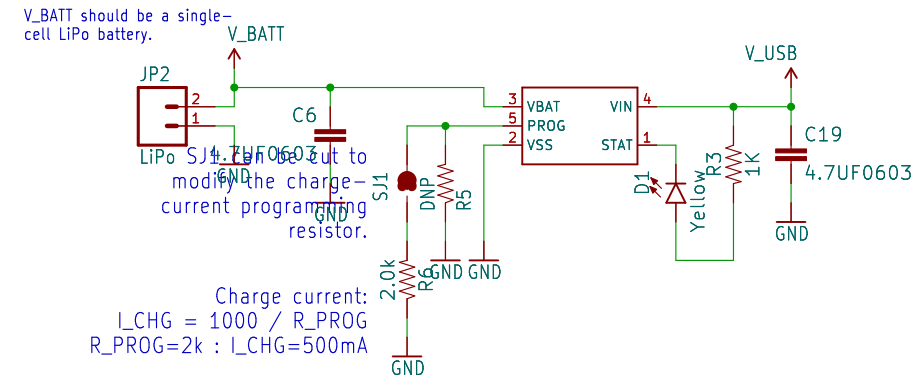


FT231XS (USB-to-Serial Converter)

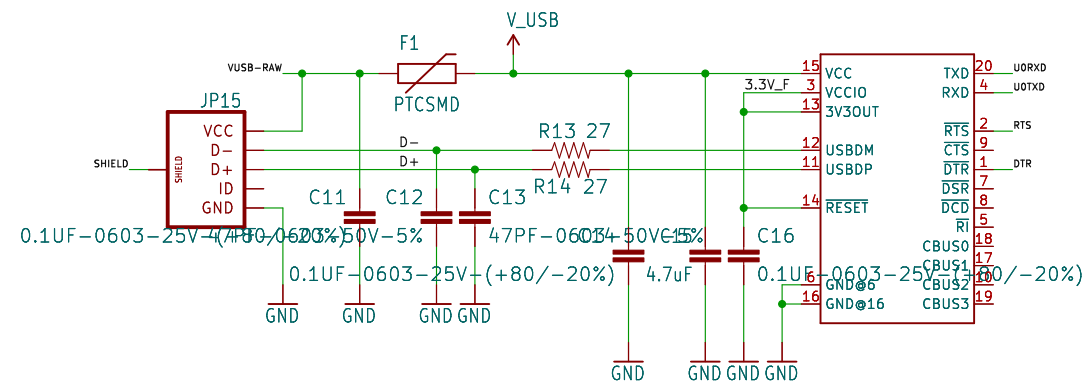

Espressif ESP32

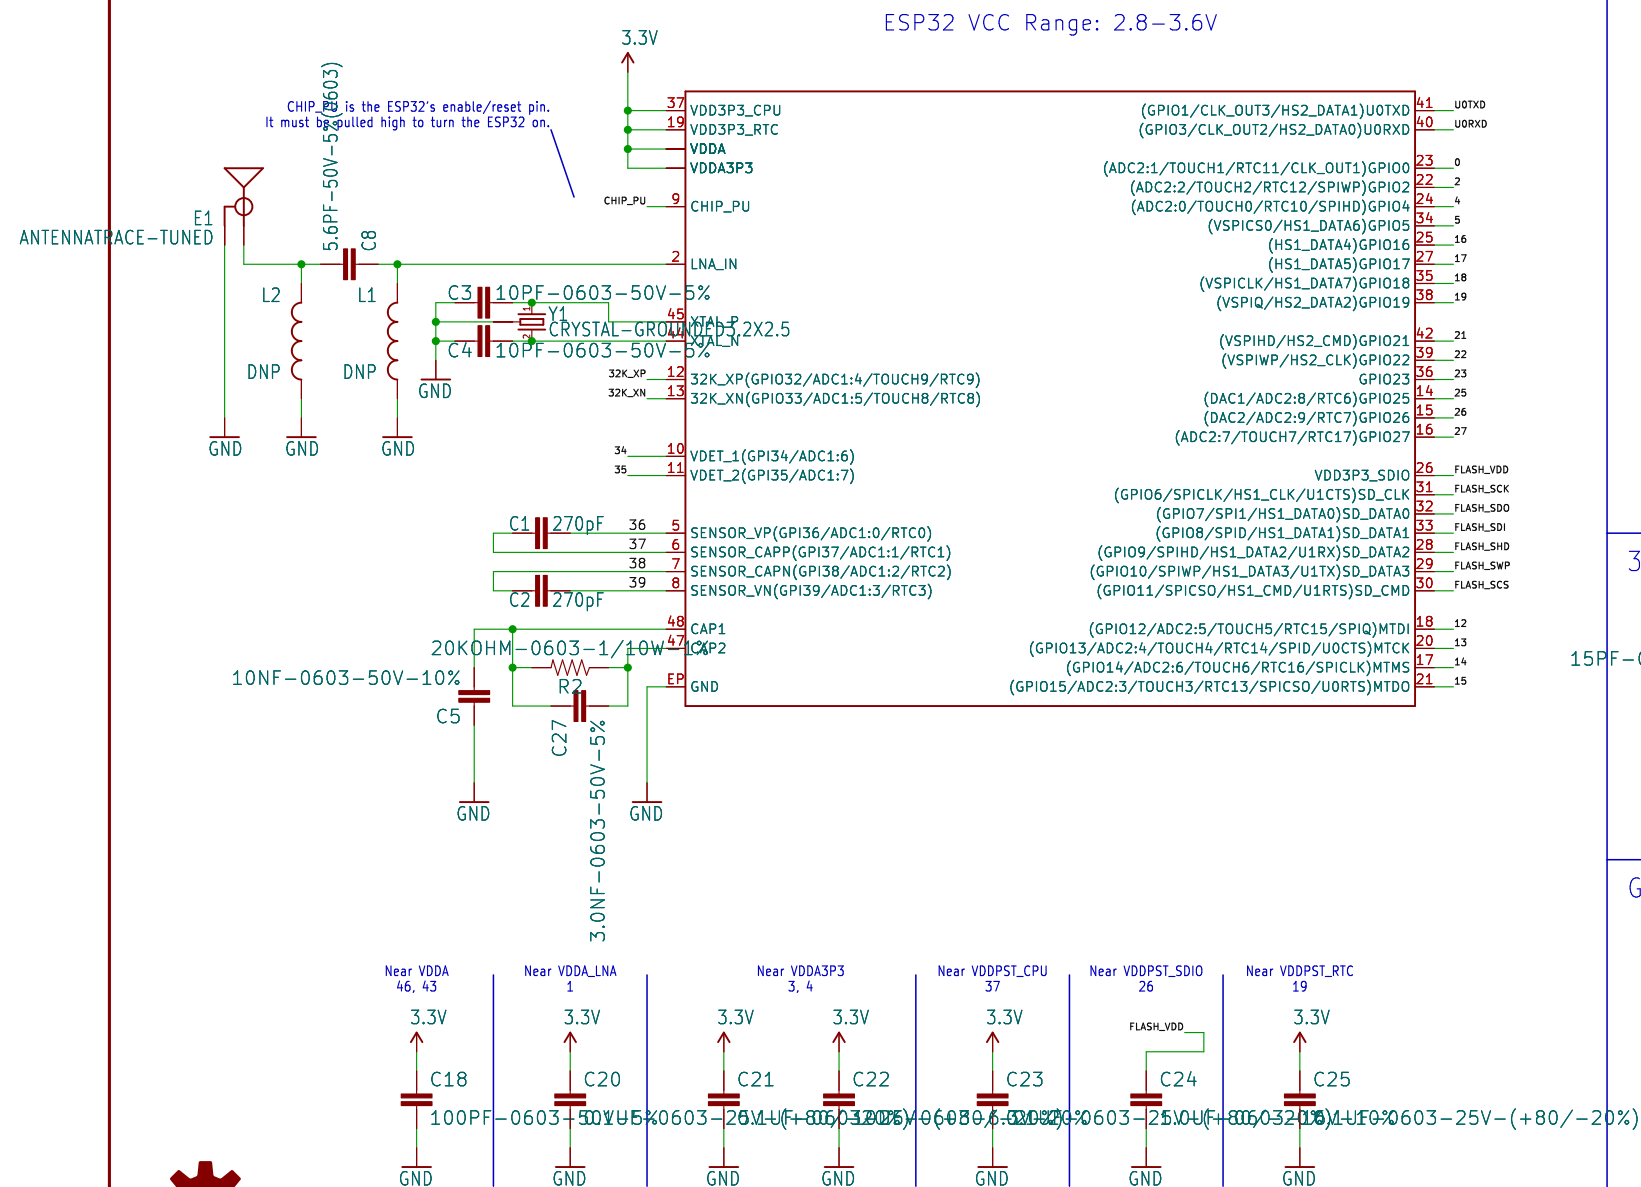


W25Q32FVSS – 4MB SPI Flash

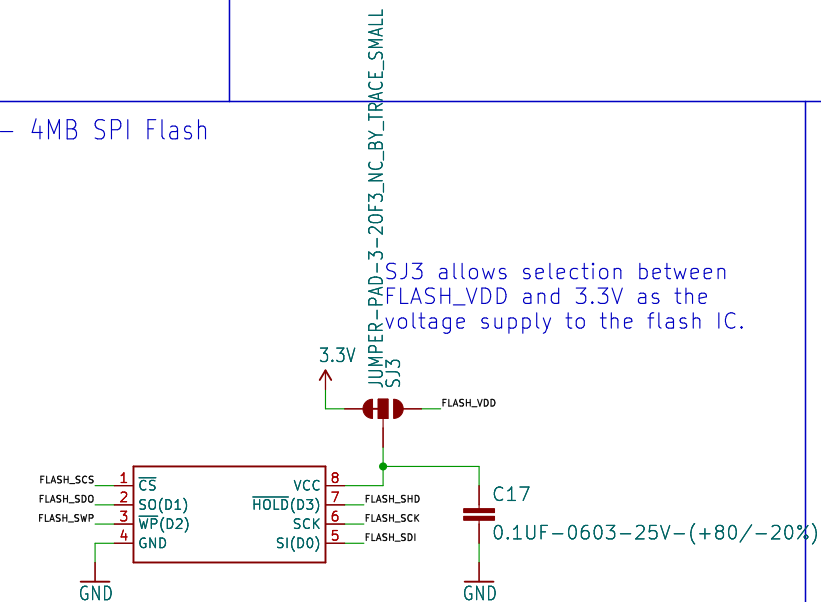


Auto-Reset

Boot Mode	Configuration Pin	Default	Boot	Download
GPIO0	1	1	0	
U0TXD	1	1	x	
GPIO2	0	x	0	
GPIO4	0	x	x	
MTD0	1	x	x	
GPIO5	1	1	x	

If U0TXD, GPIO2, GPIO5 are floating, GPIO0 determines boot mode

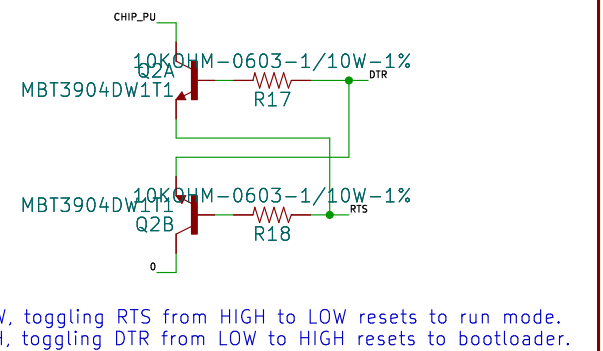

Headers

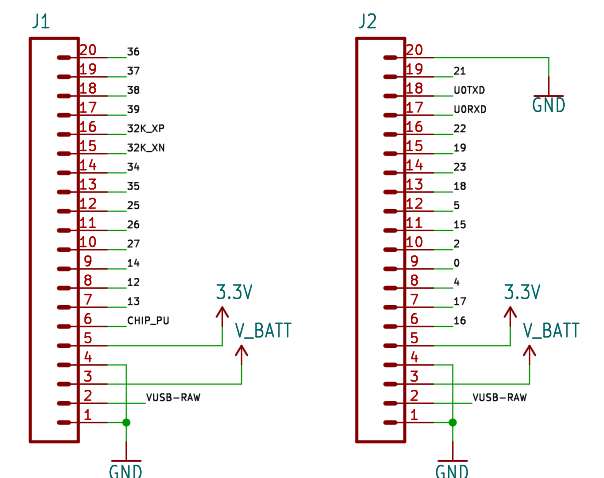

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Jim Lindblom

Sheet: /	v10
Date: \${CURRENT_DATE}	Sheet: \${#}/\${##}

Size:	User	Date:	Rev:
KiCad E.D.A.	kicad-cli	7.0.6-7.0.6-ubuntu22.04.1	Id: 1/1

