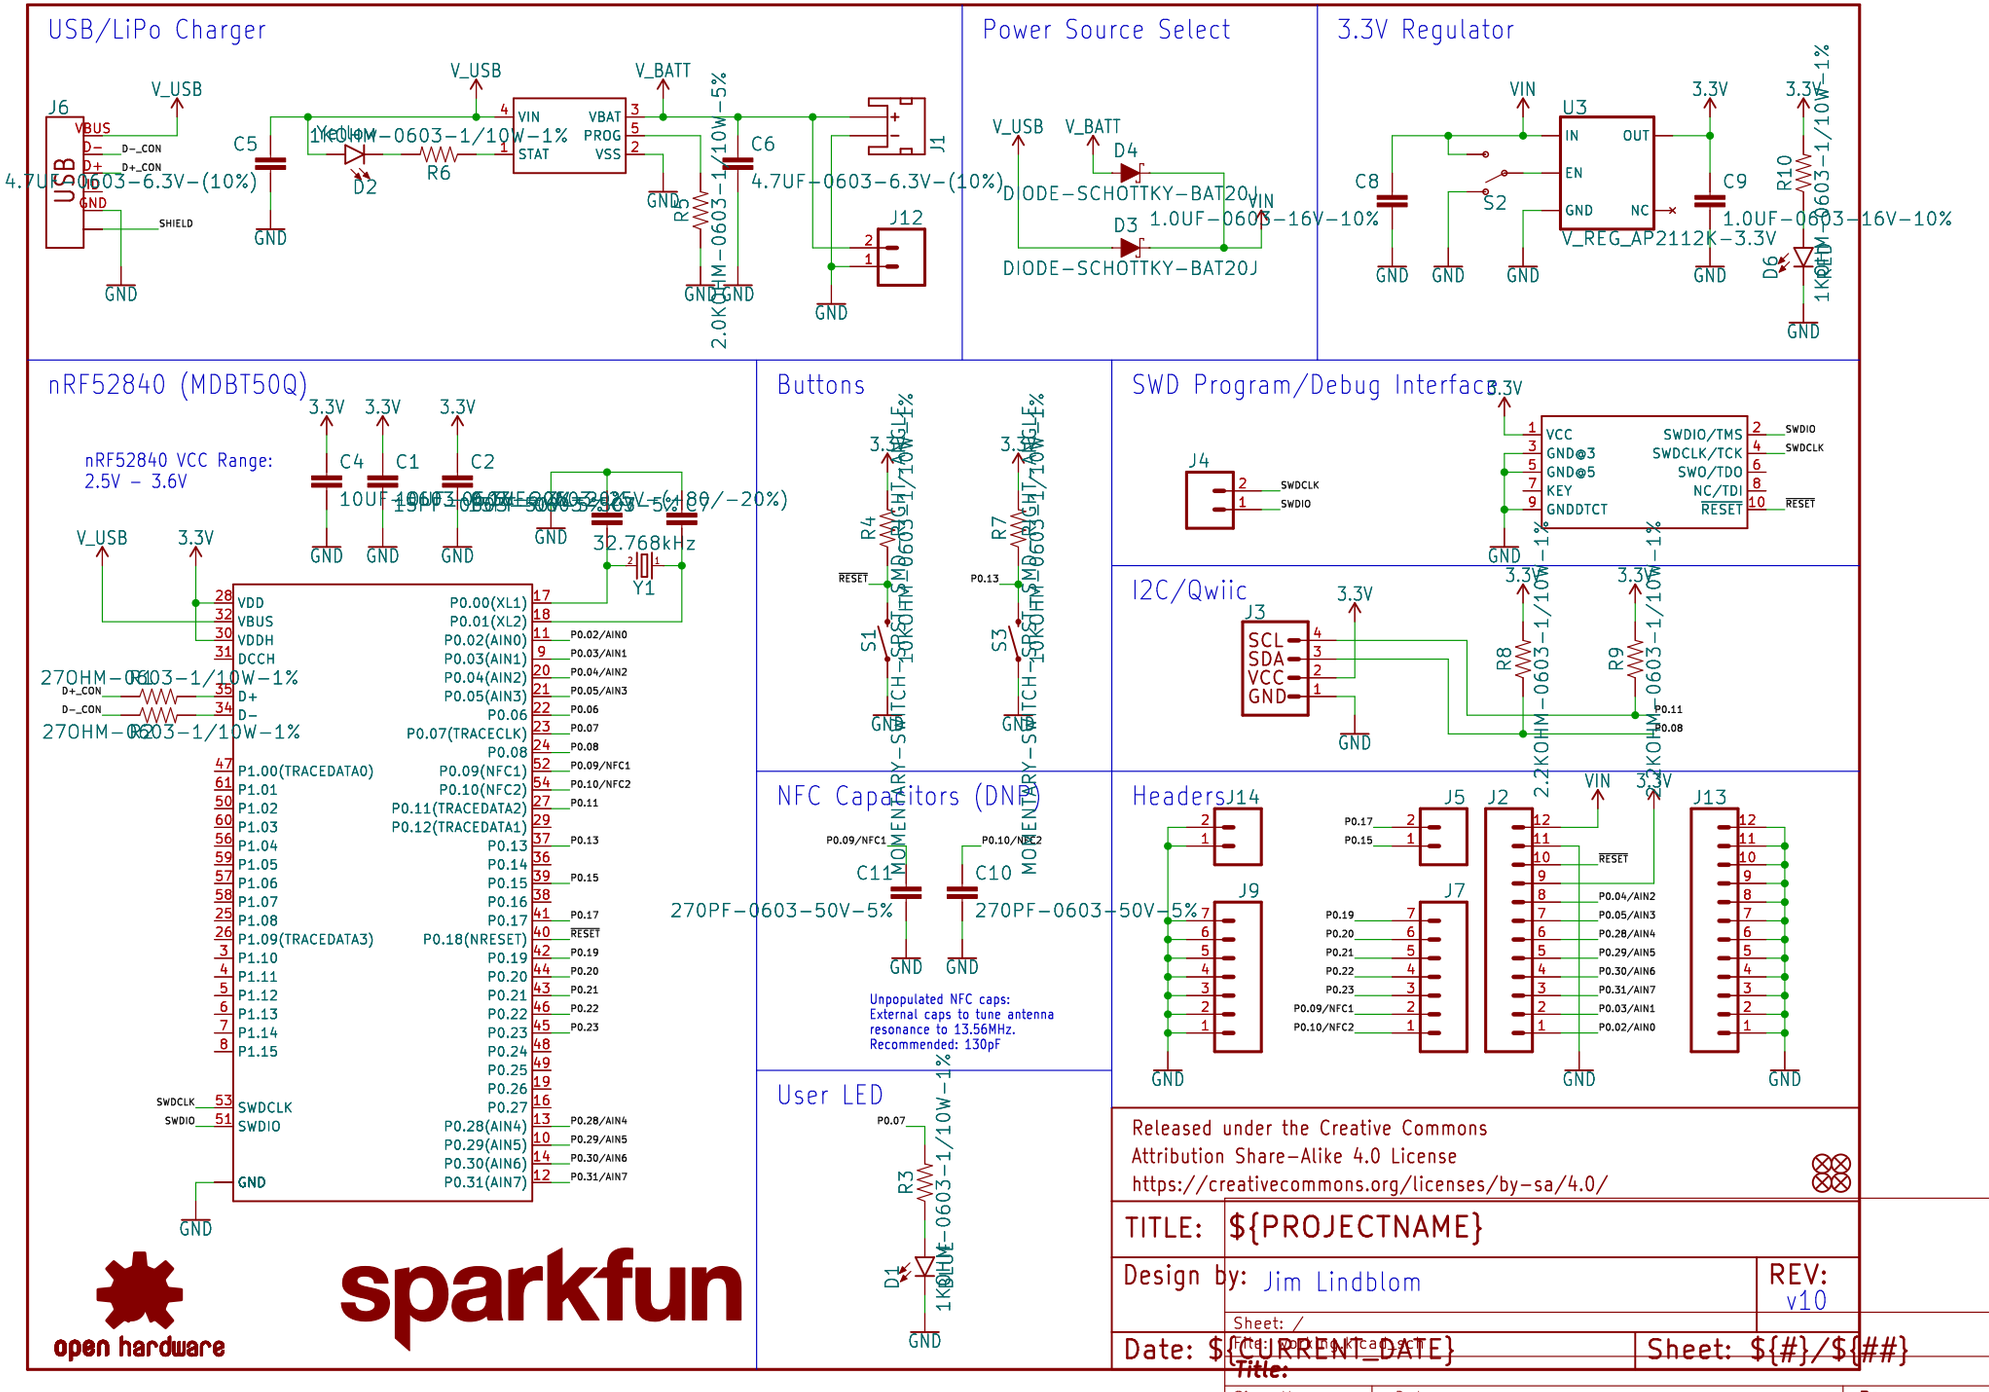
USB/LiPo Charger
Power Source Select
3.3V Regulator
nRF52840 (MDBT50Q)
Buttons
SWD Program/Debug Interface
I2C/Qwiic
NFC Capacitors (DNP)
Headers
User LED
nRF52840 VCC Range:
2.5V - 3.6V
Unpopulated NFC caps:
External caps to tune antenna
resonance to 13.56MHz.
Recommended: 130pF
Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
TITLE: ${PROJECTNAME}
Design by: Jim Lindblom
REV: v10
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Id: 1/1
sparkfun
open hardware