

The schematic diagram shows the ATWINC1500 MR210PA module connected to a 3.3V supply and ground. The module's pins are connected as follows:


- Power and Ground:** 3.3V, GND, and EN_3V are connected to the module's power pins.
- Signal Pins:** WINC_IRQ, MOSI_3V, CS_3V, MISO, SCK_3V, RXD, TXD, SDA, SCL, and GPIO18 are connected to the module's signal pins.
- LEDs:** Three LEDs (Red D3, Yellow D2, Green D1) are connected to the module's signal pins via 1K resistors (R2, R4, R5) and a 3.3V supply.
- Other Pins:** VBAT, GPIO1, CHIP_EN, VDDIO, 1.3V, GPIO15, GPIO16, and GND are also connected to the module's pins.

The module is labeled ATWINC1500 MR210PA.

Pinout diagram for the X1 microSD card. The diagram shows a 10-pin connector with the following connections:

- Pin 1 (DAT2) to GND
- Pin 2 (SD_VDD) to 3.3V
- Pin 3 (DAT1) to GND
- Pin 4 (CS) to GND
- Pin 5 (SCLK) to GND
- Pin 6 (MISO) to GND
- Pin 7 (DATA_IN) to GND
- Pin 8 (DATA_OUT) to GND
- Pin 9 (CARD_DETECT) to GND
- Pin 10 (CARD_DETECT1) to GND

The card is labeled "X1 microSD".

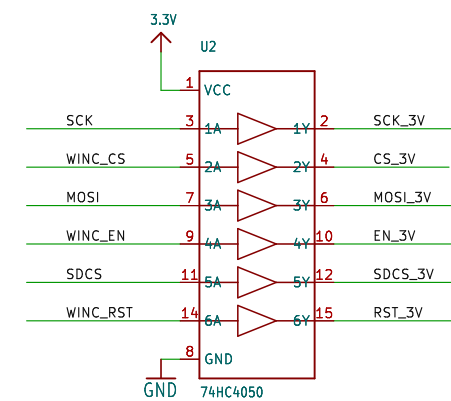

ISSUE	#{COMPANY}		③ #{YEAR}
DRAWN #{DRAWN}	TITLE		REV
CHECKED #{CHECKED}			#{REV}
DATE	DATE	DRG № #{DRGNO}	
#{DATE}	FILE: #{PROJECTNAME}	PAGE: #{#}/#{##}	