



XMOS 200 – XE216–512–TQ128 or XEF216–512–TQ128

Note: Can use XE216–512–TQ128 or XEF216–512–TQ128. XEF216–512–TQ128 has internal flash memory so do not fit SPI flash memory U802.

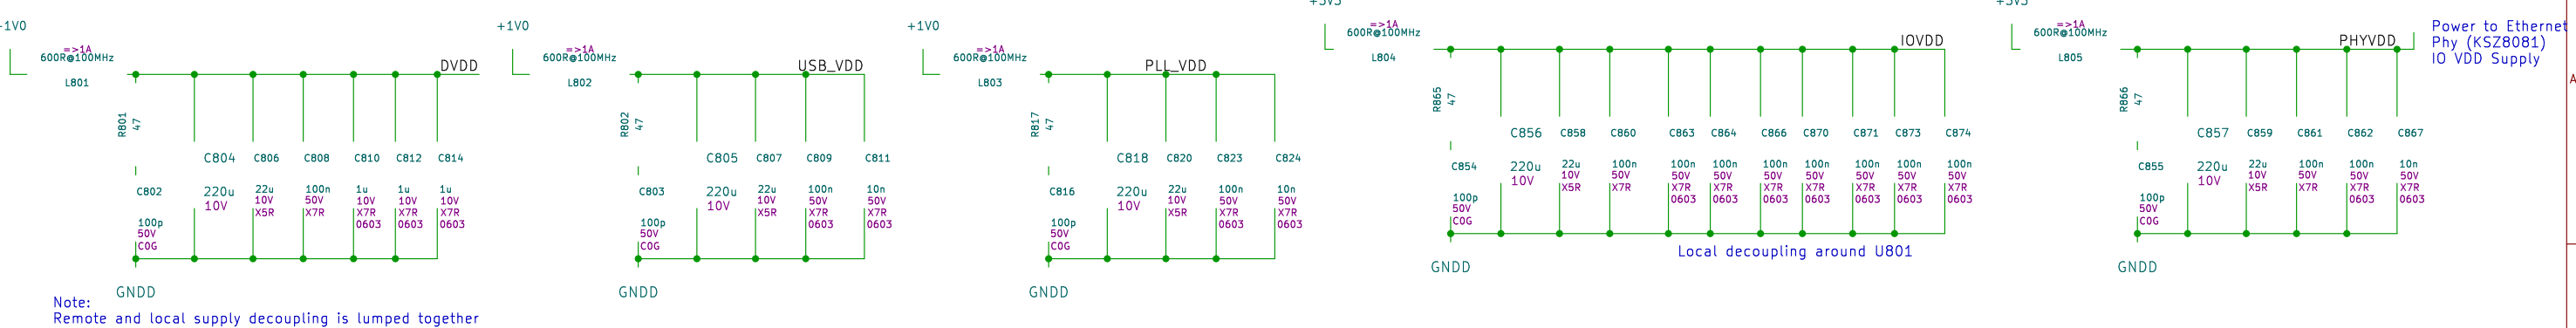


Local decoupling around U801

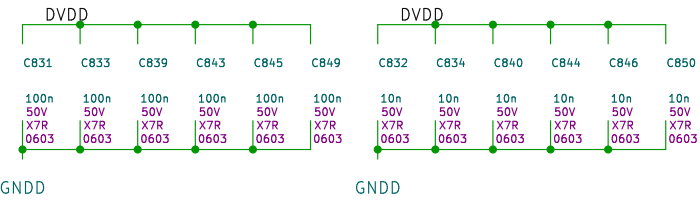


SPI Flash Memory

For use with XE–216–TQ128 part
Connects to master serial port
Uses SPI Multi I/O Bus
Size 2MBytes (16Mbits)

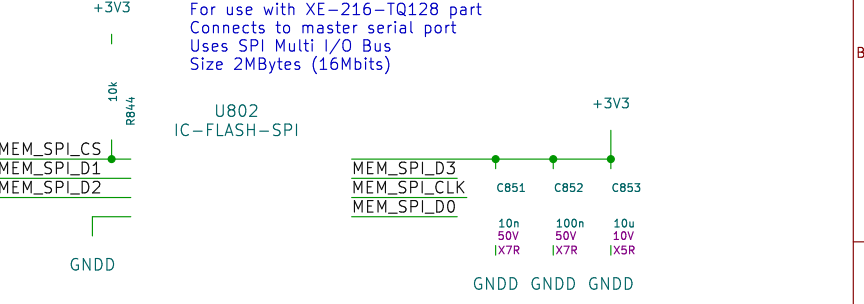


Mode Select Jumpers

To allow configuration options to be hardware selected

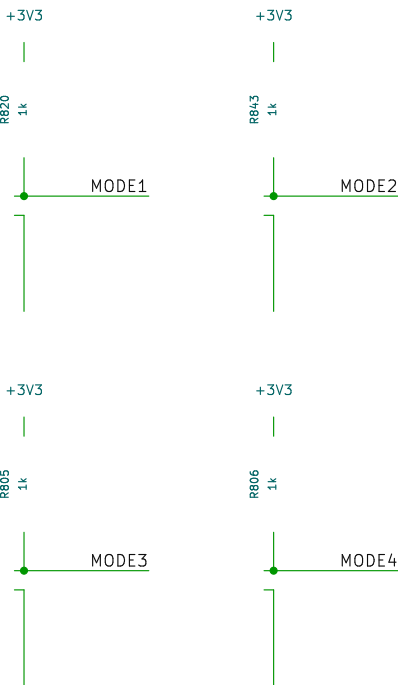

Control ports


I2C



SPI



I2C Pull-ups

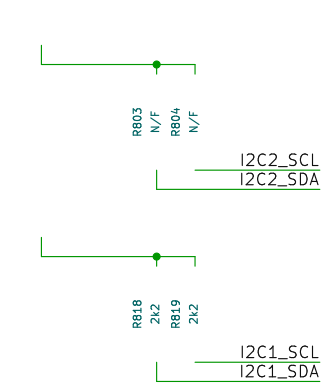


AUD_PLLSYNC	PLL_SYNC	R821	0	---
	MEM_SPI_CS	R822	0	---
	I2C1_SCL	R823	0	---
	I2C1_SDA	R824	0	---
	MEM_SPI_D0	R825	0	---
	MEM_SPI_D1	R826	0	---
	MEM_SPI_D2	R827	0	---
	MEM_SPI_D3	R828	0	---
	I2C2_SCL	R829	0	---
	I2C2_SDA	R830	0	---
	MEM_SPI_CLK	R831	0	---
	BCLK0		0	---
I2S_BCLK0	LRCLK0			---
I2S_LRCLK0	DATA0			---
I2S_DATA0				---
GPIOA				---
GPIOB				---
AUD_MUTE				---

GPIOC				---
GIPOD				---

SPDIF_RXD				---
ETH_RST				---
ETH_INT				---

ETH_MDIO	0	R874		---
ETH_MDC	0	R875		---

GPIOE				---
GPIOF				---
GPIOG				---
GPIOH				---

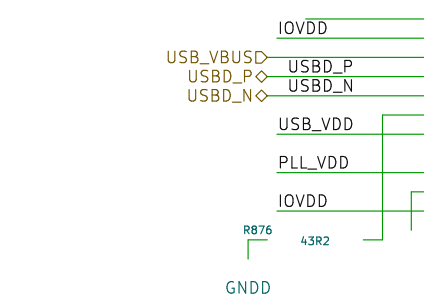

BCLK1	I2S_BCLK1
LRCLK1	I2S_LRCLK1
DATA1	I2S_DATA1
MCLKA	AUD_MCLKA
MODE1	
MODE2	

MODE3	
MODE4	
BCLK2	I2S_BCLK2
LRCLK2	I2S_LRCLK2
DATA2	I2S_DATA2
MCLKB/DATA3	AUD_MCLKB/I2S_DATA3
MCLKC/DATA4	AUD_MCLKC/I2S_DATA4
SPDIF_TX	
XL_DN0	
XL_DN1	
XL_UP0	
XL_UP1	

R877	33		ETH_TX_CLK
R878	33		ETH_TX_CTL
			ETH_RX_CLK
			ETH_RX_CTL
			ETH_RX0
			ETH_RX1
			ETH_RX2
			ETH_RX3

R879	33		XSPI_CLK
R880	33		XSPI_CS1
R881	33		XSPI_MOSI
			XSPI_MISO

R883	33		ETH_TX3
R884	33		ETH_TX2
R885	33		ETH_TX1
R886	33		ETH_TX0

R887	0		CTCK
R888	0		CTMS
R889	33		CTDO
R890	0		CTDI
R891	0		CTRST
R892	0		CRST
R893	0		QSYS_CLK

X
X