




Power Supply

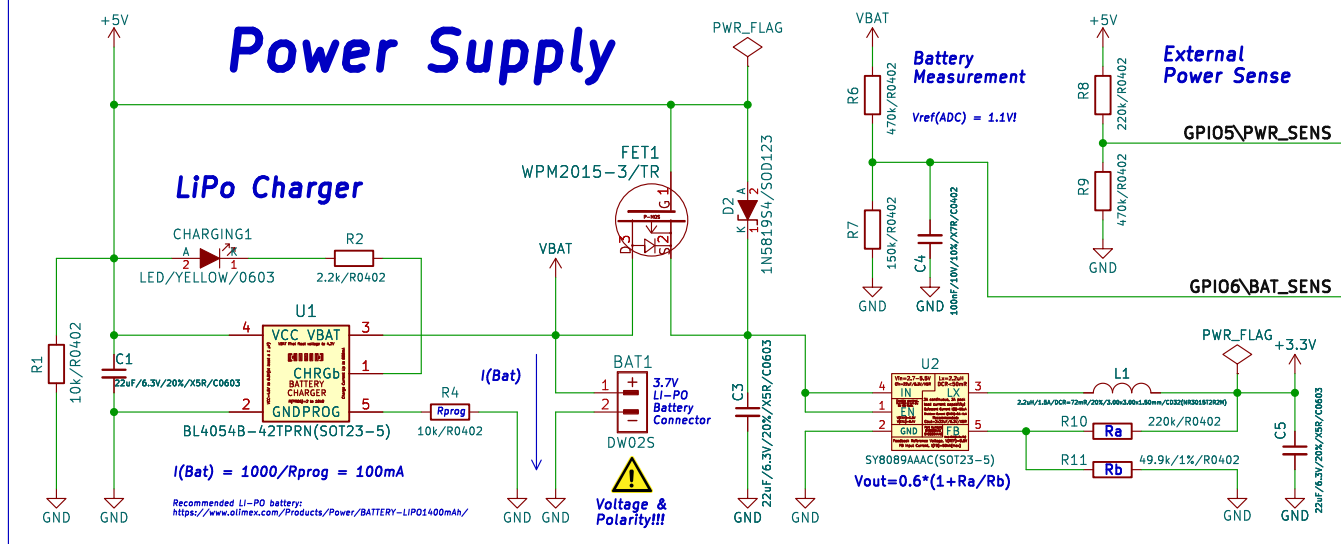

USB to UART

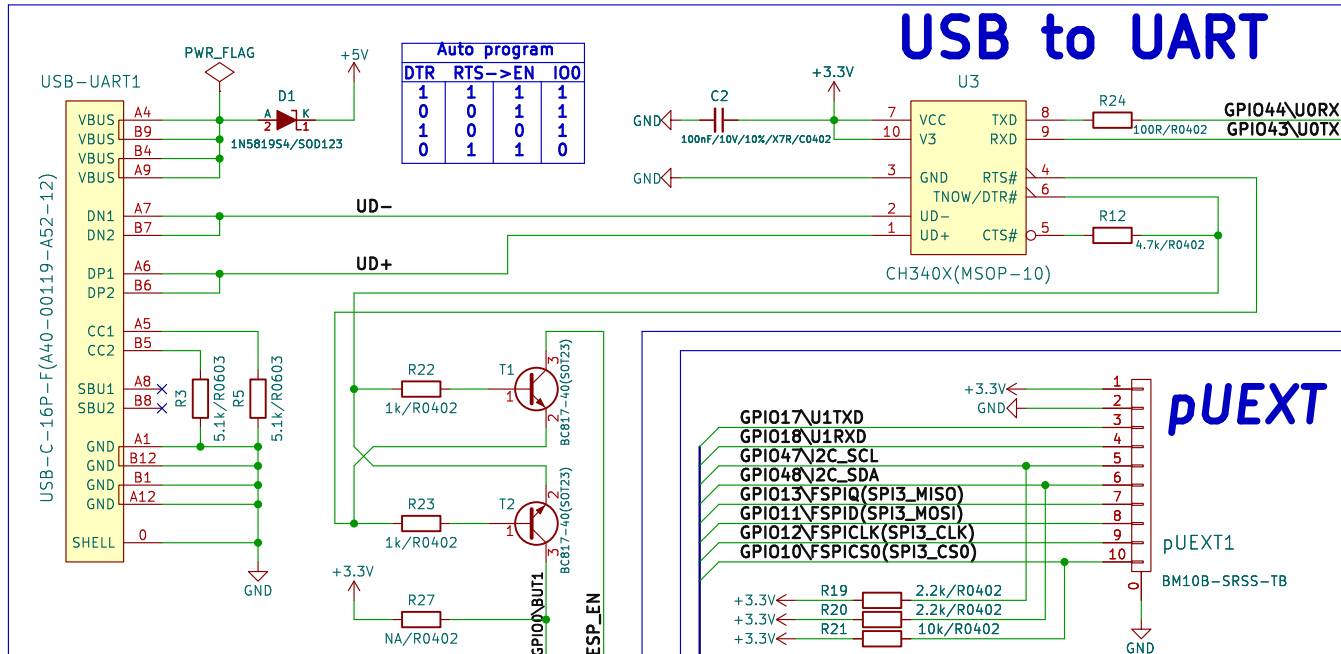


Extensions

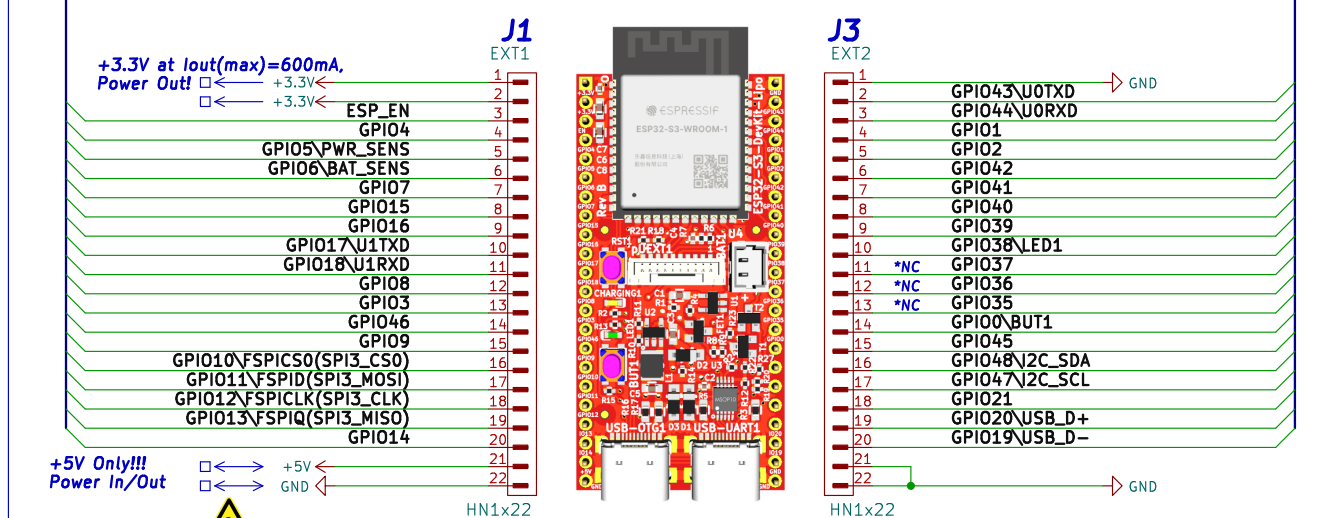


Extension's pinout is fully compatible to the Espressif's ESP32-S3-DevKitC-1.


ESP32-S3-WROOM MODULE

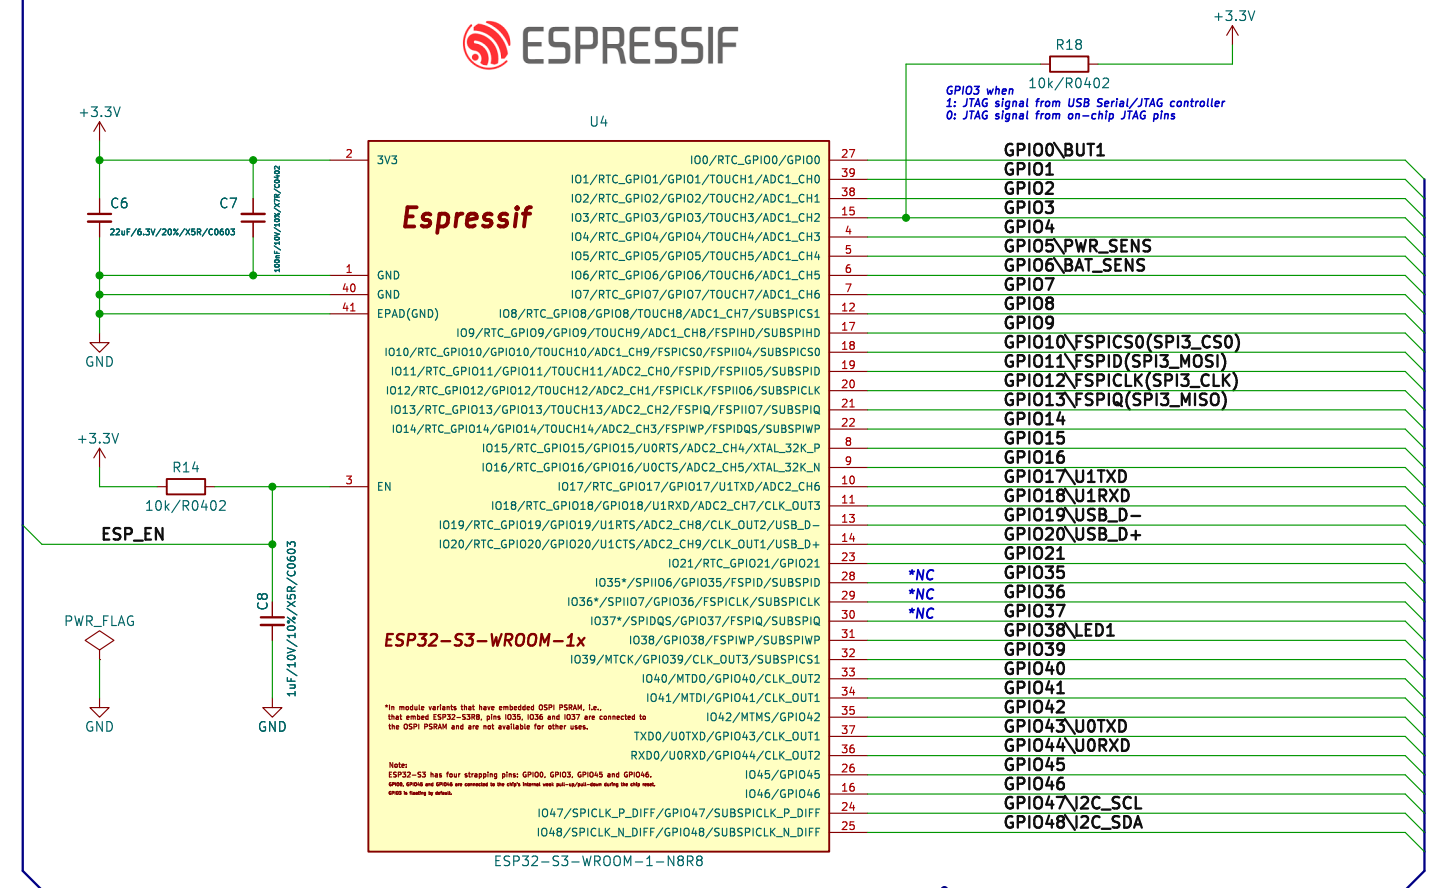


USER LED

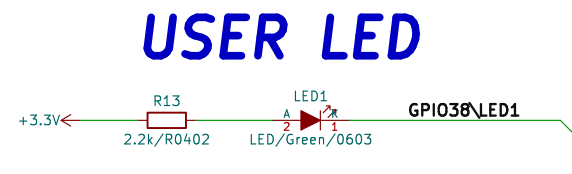


Fiducials

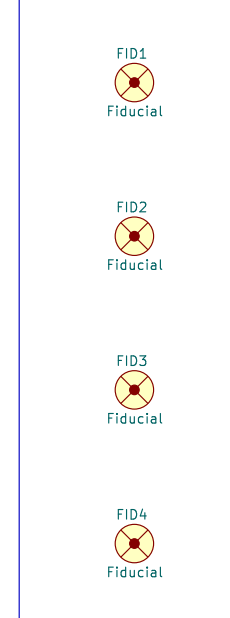


Reset Button

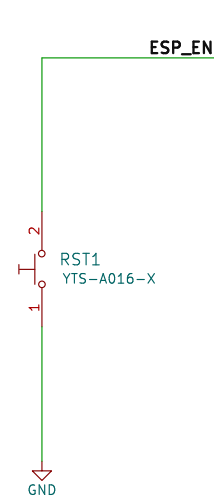

USER Button

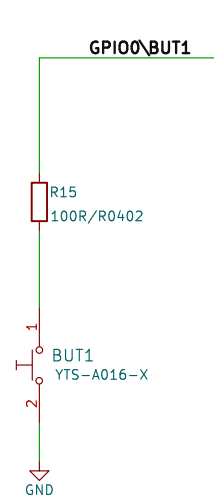

Full-speed USB 1.1 On-The-Go (OTG) interface or USB Serial/JTAG controller.
The ESP32-S3 contains an USB Serial/JTAG Controller. This unit can be used to
program the SoC's flash, read program output,
as well as attach a debugger to the running program.
The ESP32-S3 has an internal PHY, which is shared between
the USB-OTG and the USB Serial/JTAG hardware.
Either one of these can use the internal PHY.

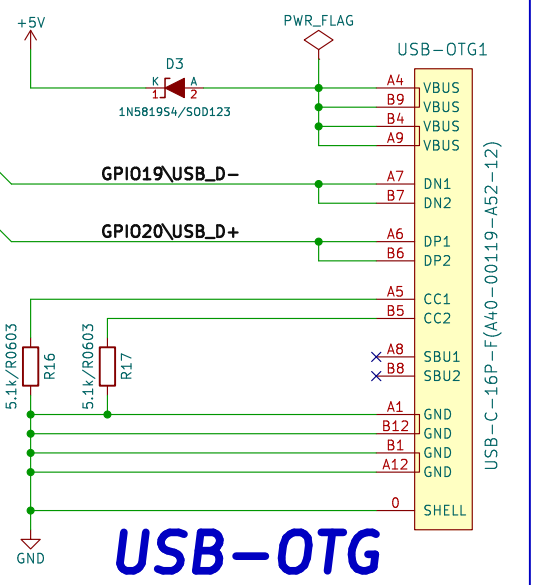

www.olimex.com
OLIMEX LTD

Sheet: /
File: working.kicad_sch

Title: ESP32-S3-DevKit-LiPo

Size: A3
KiCad E.D.A. eeschema 7.0.6

Date: 2023-05-16

Rev: B

Id: 1/1

