




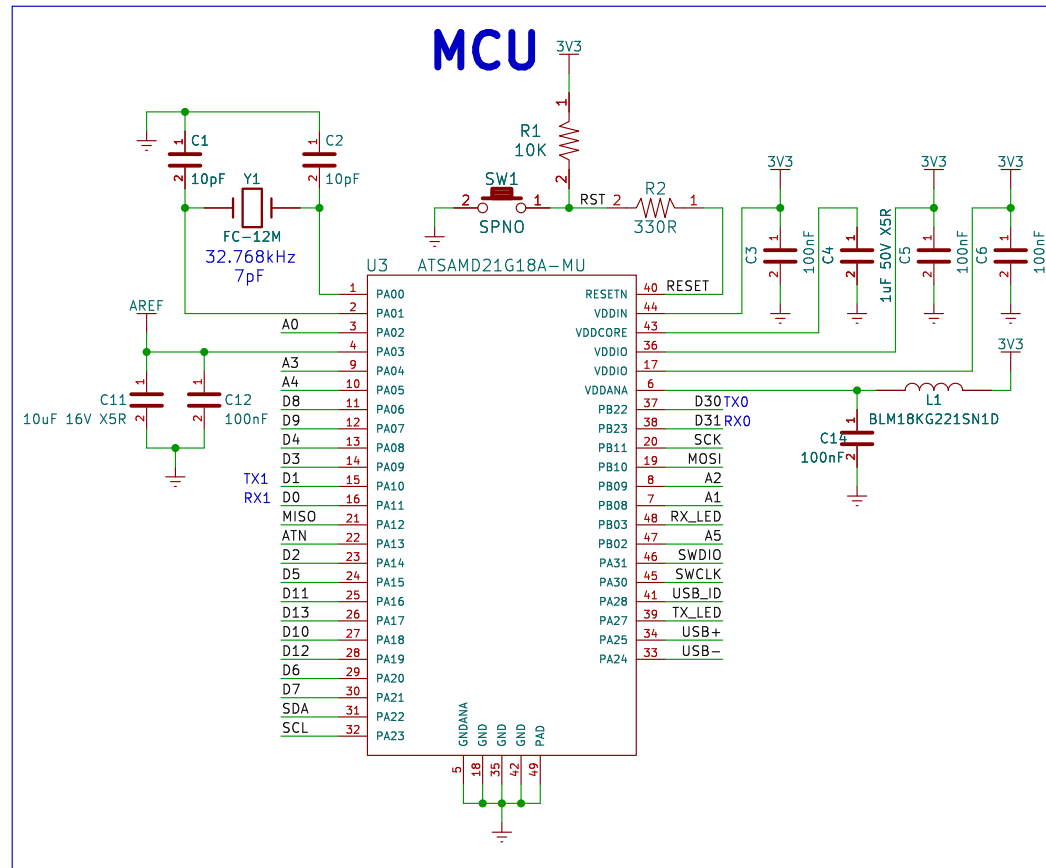


BATTERY MONITORING

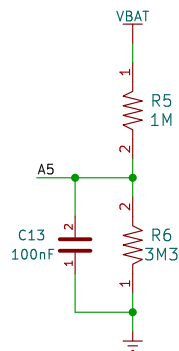

POWER MANAGEMENT

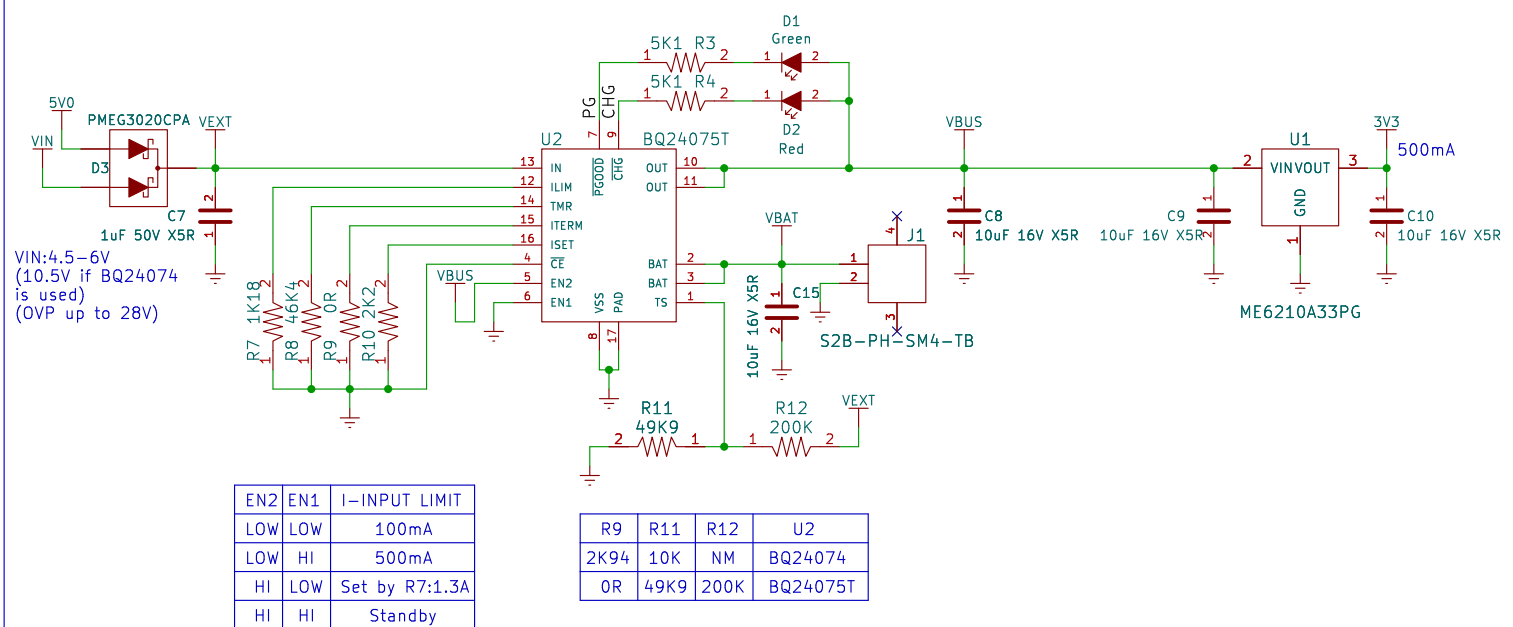


LED




MOUNTING




FIDUCIALS




USB-DEVICE

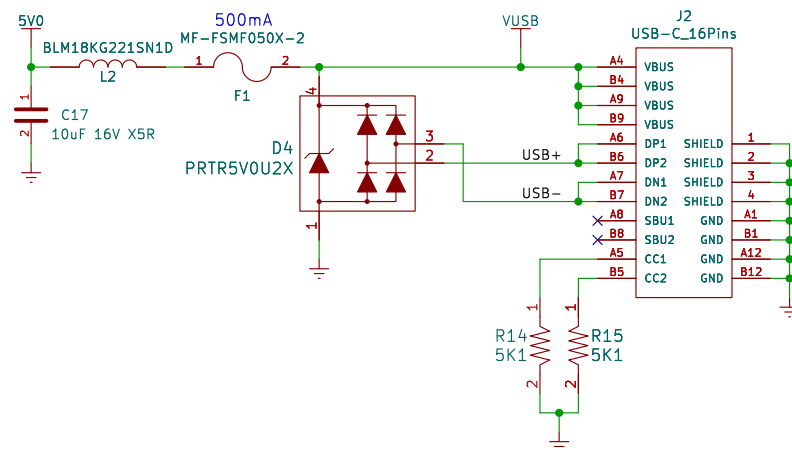


SERIAL FLASH

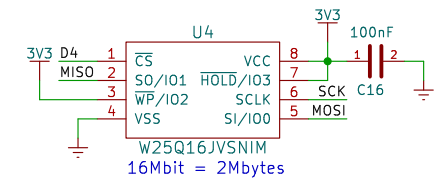


EUI-64 MAC ID

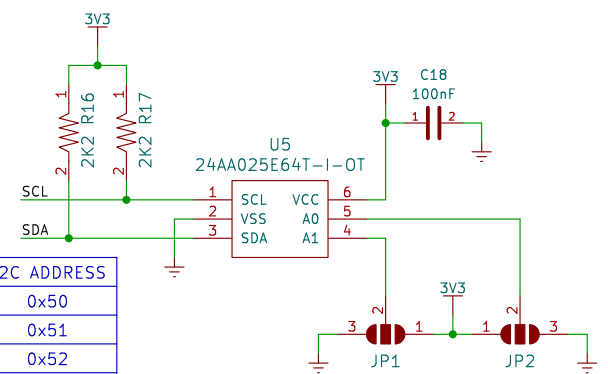


BREAKOUT

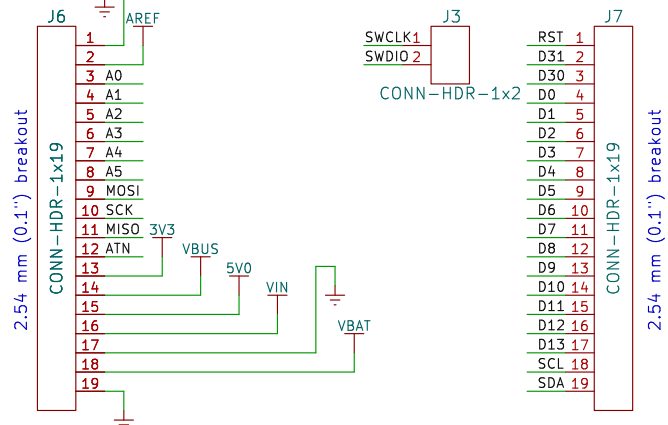

LOGO



E19-900M20S2

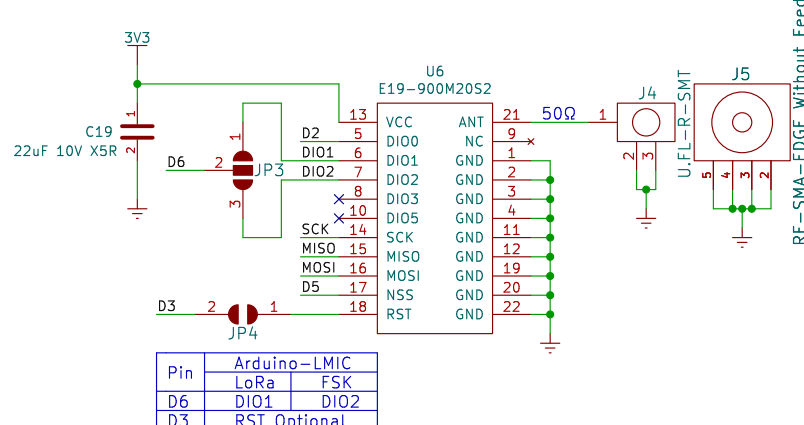

NOTES

1. All capacitors are NP0/COG 50V unless specified.
2. All resistors are 62.5mW 1% unless specified.
3. Close JP1 & JP2 to run LMIC stack.

Rocket Scream Electronics

Sheet: /
File: working.kicad_sch

Title: Mini Ultra Pro

Size: A3 Date: 2022-06-18

KiCad E.D.A. eeschema 7.0.6

Rev: 4.00

Id: 1/1