



USB Interface

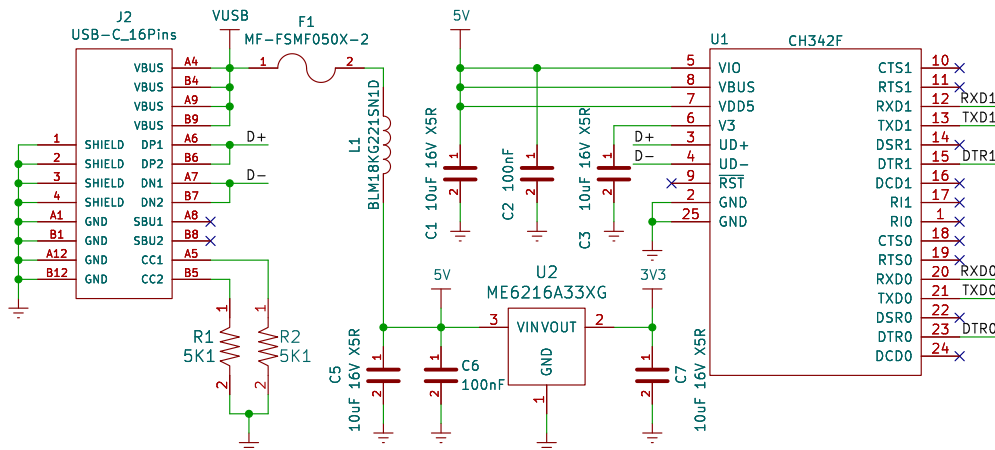


6-Pin Header



Logos




Configuration Solder Jumpers

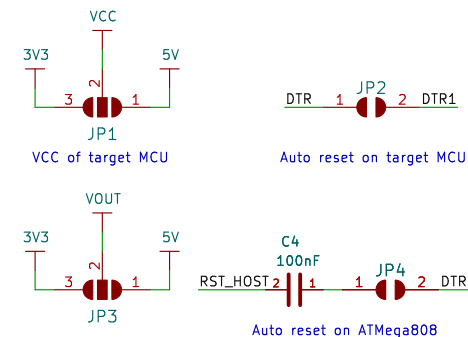

Fiducials




ATmega808

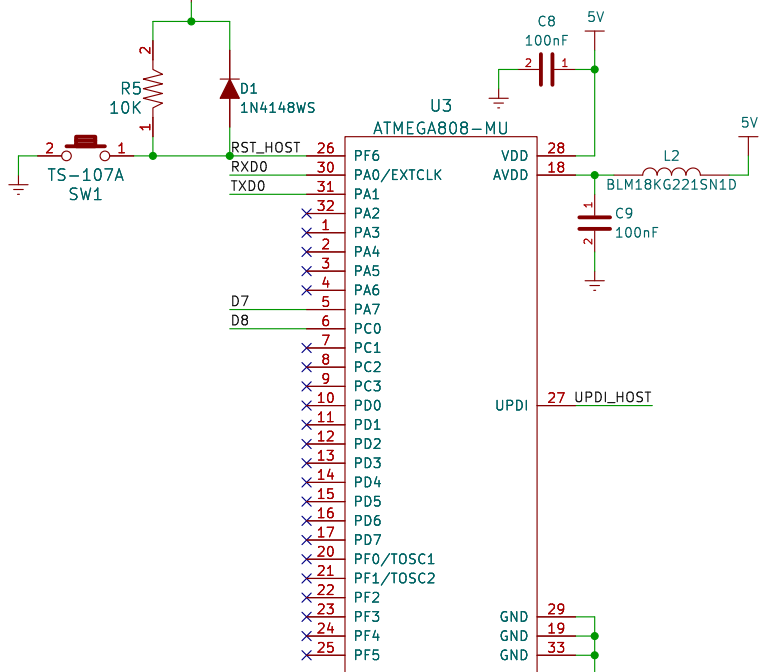


Select board variant as:
 -ATmega808/ATmega4808 32-pin standard
 -internal 16MHz oscillator
 -UART0 default pins bootloader


Indicator LEDs

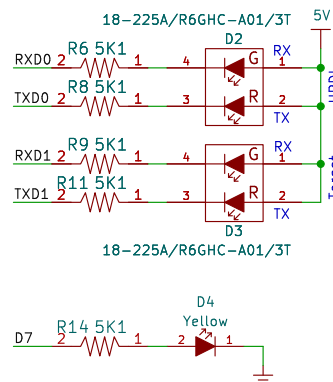

Host UPDI Test Points



Voltage Level Translator

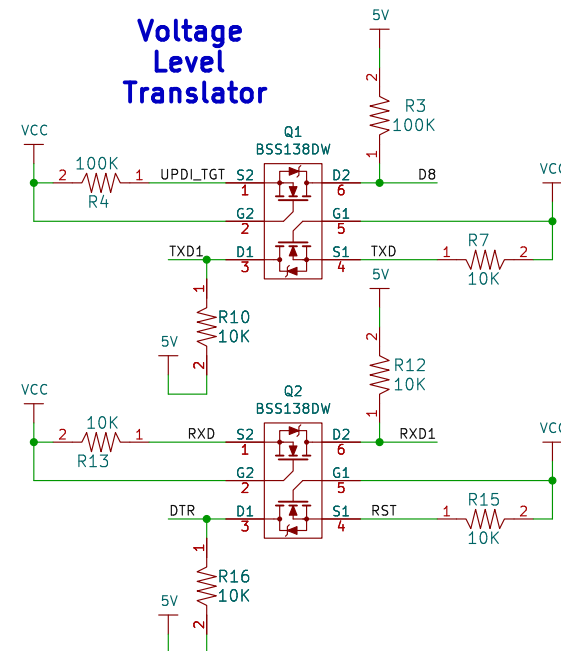

Rocket Scream Electronics

Sheet: /
 File: working.kicad_sch

Title: UPDI-USB-SERIAL

Size: A4 Date: 2022-07-17

KiCad E.D.A. eeschema 7.0.6

Rev: 2.00

Id: 1/1