

# RuuviTag Development Shield


(nRF52-DK Shield)

## Changelog (A1 -> A2):

- Remove P5 (dummy connector)
- Add more pogo pins and pin header

## Changelog (A2 -> A3):

- Add a new pogo pins for RuuviTag test points P10, P24, P25
- Add 4 additional 2.5mm alignment holes

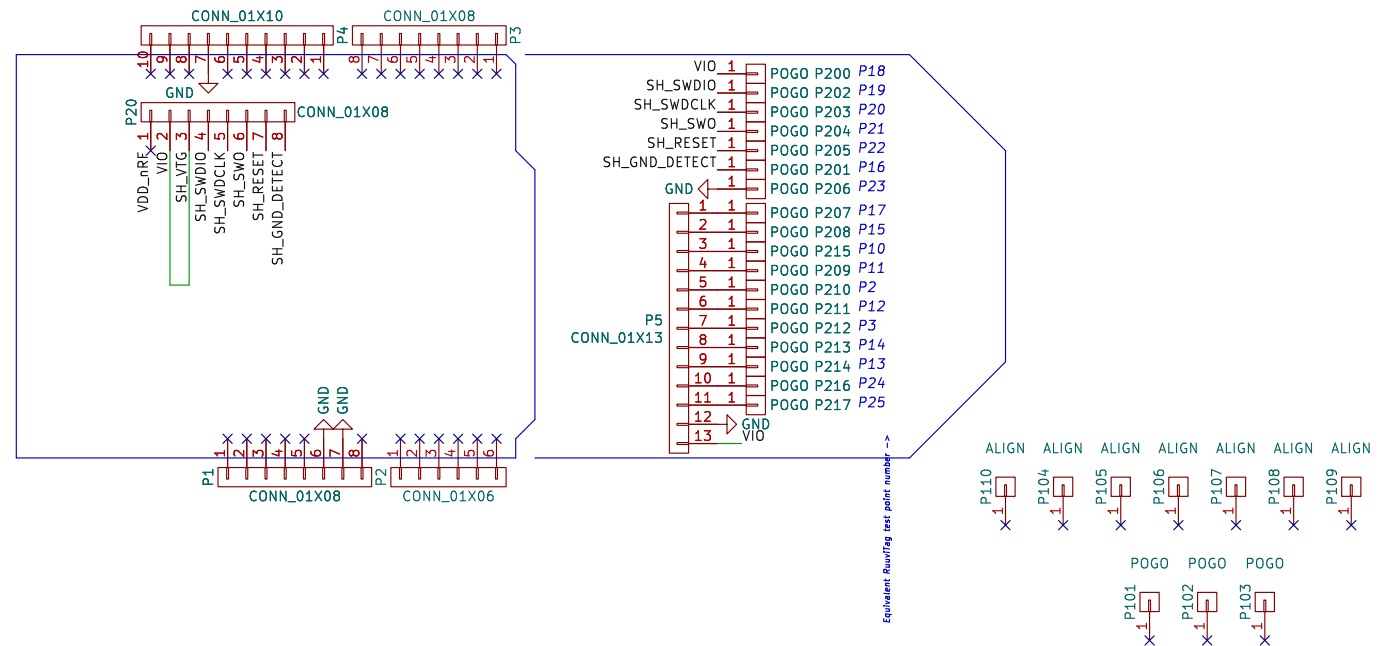

When the external board is powered, the interface MCU will detect the supply voltage of the board and program/debug the target chip on the external board instead of the on-board nRF52832.

Important: The voltage supported by external debugging/programming is 3.0 V.

You can also use P20 as a debug out connection to program shield mounted targets. For the Debug out header (P19), the Interface MCU will detect the supply voltage on the mounted shield and program/debug the shield target. If the Interface MCU detects target power on both P19 and P20, it will by default program/debug the target connected to P19.



License: <http://creativecommons.org/licenses/by-sa/4.0/>

Ruuvi Innovations Ltd. / Lauri Jämsä / lauri@ruuvi.com

Sheet: /

File: working.kicad\_sch

**Title: RuuviTag Tester**

Size: A4 Date: 2016-08-25

KiCad E.D.A. eeschema 7.0.6

Rev: A3

Id: 1/1