


3.5MM HEADPHONE/MIC

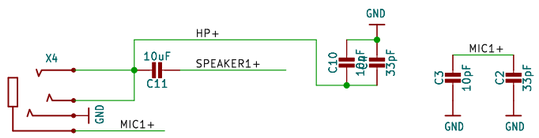


POWER DECOUPLING







ANTENNA





SIM CARD






LEVEL SHIFTING

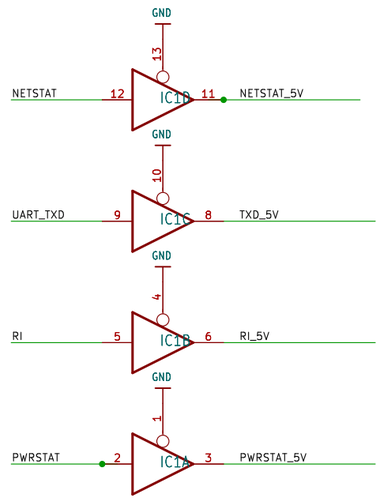


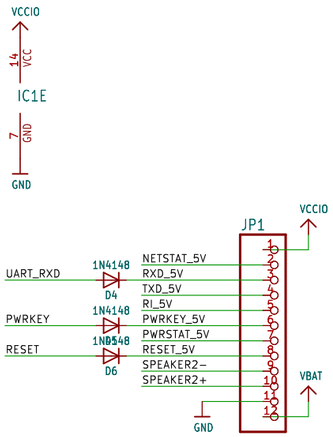


STATUS LEDS

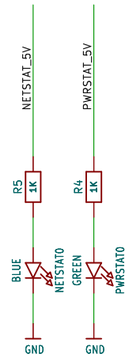


LIPO CHARGER

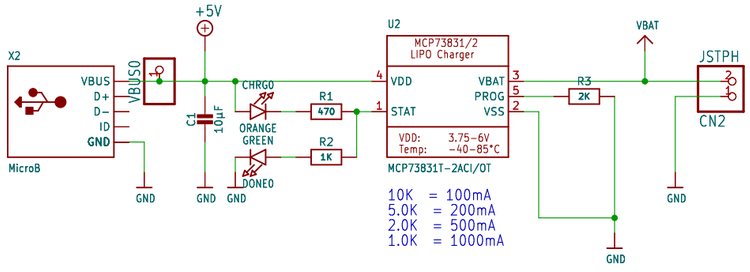

AUDIO FILTERING

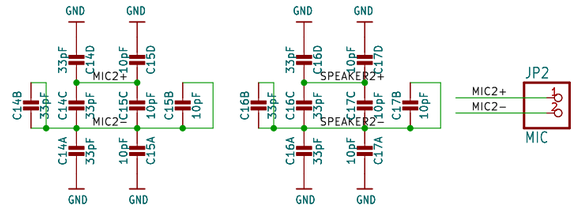

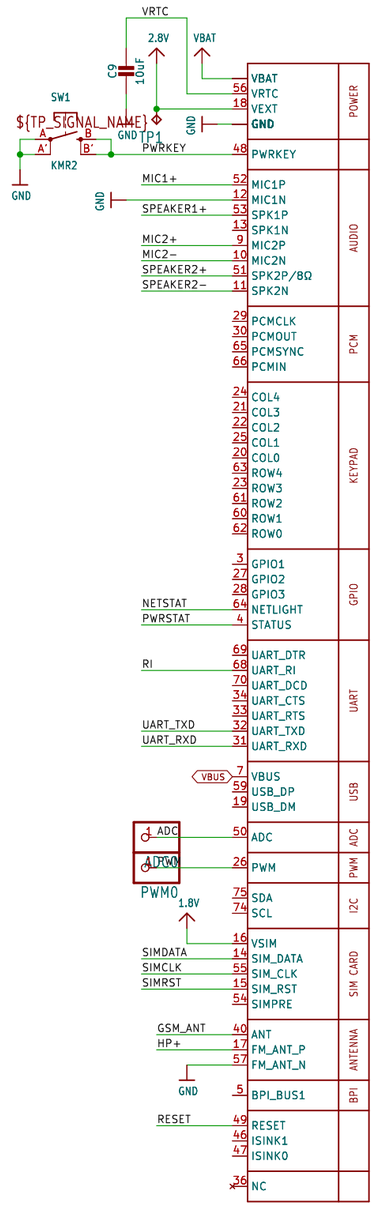

UART RI (Ring Indicator) State:
Standby = High
Voice Call = Goes low, call is established/caller hangs up goes high
Data Call = Same as voice call
SMS = Goes low, stays low 120ms, high
URC = Goes low, stays low 120ms,
URCs reported, high
Making a Call = RI always stays high

ISSUE	${COMPANY}	© 2014
DRAWN ${DRAWN}	TITLE	REV ${REV}
CHECKED ${CHECKED}	DATE ${CURRENT_DATE}	DRG № ${DRGNO}
DATE ${DATE}	FILE: ${PROJECTNAME}.kicad_sch	PAGE: ${#}/${##}

File: working.kicad_sch	Sheet:	Title:
Size: User	Date:	Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1		Id: 1/1