



Power Supply +5V

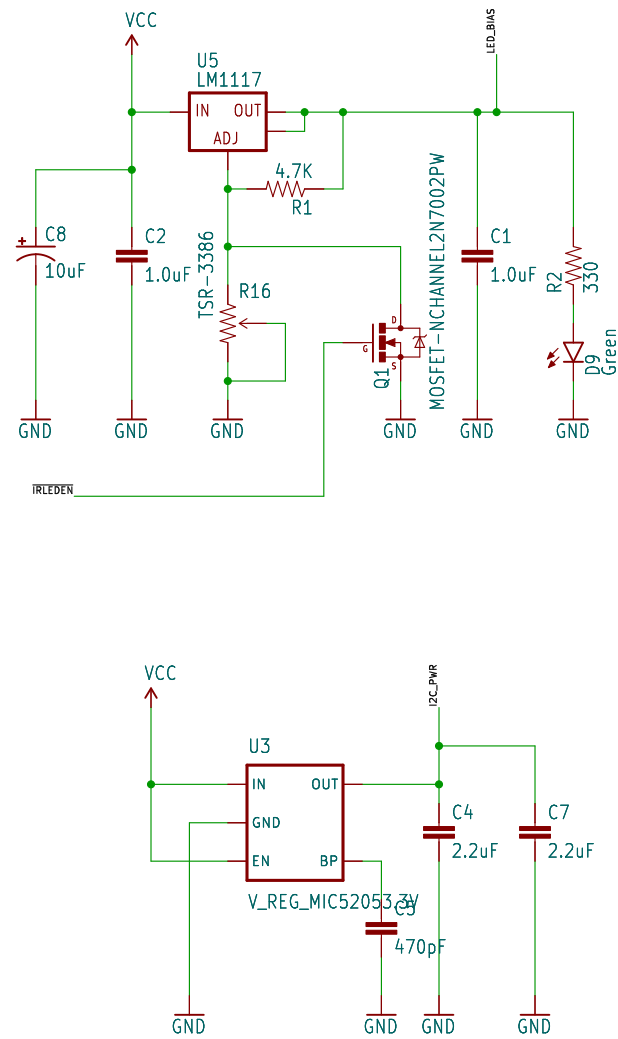


Sensors

High order nibble

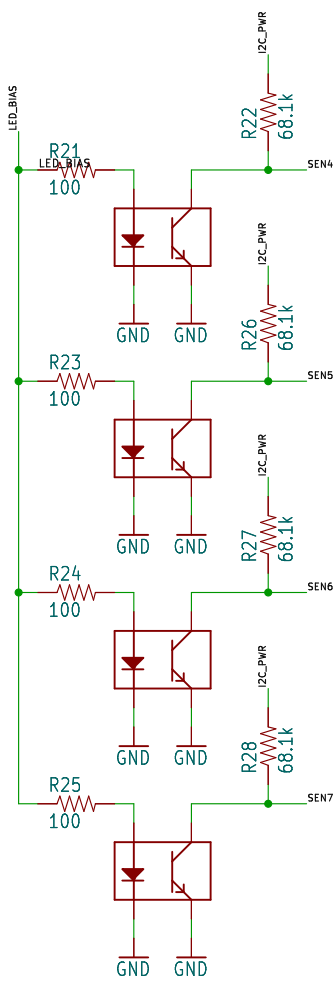

Low order nibble

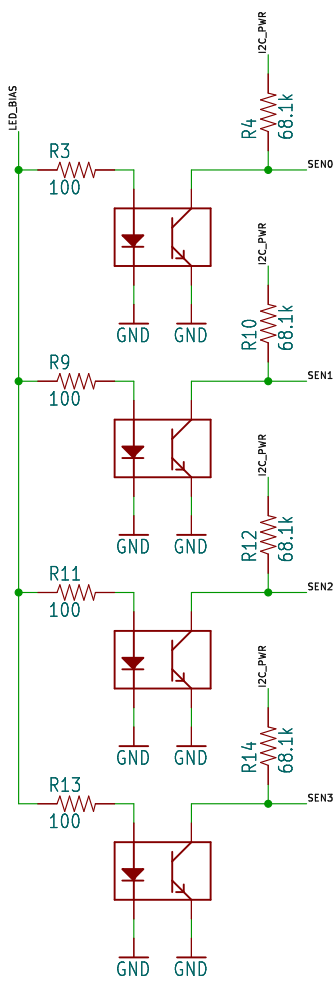



High order nibble




Low order nibble



Buffers

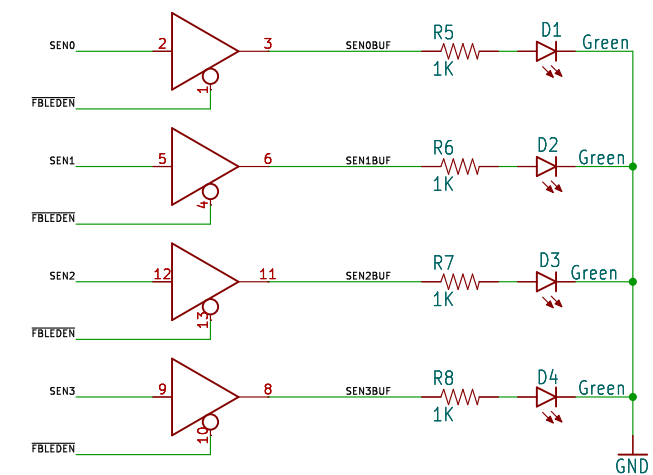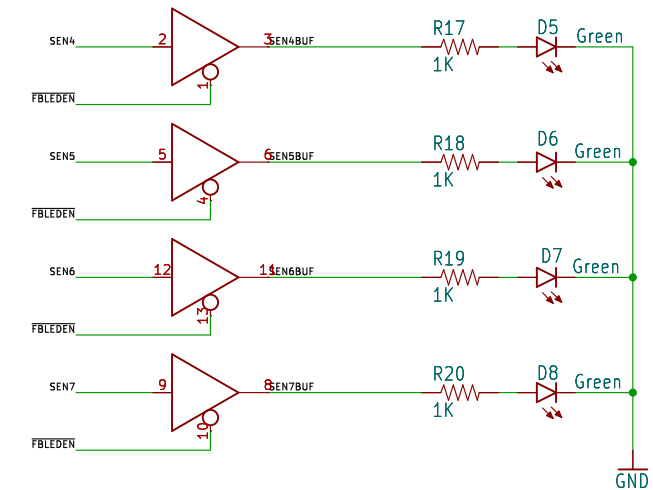

I2C Expander

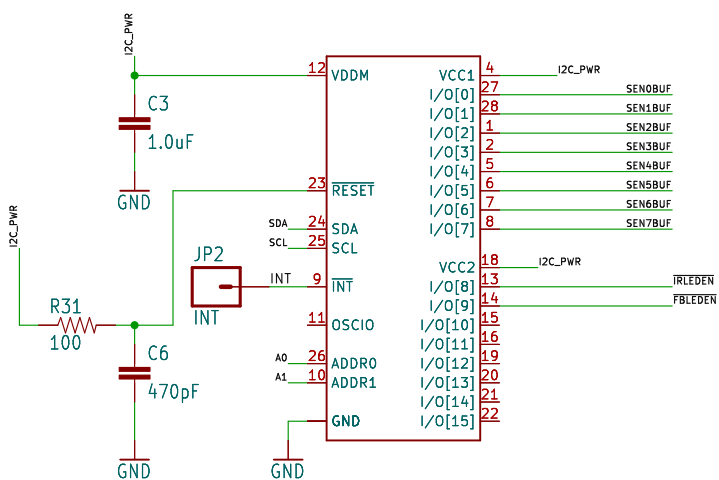

Possible I2C addresses

A1:A0	I2C Address
00	0x3E (0111110b)
01	0x3F (0111111b)
10	0x70 (1110000b)
11	0x71 (1110001b)


Set I2C address with SJ1 and SJ2

JUMPER-PAD-3-20F3_NC_BY_PASTE SJ2

JUMPER-PAD-3-20F3_NC_BY_PASTE SJ1

RedBot Interface

Open SJ3 to disconnect I2C pull-up resistors
Move SJ5 to make interface 5v

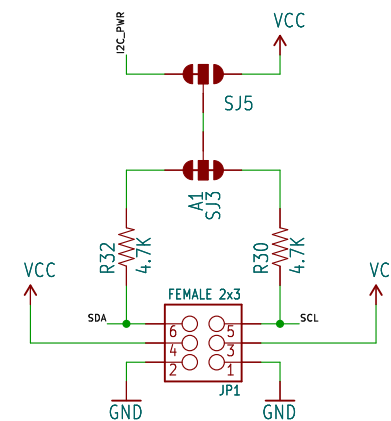

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Marshall Taylor

Rev:
V10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Sheet: /
File: working.kicad_sch

Title:

Size: User Date:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev:
Id: 1/1