



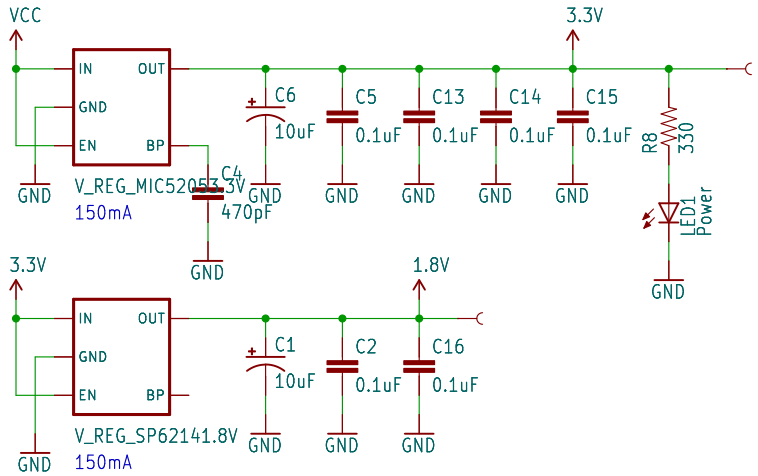

Power

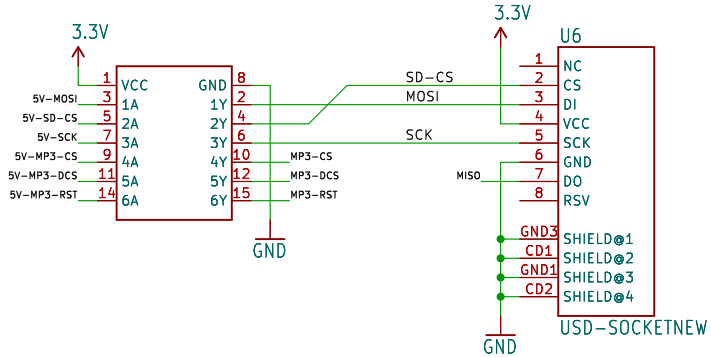


microSD

New on v1.3:
Added microSD
Added 74HC4050 LVL Converter
Moved LED to 3.3V rail to load regulator

New on v1.4:
Added solder jumper to select between GBUF and GND
Update to Arduino R3 shield type
Updated version code
Added OSHW mark
Changed all 0402 footprints to 0603 for easier optical inspection
Added transient free line-out connection
Added MUTE
RST now pulled low by default
Moved to tighter SOIC FP on HEX inverter
Touched up 3.5mm jack footprint


New on v1.5:
Removed MUTE line.
Reworked the v1.4 DC-blocking circuit,
made it selectable via jumpers SJ3, SJ4, SJ5.

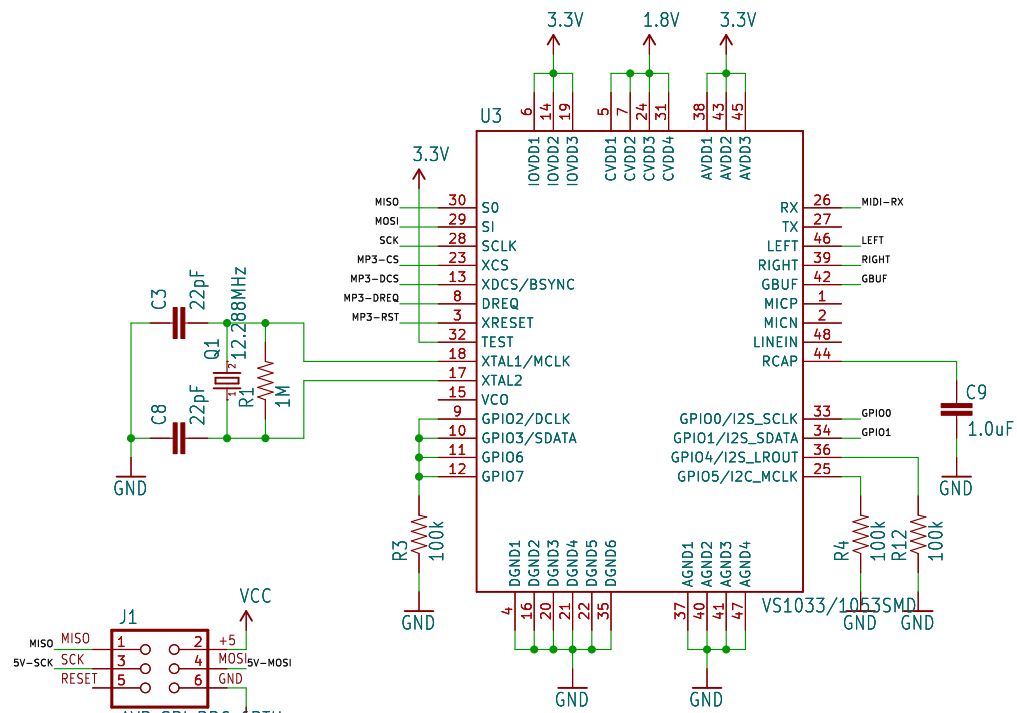

VS1053

Populate with 2x3 female connector
to be compatible with Leonardo/Mega

GPI00 low / GPI01 low puts VS1053 in MP3 mode
GPI00 low / GPI01 high puts VS1053 in MIDI mode

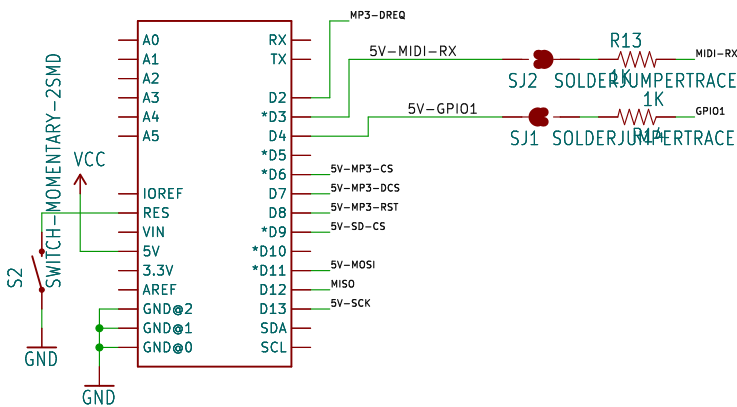


Arduino

Line Out to Speakers or Amplifier

Solder Jumpers 3, 4, 5 configure outputs:

Default configuration: solder blob between top
and middle pads for DC-coupled output to
headphones or passive speakers.
Desolder default and add solder blob between
middle and bottom pads for AC-coupled line output.

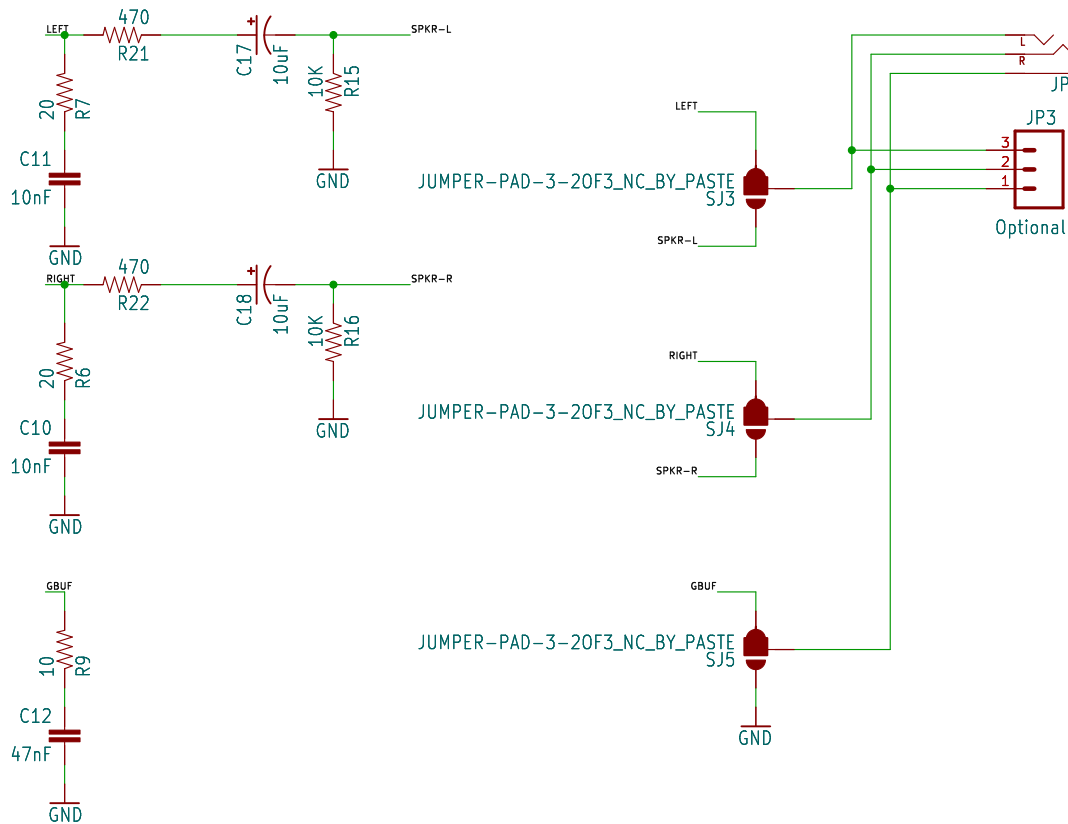

Released under the Creative Commons Attribution Share-Alike 3.0 License http://creativecommons.org/licenses/by-sa/3.0		SFE
TITLE: \${PROJECTNAME}		⊗ ⊗
Design by: C. Taylor, N. Seidle	REV: v1.5	
Revision By: Byron Jacquot		
Date: \${CURRENT_DATE}	Sheet: \${#}/\$({##})	
Size: User	Date:	Rev:
KiCad E.D.A.	kiCad - cli 7.0.6-7.0.6-ubuntu22.04.1	Id: 1/1