




Power Switching & Voltage Regulation

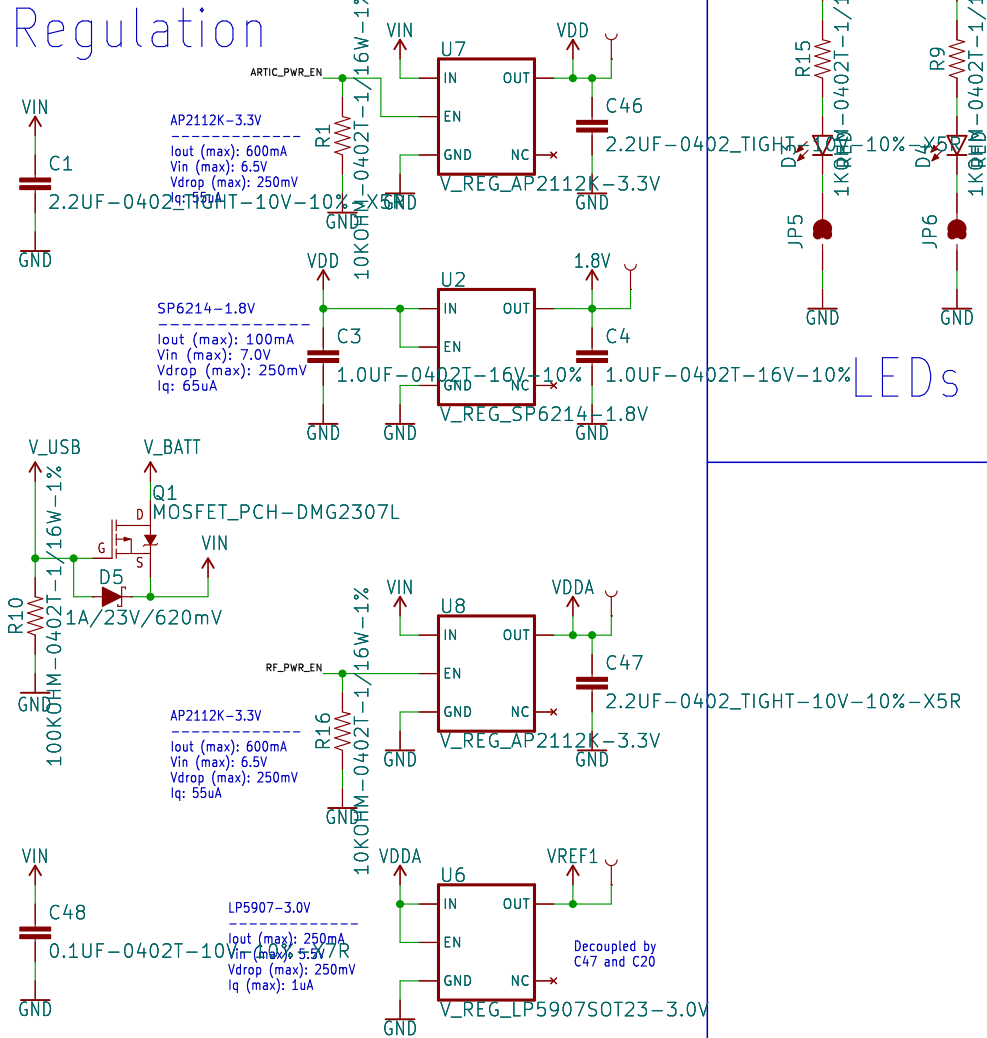


LEDs

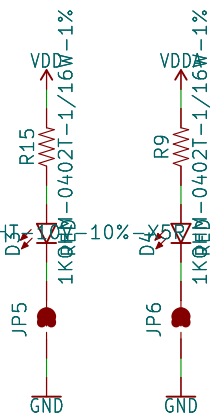


Flash Memory

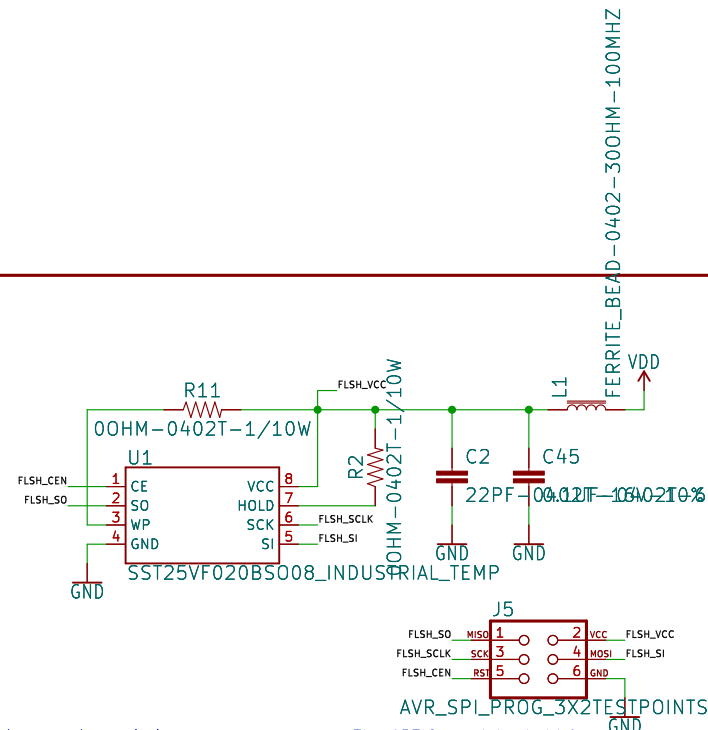


Antenna Switch

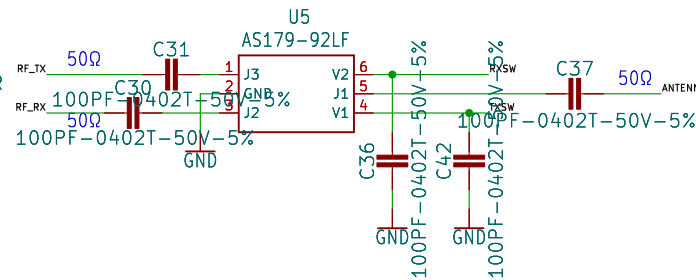



Antenna



Gain Opto-Isolation

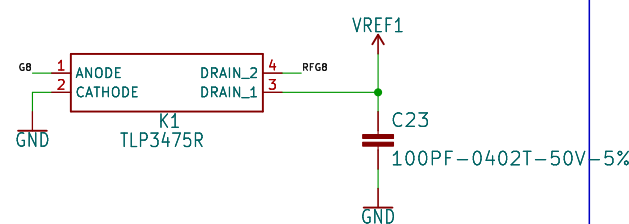

Pins

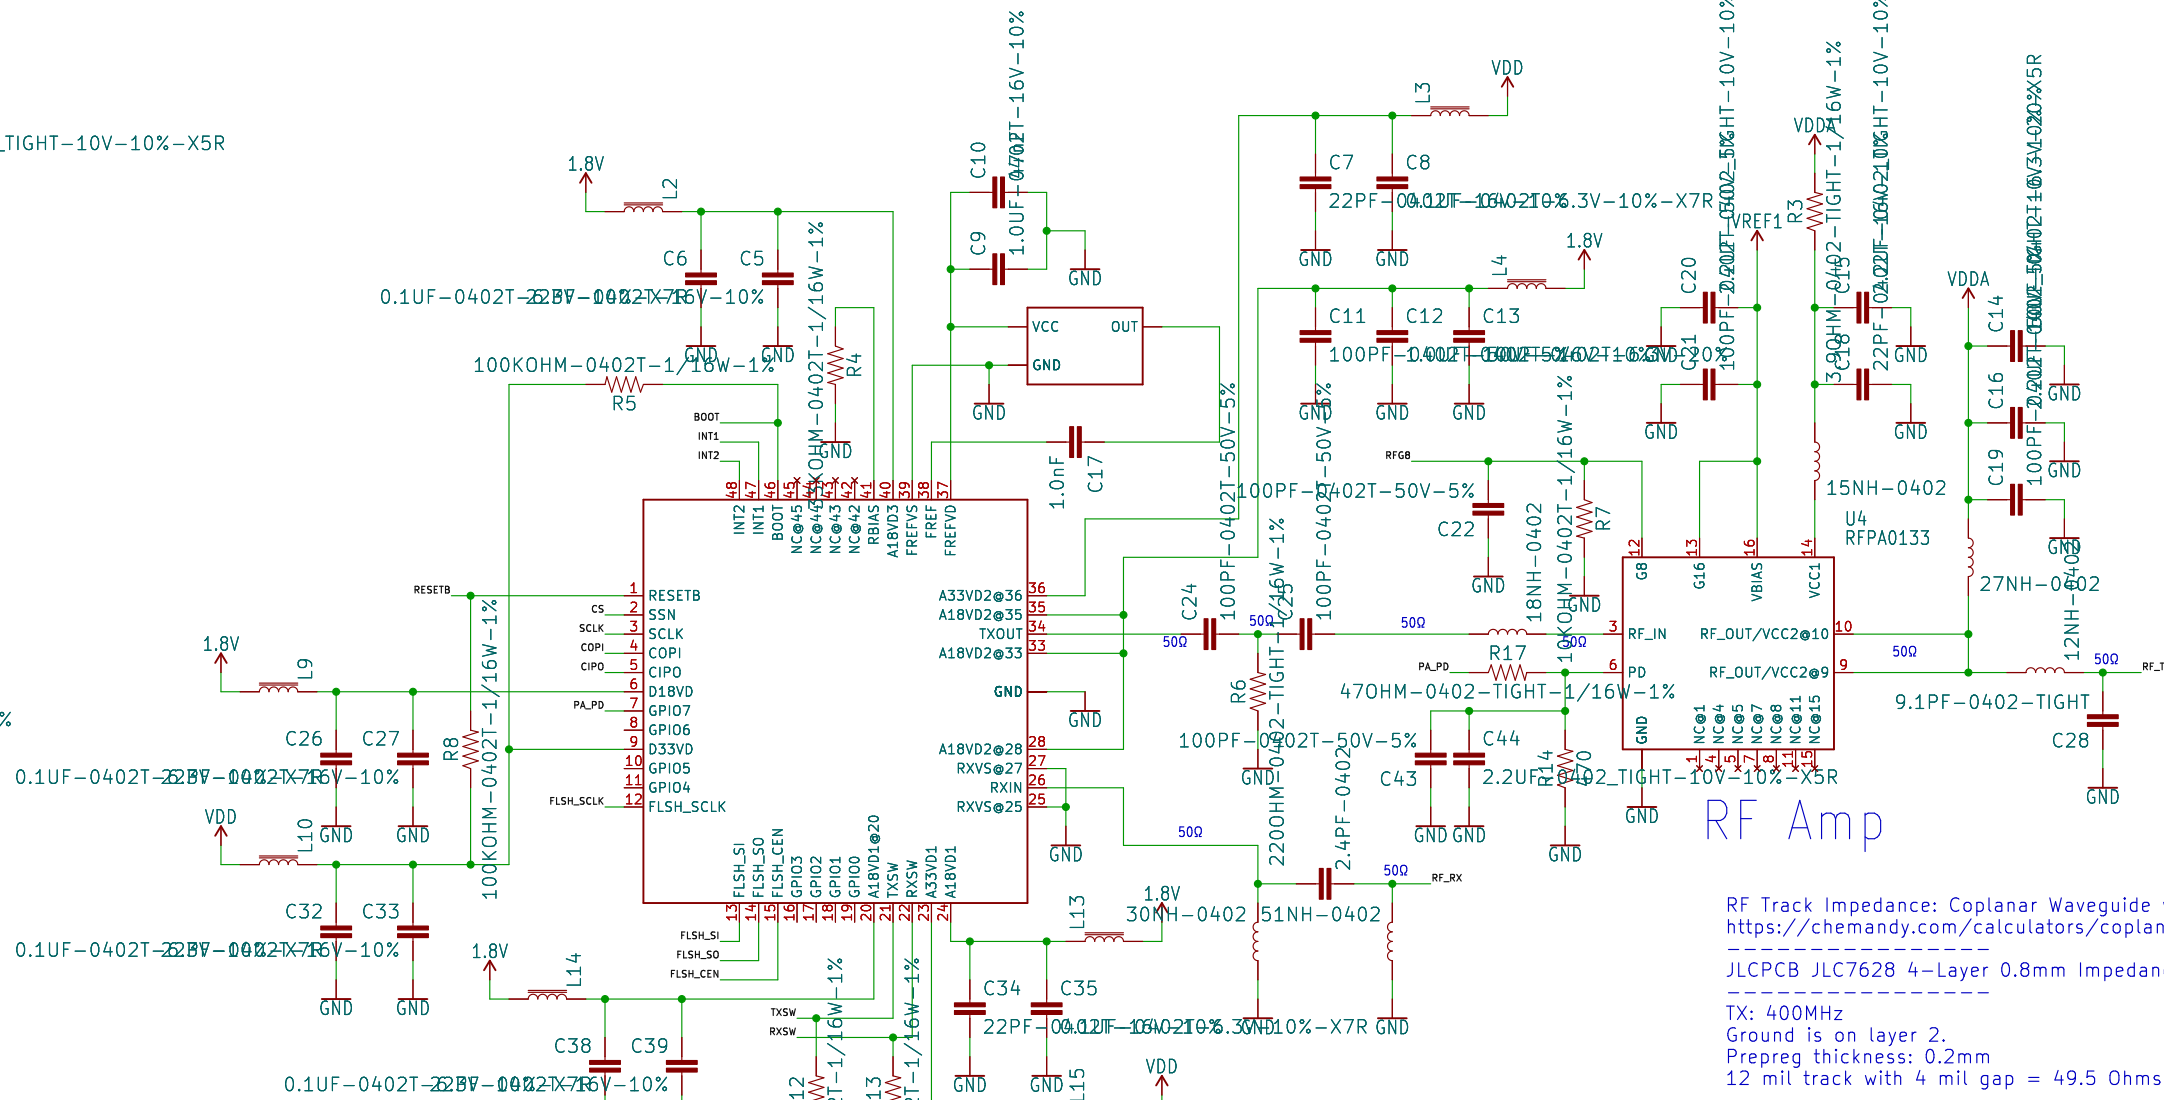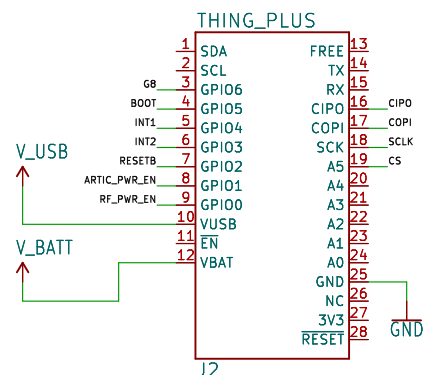

ARTIC R2

RF Track Impedance: Coplanar Waveguide with Ground Calculations
<https://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm>

JLPCB JLC7628 4-Layer 0.8mm Impedance Control Stackup (Er = 4.6)

TX: 400MHz
Ground is on layer 2.
Prepreg thickness: 0.2mm
12 mil track with 4 mil gap = 49.5 Ohms

RX: 466MHz
Ground is on layer 15 (there is a cut-out on layer 2 as per AnSem's design guide).
Prepreg (0.2) + layer 2 (0.0175) + core thickness (0.265) = 0.4825mm
20 mil track with 4 mil gap = 49.9 Ohms

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: PS\${DESIGNER}
Based on the Icoteg Reference Design

REV: \${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User
KiCad E.D.A. eeschema 7.0.6

Rev: 1/1