


PIR and NCS36000 Amplifier

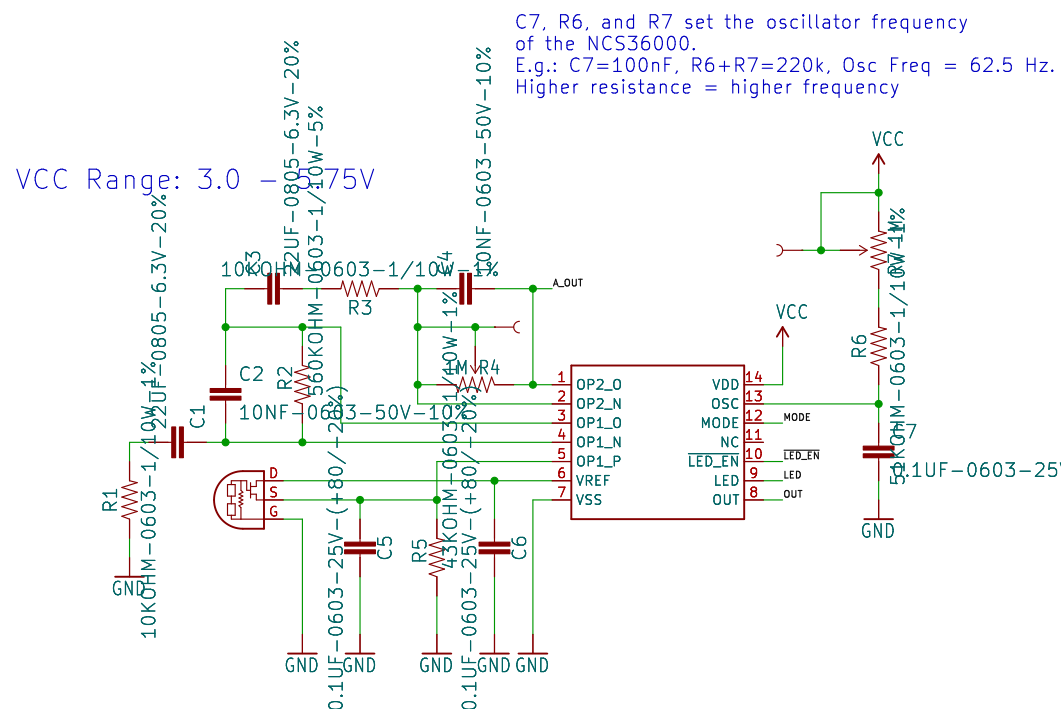



Lens

PIR Lens


ZCWM05GIV1 – Ceiling mount array 360° oval or wall mount array 100°, 8m range.
Wall or ceiling mount for medium room



Connectors

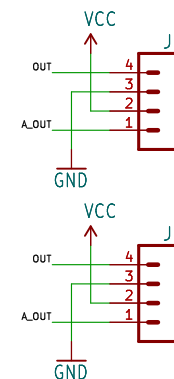

Single/Dual Pulse Mode Select




MODE selects the pulse-count mode.
* Single-pulse (MODE=LOW): OUT will trigger if either comparator toggles and deglitch time is appropriate length.
* Dual-pulse (MODE=Vdd): Requires two pulses – one from each comparator – within 312 clock cycles.

LED Activity Indicator



The LED_EN pin enables the LED output when motion has been detected. It's active-low. During start-up the LED will toggle regardless of LED_EN's state.



Released under the Creative Commons

Attribution Share-Alike 4.0 License

<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: Jim Lindblom

REV: v1.0

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date: KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev: Id: 1/1