



Connectors

VIN: 4.1 – 22V


VDD (optional): 3.0 – 5.5V

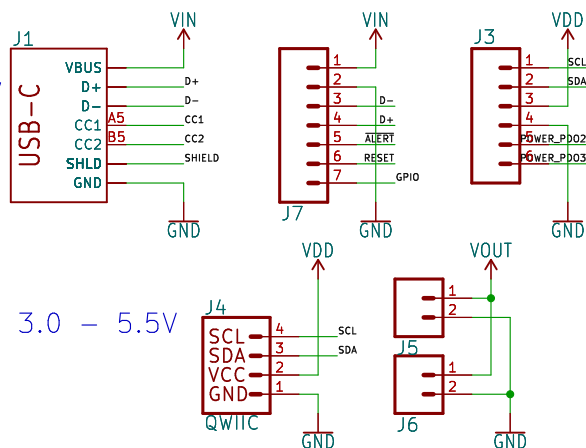

STUSB4500

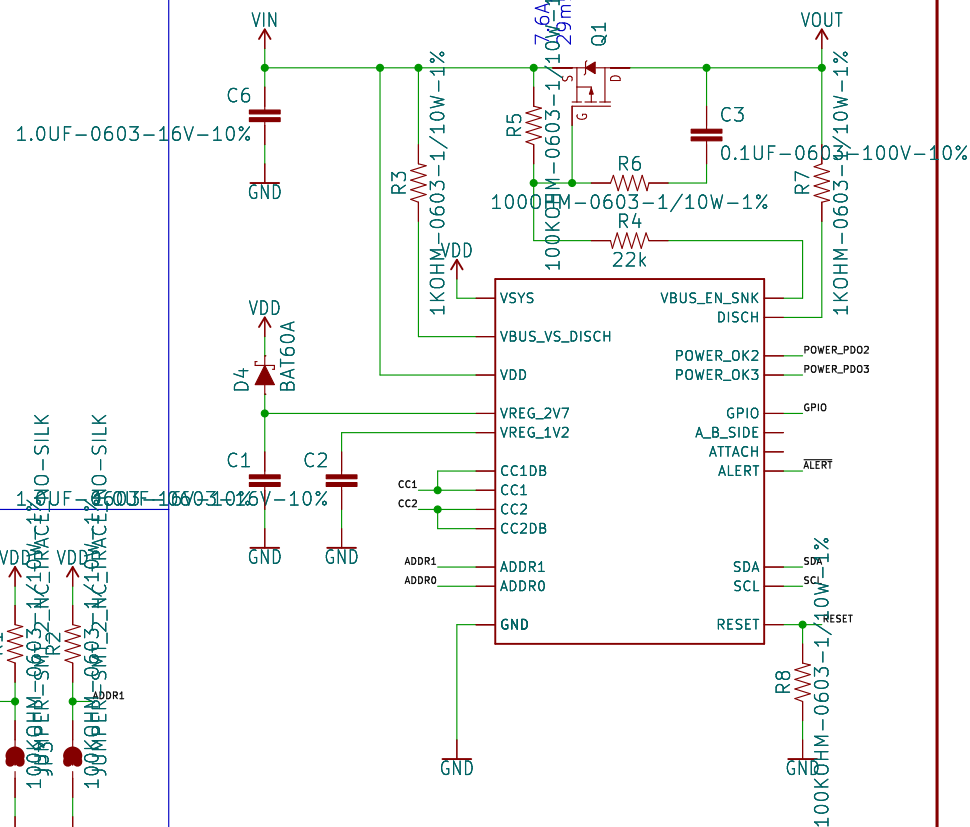


ESD Protection




I2C Address Jumpers

ADDR0 and ADDR1 sets I2C address:
 ADDR0 | ADDR1 | Address
 0 | 0 | 0x28*
 0 | 1 | 0x29
 1 | 0 | 0x2A
 1 | 1 | 0x2B
 * Default Address
 0: Jumper Closed
 1: Jumper Open

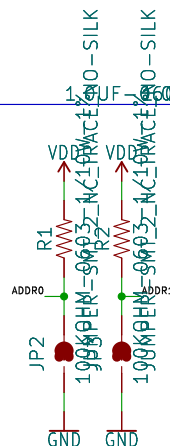


LEDs



Reset Switch



I2C Pull-Up



Released under the Creative Commons
 Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Alex DESIGNER

REV:
 >REV

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Sheet: /
 File: working.kicad_sch

Title:

Size: User Date:
 KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1

Rev:
 Id: 1/1