




Power Switching & Inrush Current Limit

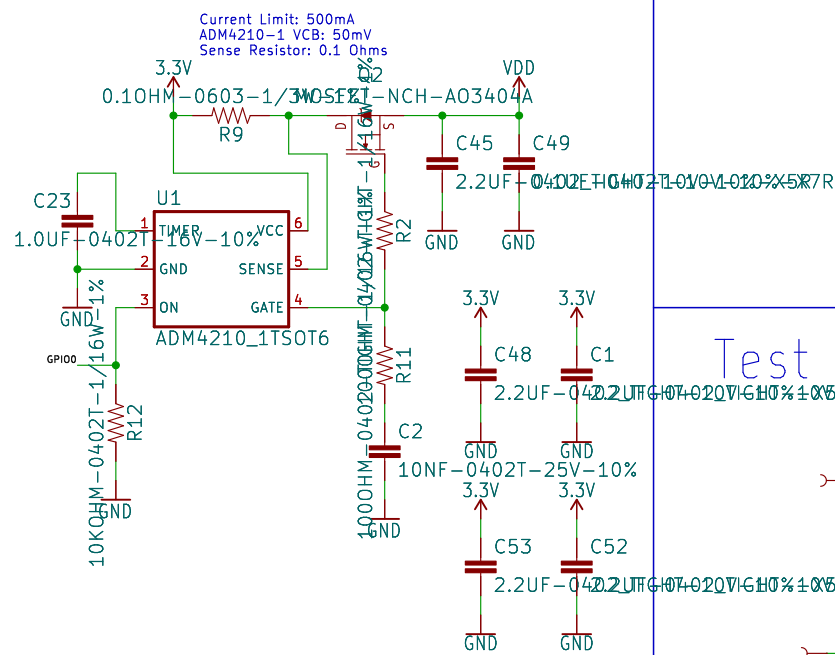


Voltage Regulation

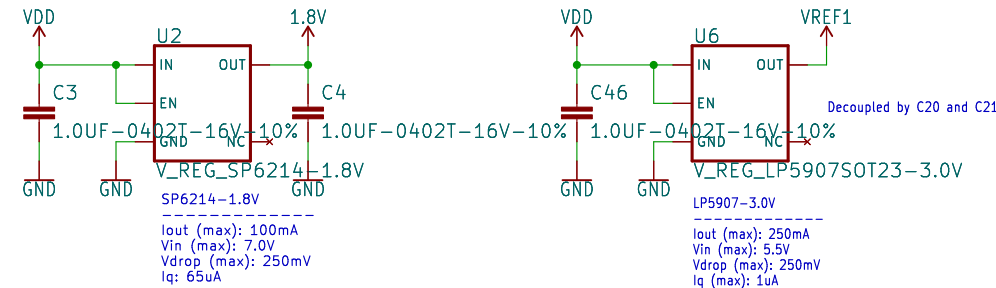


Antenna Switch

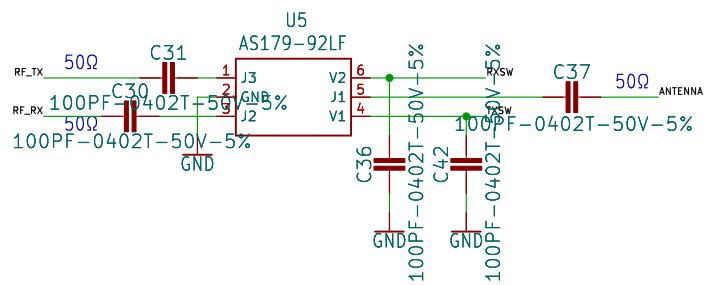


Antenna




Test Points




FLASH Memory

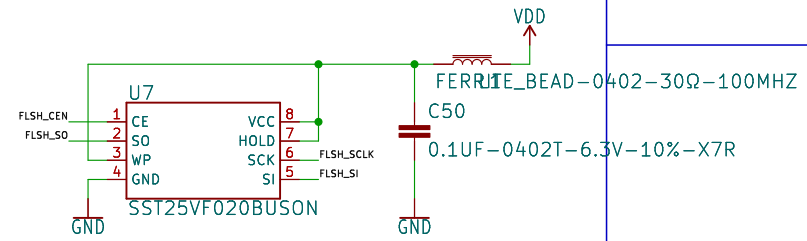


Gain Opto-Isolation

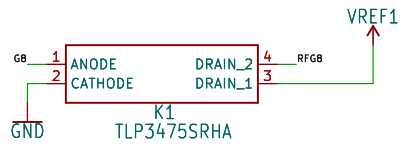


smol Connectors

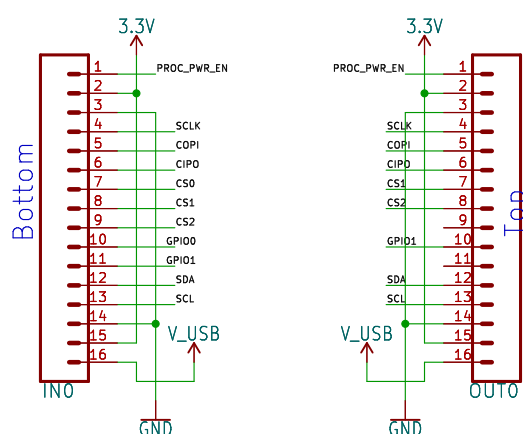

I2C GPIO

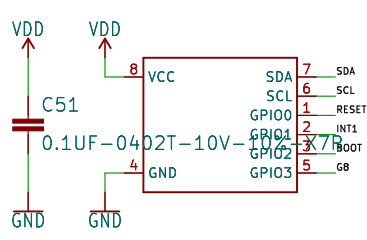

ARTIC R2

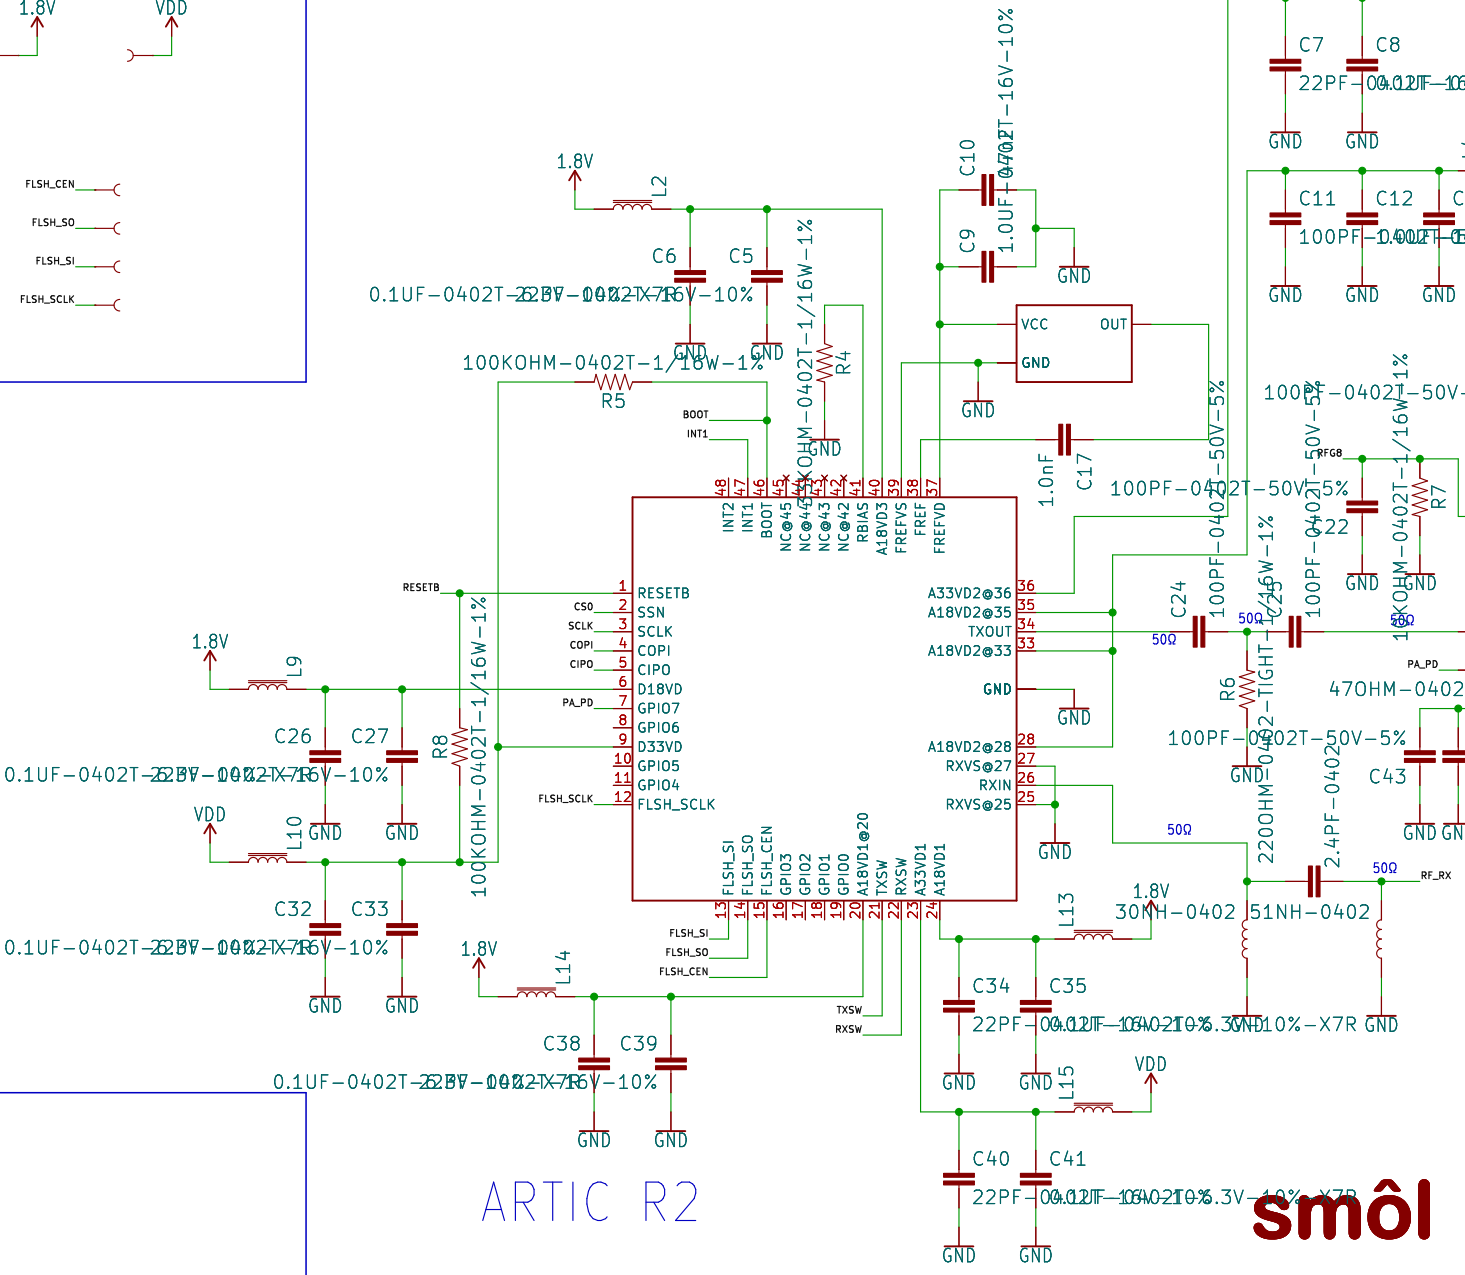

RF Amp

RF Track Impedance: Coplanar Waveguide with Ground Calculations
<https://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm>
JLPCB JLC7628 4-Layer 0.8mm Impedance Control Stackup (Er = 4.6)
TX: 400MHz
Ground is on layer 2.
Prepreg thickness: 0.2mm
12 mil track with 4 mil gap = 49.5 Ohms
RX: 466MHz
Ground is on layer 15 (there is a cut-out on layer 2 as per AnSem's design guide).
Prepreg (0.2) + layer 2 (0.0175) + core thickness (0.265) = 0.4825mm
20 mil track with 4 mil gap = 49.9 Ohms

smol



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		Special Instructions	
TITLE: \${PROJECTNAME}		REV: >REV	
Design by: P. DESIGNER		REV: >REV	
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}	
Size: User		Rev: Id: 1/1	
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1			