


Components are selected for operation in the 902–928 MHz band. See README.md for other options.

TX path (filter, no amplification) switched on when power is not applied

Power with 3.3 V DC on P1A.

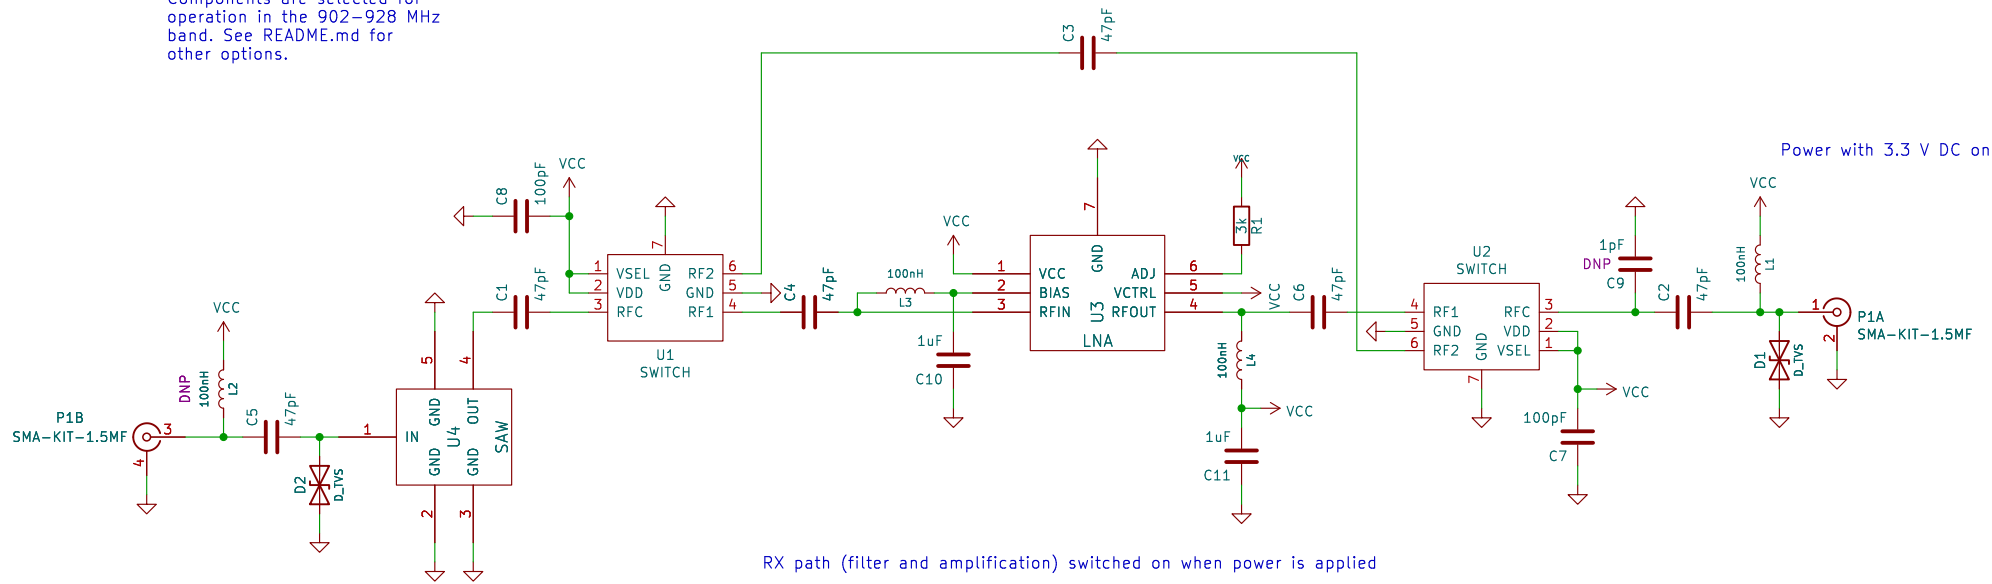

RX path (filter and amplification) switched on when power is applied

L2 unpopulated: DC is blocked on port P1B. Board is powered by P1A.

L2 populated: DC is passed through. Board can be powered by P1A or P1B.



Licensed under the CERN-OHL-P v2

Copyright (c) 2014–2020 Great Scott Gadgets <info@greatscottgadgets.com>

Sheet: /

File: working.kicad_sch

Title: LNA1109

Size: A4 Date: 2020-08-05

KiCad E.D.A. eeschema 7.0.6

Rev:

Id: 1/1