


SENSORS
Up to four external sensors powered by 3.3V can be connected through 3.5mm audio jacks.
The power supply to the sensors is controlled by the Arduino to conserve power and minimize electrolytic damage to moisture sensors.
The idea is to probe the sensors only at pre-programmed intervals.
There is a temperature sensor on board to allow following the temperature. This might be particularly useful to turn-off watering or draining the pipes during frosts.

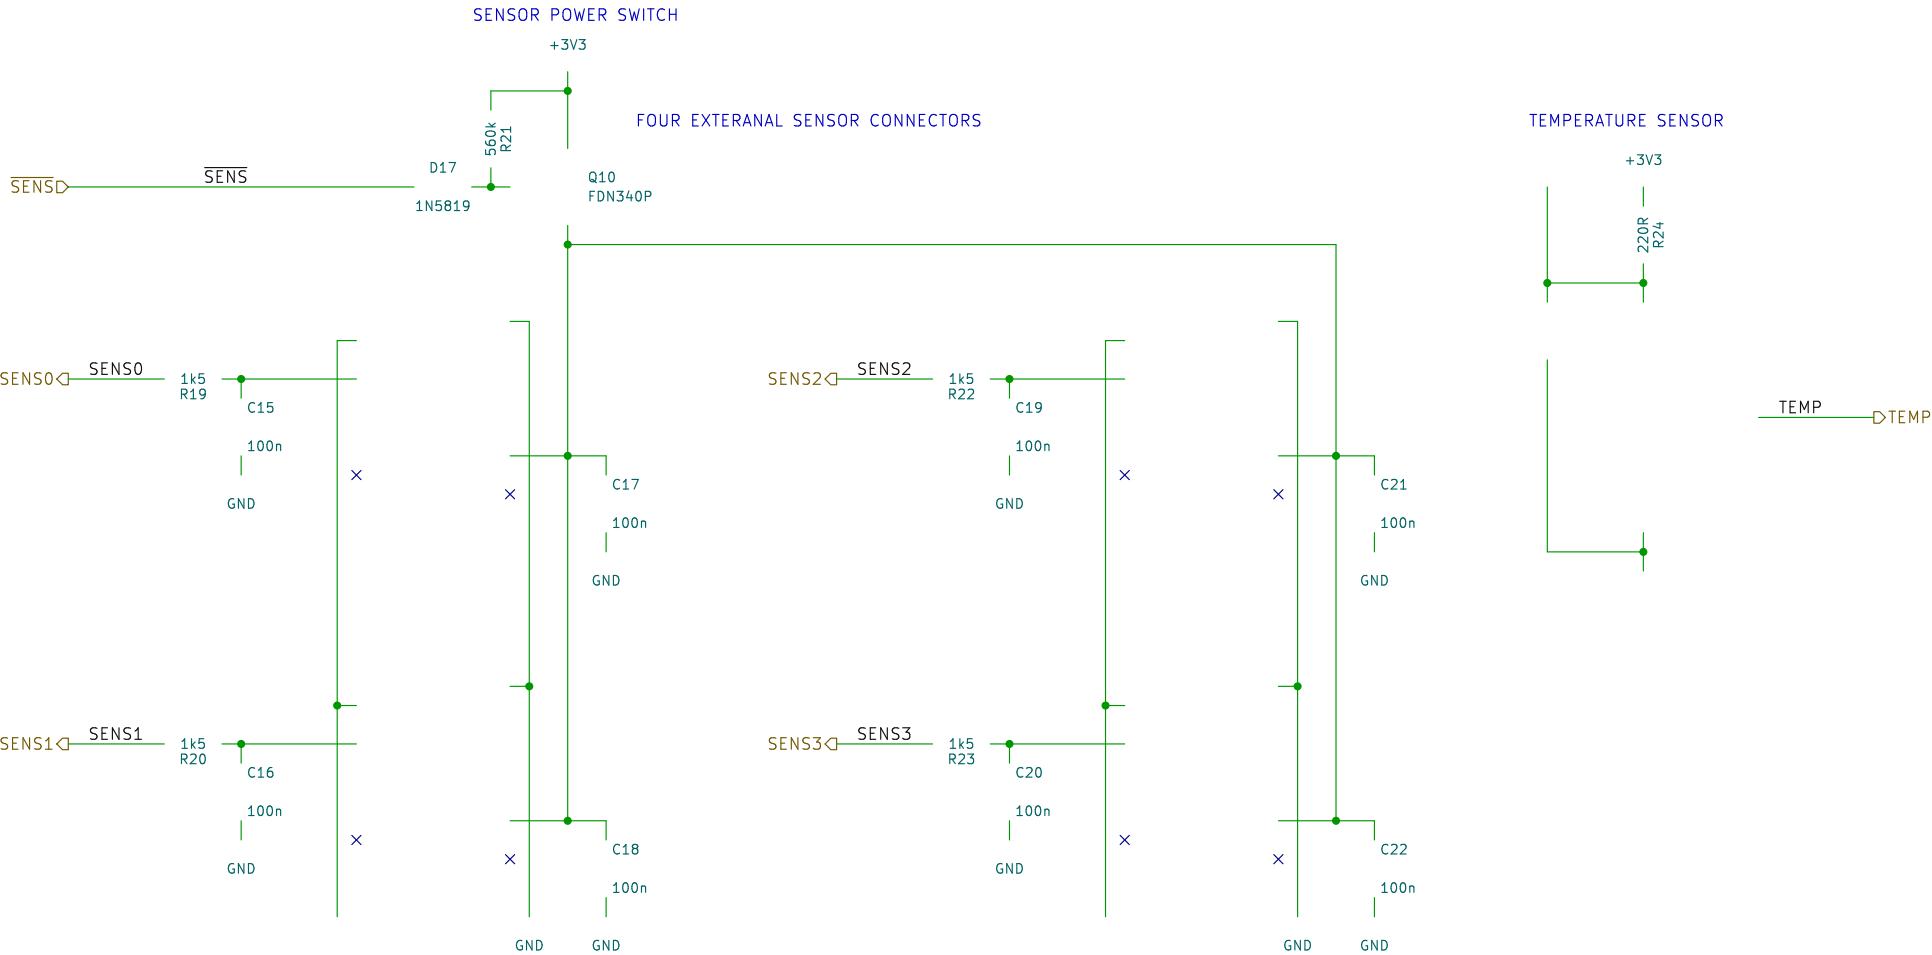

License: CC-BY-SA
Jakub Nedbal
Serious Play Ltd

Sheet: /
File: working.kicad_sch

Title: Guarduino Control Unit

Size: A4 Date: 2016-09-30

KiCad E.D.A. eeschema 7.0.6

Rev: 1.0

Id: 1/1