

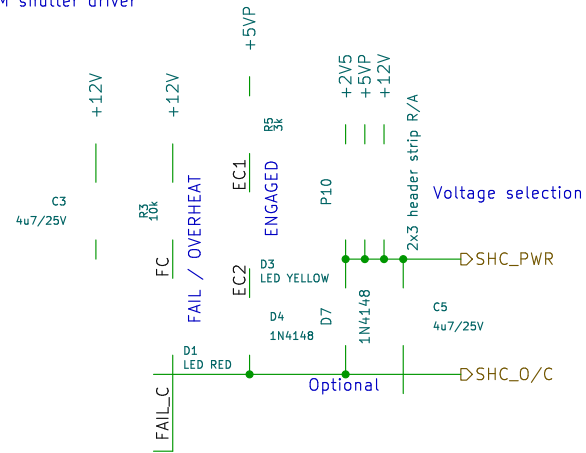
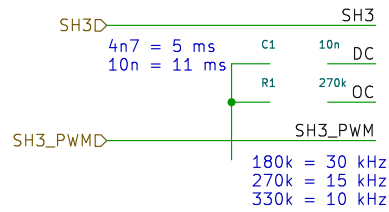


Dual open collector PWM shutter driver

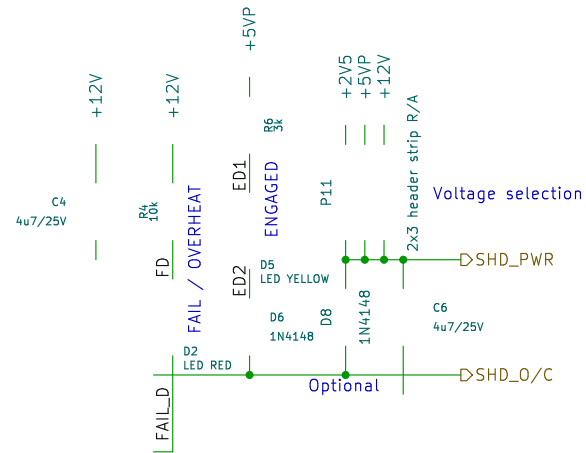

Optional coil bounce supression diodes D5 and D6:
Do not connect for fast shutter operation
Connect for higher circuit reliability

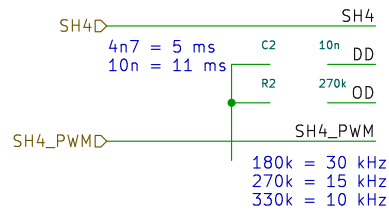

King's College London

Sheet: /
File: working.kicad_sch

Title: Flow Unit Shield

Size: A4 Date: 19 Jun 2014

KiCad E.D.A. eeschema 7.0.6

Rev: 1.23

Id: 1/1