

Power supply

Layout for $V_{in} < 60V$, $I_{out} < 300mA$, $V_{out} = 5V$


C_{in}: TDK C3225X7R2A225K230AB
C_{out}: Murata GRM21BR60J226ME39L
Inductor: Bourns SRR6038-470Y

5 V

for CAN


3.3 V

for digital circuits

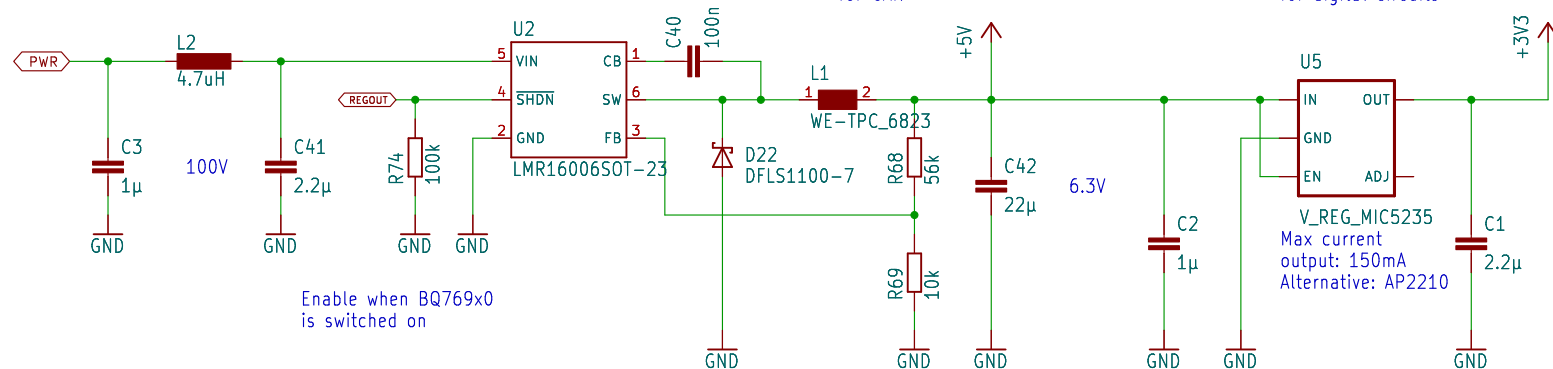


Enable when BQ769x0
is switched on

CAN interface

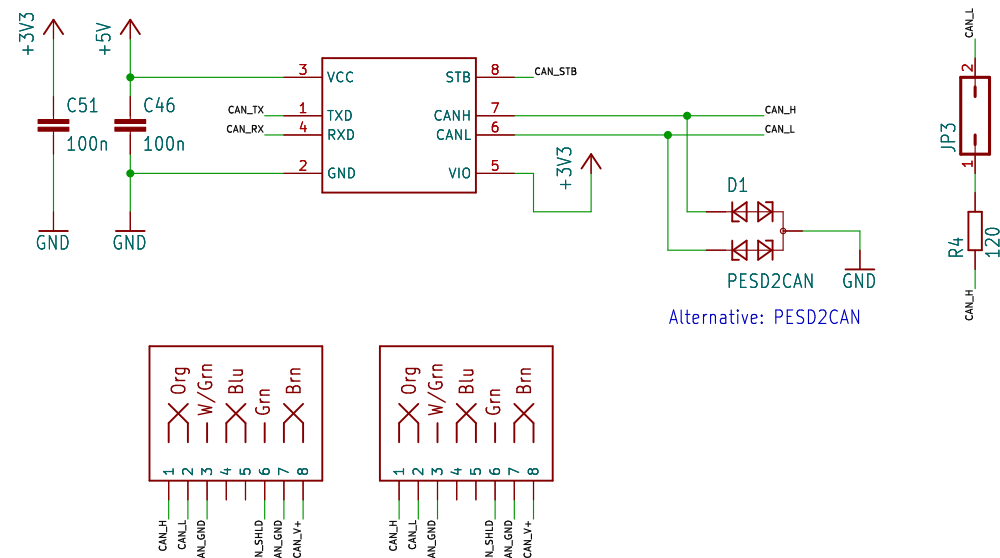


MCU STM32F072

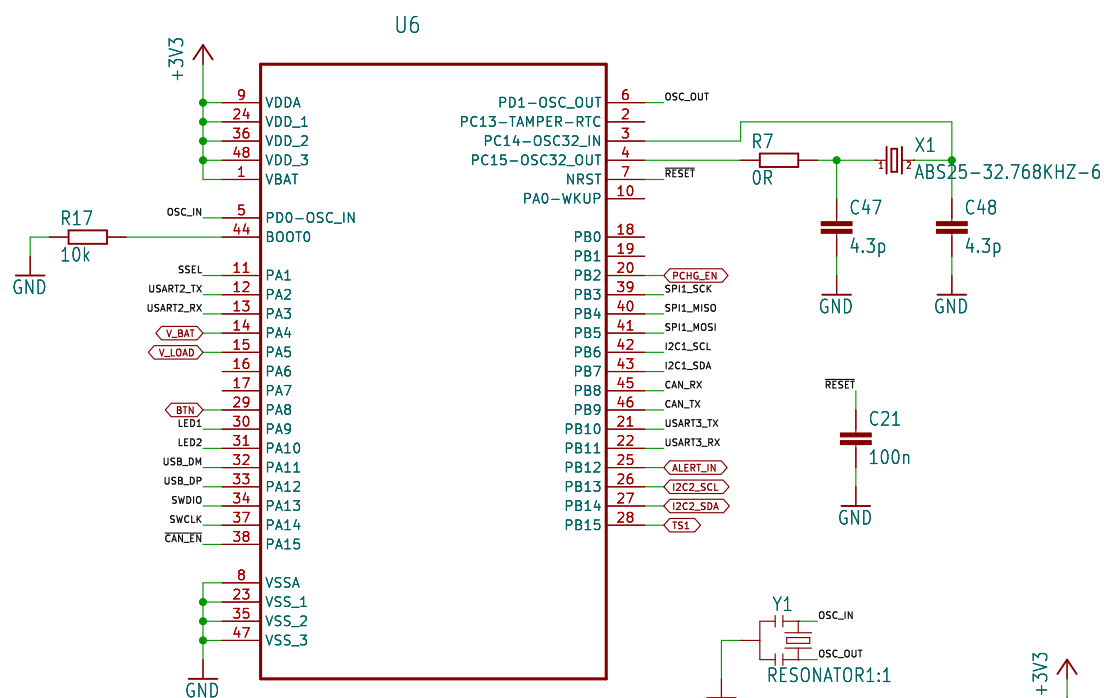



STM32F072CB

Should be 0.1% tolerance
for CAN interface, e.g.
CSTCE8M00G15C99-R0


Cortex SWD

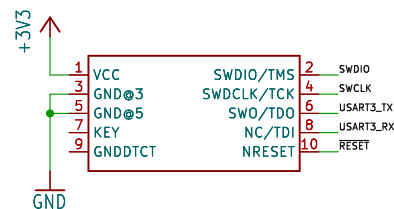


Extension connector

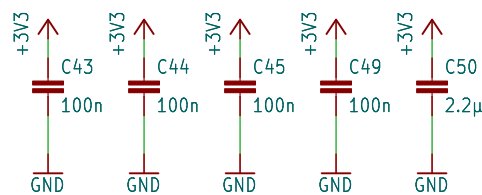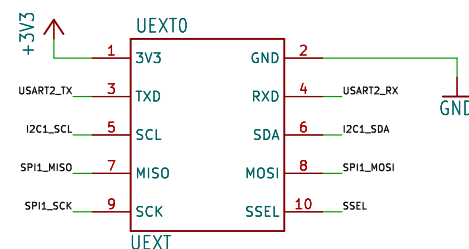


EEPROM

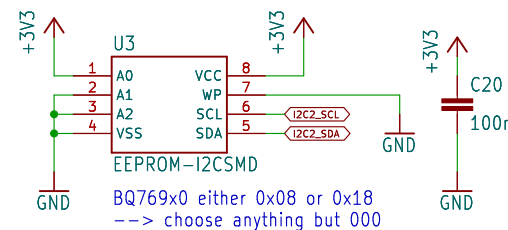

Status LEDs



I2C pull-ups

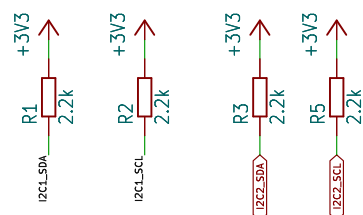

Libre Solar



open hardware

Design: Martin Jäger (<http://libre.solar>)
License: CC-BY-SA

TITLE: \${PROJECTNAME}

Document Number:

REV:

Sheet: /
Date: \${CURRENT-DATE}

Sheet: \${#}/\${##}

Size: User
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1