


Supply rail selection

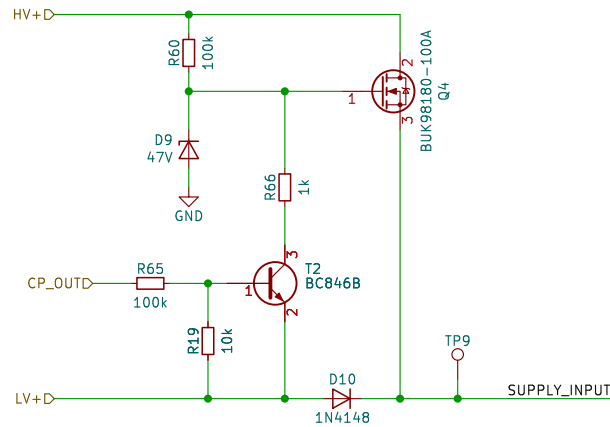


Some applications (e.g. Li-ion batteries) require an internal power supply from the high voltage side (e.g. solar panel input).


The source follower with Q4 limits the supply input below 60V.

T2 selects LV+ as supply to increase efficiency as soon as the charge pump is on.


HV/LV side to 3.3V (SMPS)

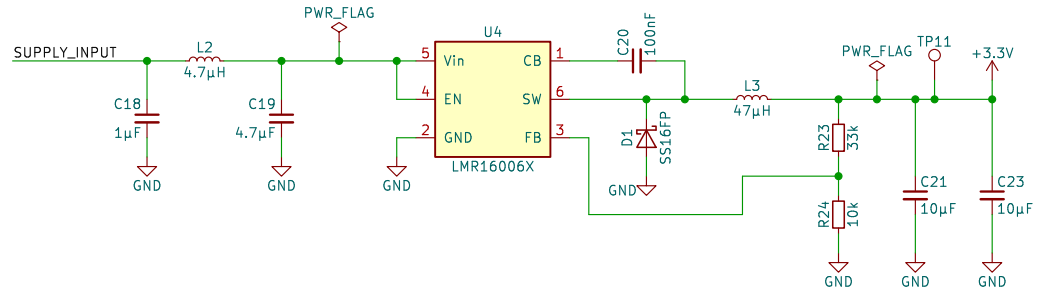

12V MOSFET driver supply voltage (emitter follower)

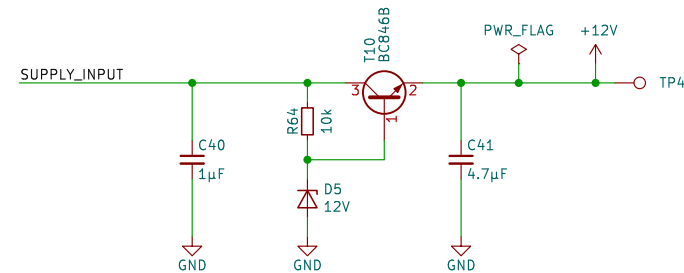

Charge pump

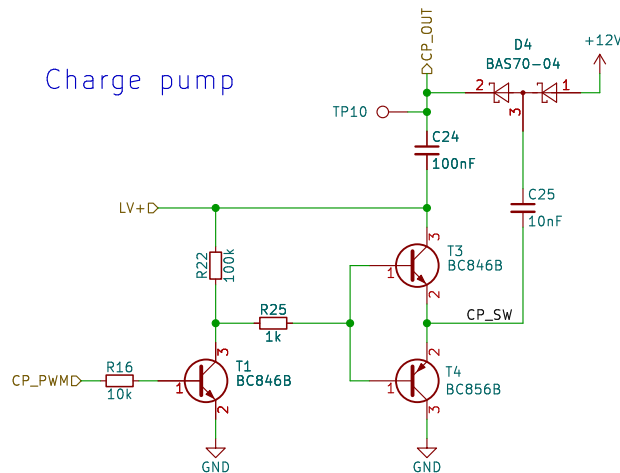

If not stated otherwise, all MLCC 50V X7R

Author: Martin Jäger
Licensed under CERN-OHL-W version 2
Copyright © 2020 Libre Solar Technologies GmbH

Sheet: /
File: working.kicad_sch

Title: MPPT 2420 HC

Size: A4 Date: 2021-01-06

KiCad E.D.A. eeschema 7.0.6

Rev: 0.2.3

Id: 1/1