


HV/LV side to 3.3V (SMPS)

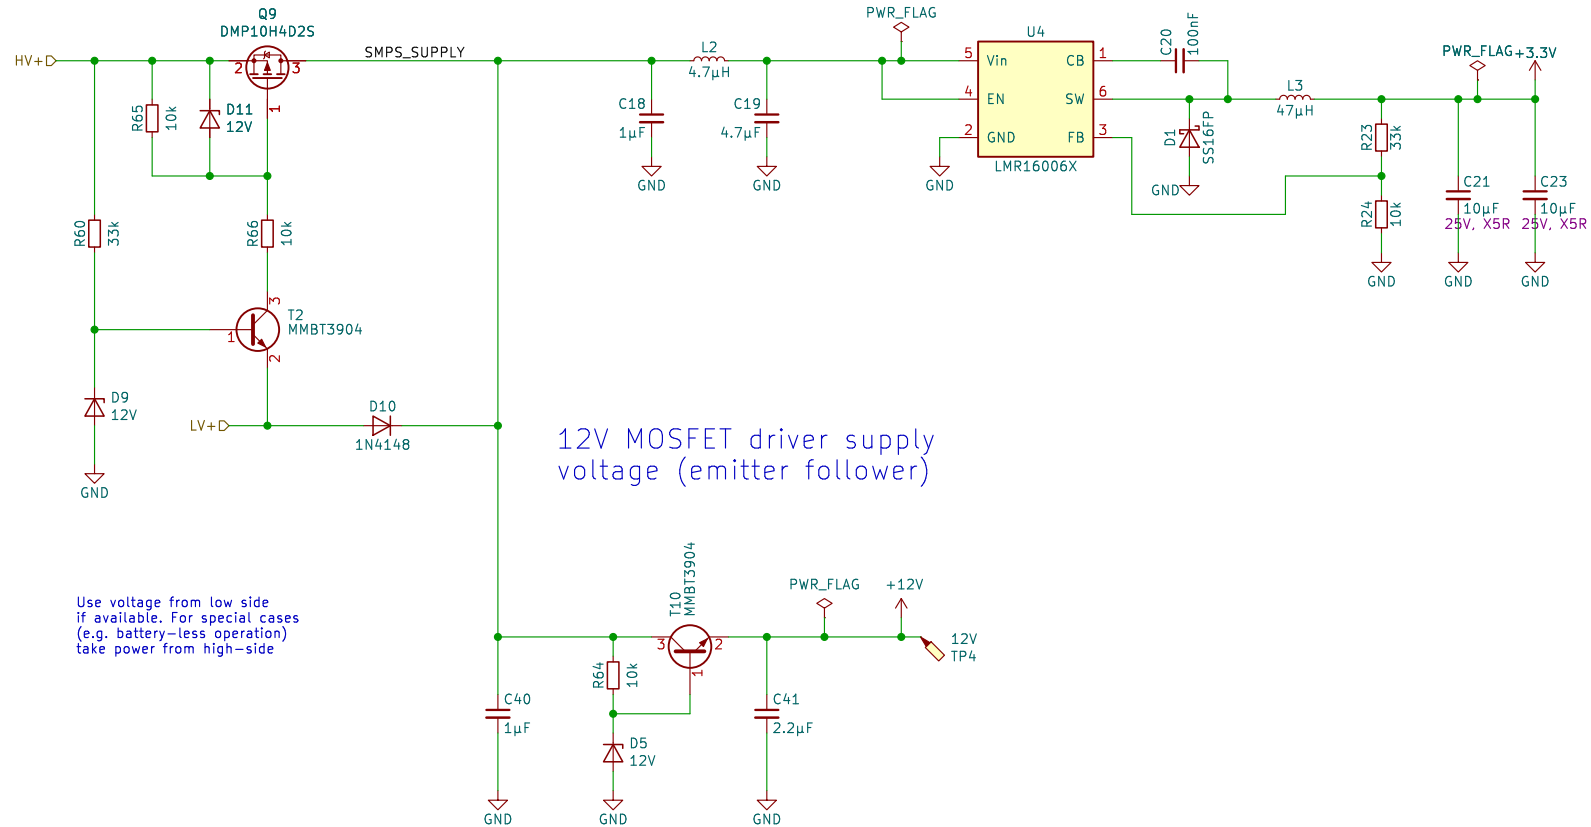

Use voltage from low side if available. For special cases (e.g. battery-less operation) take power from high-side

12V MOSFET driver supply voltage (emitter follower)

If not stated otherwise, all MLCC 50V X7R

Website: <http://libre.solar>

Author: Martin Jäger

Libre Solar Technologies GmbH

Sheet: /

File: working.kicad_sch

Title: MPPT 2420 RC

Size: A4

Date: 2020-05-30

KiCad E.D.A. eeschema 7.0.6

Rev: 0.1.1

Id: 1/1