


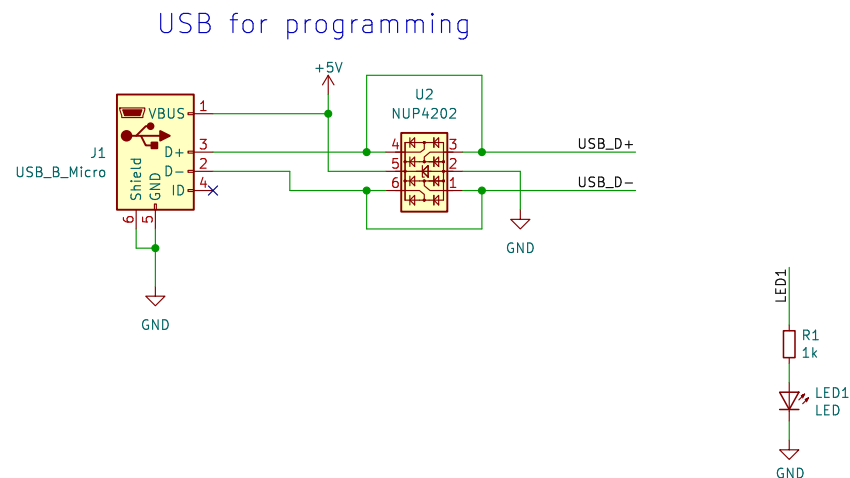


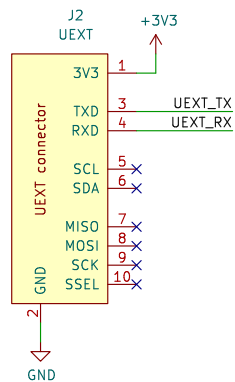

Host MCU
connection

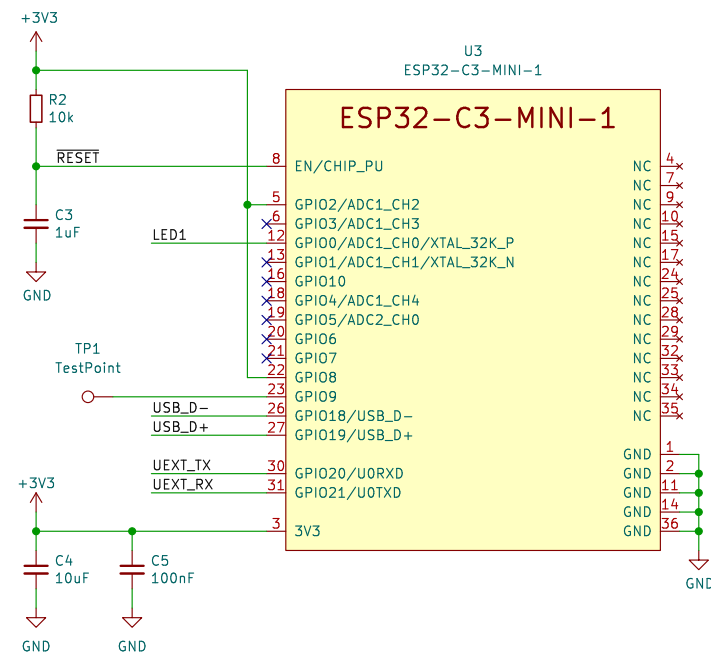

3V3 power supply
during programming

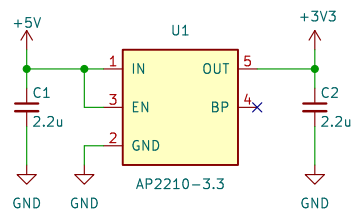

Strapping pins GPIO2 and GPIO8 directly
connected to VCC w/o pull-up resistor
as we don't need to use pins for I/O.

GPIO9 can be used to enter bootloader
mode to un-brick a board.



License: Creative Commons Attribution-ShareAlike 4.0 International
Author: Martin Jäger
Website: <https://libre.solar>
Libre Solar Technologies GmbH

Sheet: /
File: working.kicad_sch

Title: ESP32-C3 to UEXT Adapter

Size: A4 Date: 2023-01-02

KiCad E.D.A. eeschema 7.0.6

Rev: 0.1

Id: 1/1