



POWER


Assuming that the power supplied to the header is from a regulated 5V powersource.



SERVOES & STARTMODULE

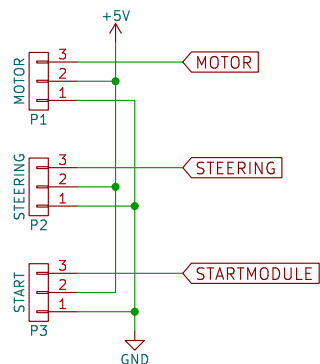


LEDS

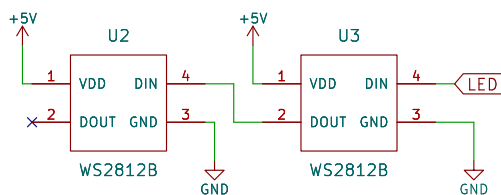


TEENSY

(Either Teensy 3.1 or 3.2)

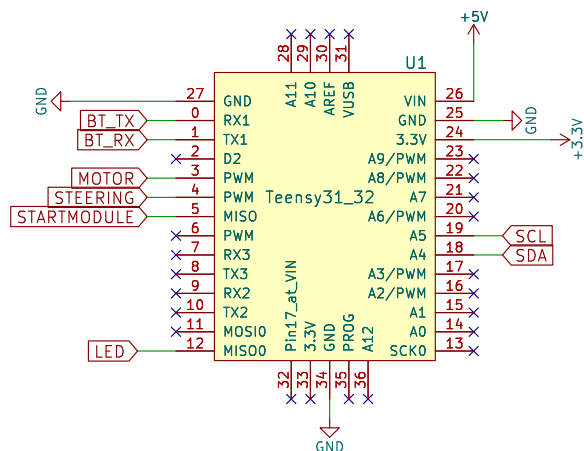


BLUETOOTH

(Optional Bluetooth device. For debugging.)




ACCELEROMETER



SENSORS

5pcs Sharp IR GP2Y0E02B sensors.
Measures range from 4 cm to 50 cm.
Connected to board using JST-PH 4-way connectors. (TODO)
All sensors have same I2C address, so we use switch to mux between them.

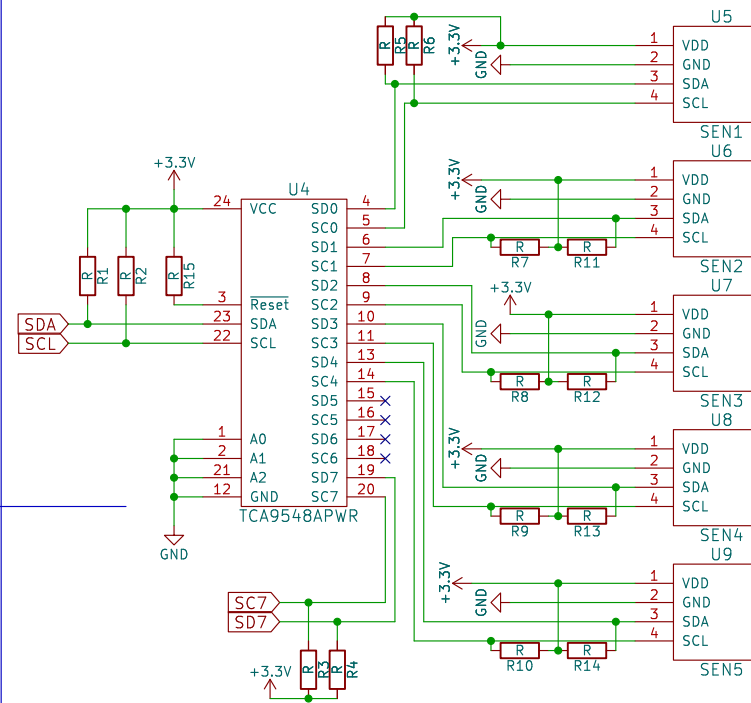

NorBot (Frode Lillerud)

Sheet: /

File: working.kicad_sch

Title: Folkrcracer board for Teensy

Size: A4 Date: 2016-01-04

KiCad E.D.A. eeschema 7.0.6

Rev: 1

Id: 1/1