




FTDI Programmer/UART/FIFO

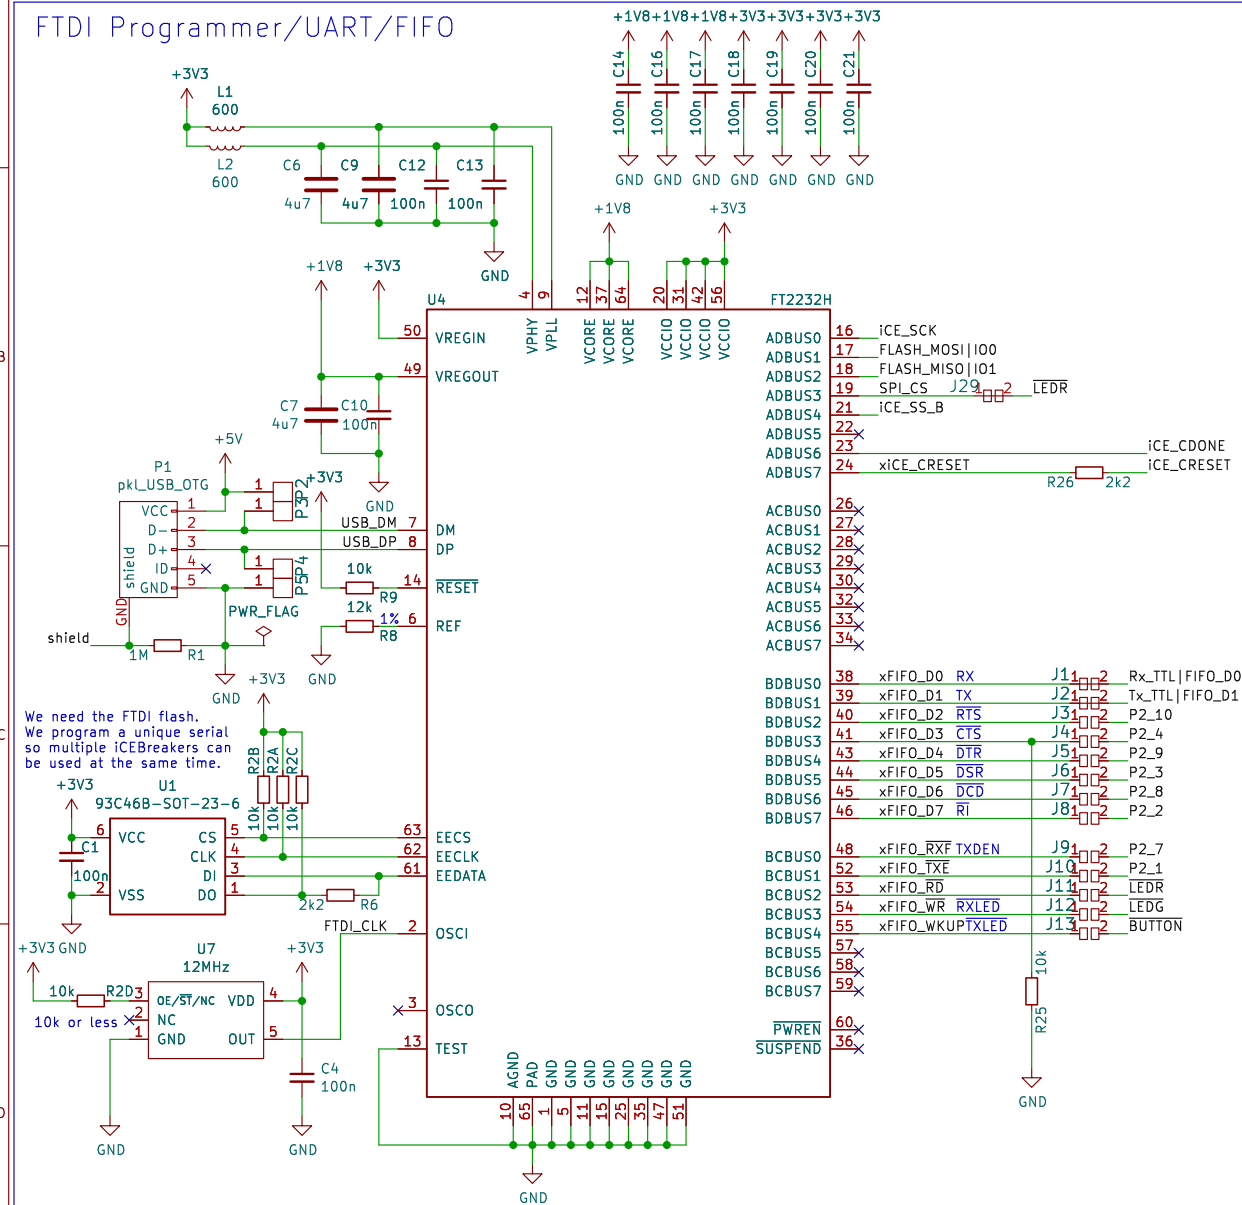


3V3 VReg Device

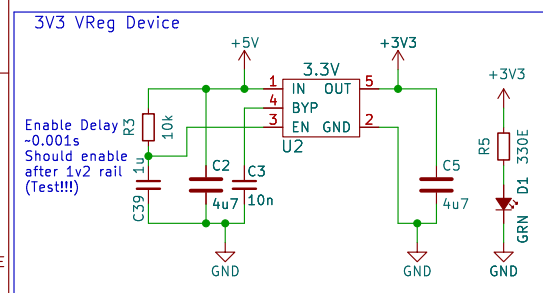


1V2 VReg Device



FPGA

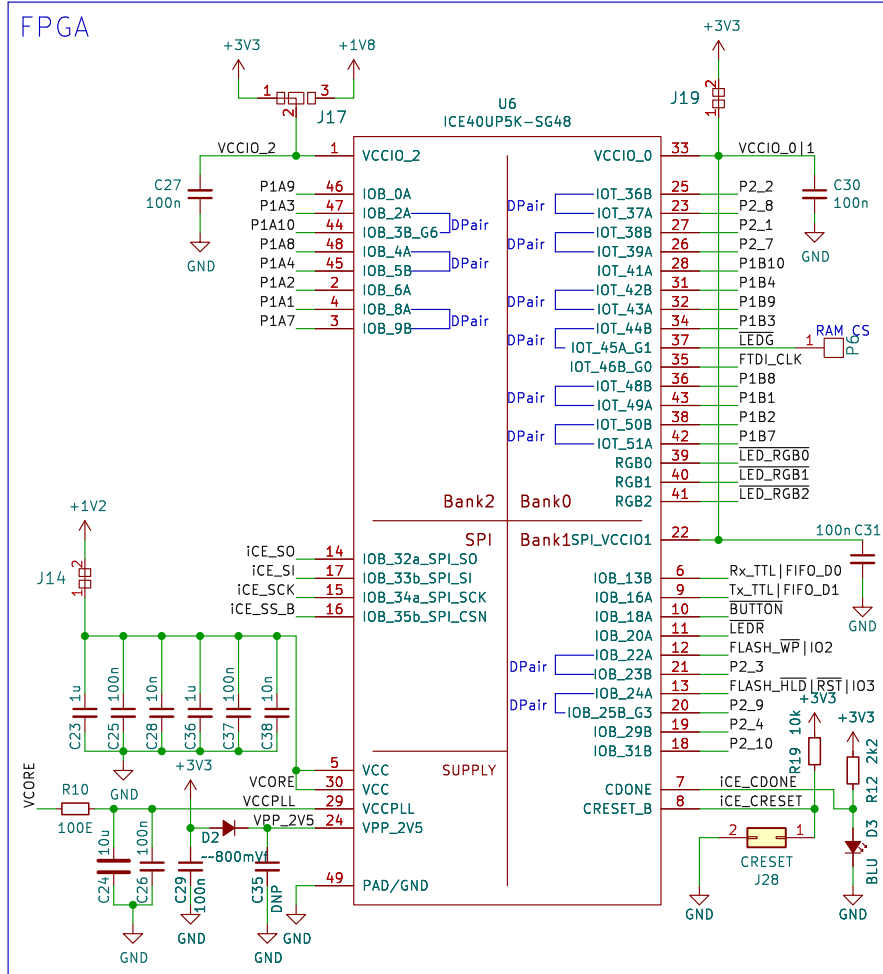

iCE FPGA Flash

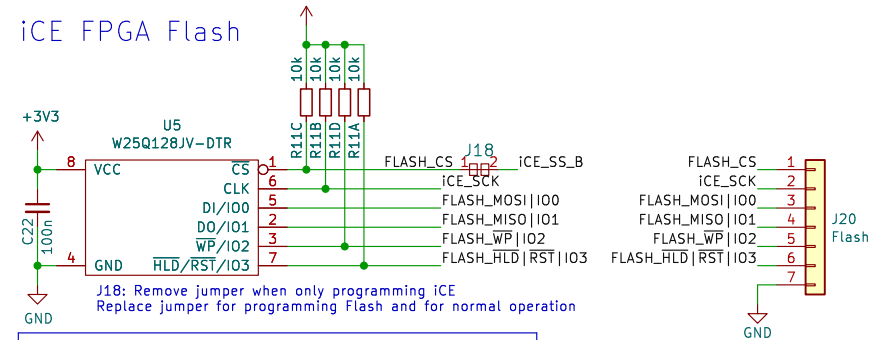


FLASH_MOSI | I00 J15 1□□2 ICE_SO
ICE_SI J16 1□□2 FLASH_MISO | I01

— For programming Flash
|| For programming iCE


For programming iCE cut traces connecting J15 and J16 pads.
Short the pads 1 and 2 together of the J15 and J16 respectively.
For programming Flash reverse the operations.

WS2812 "Ear"

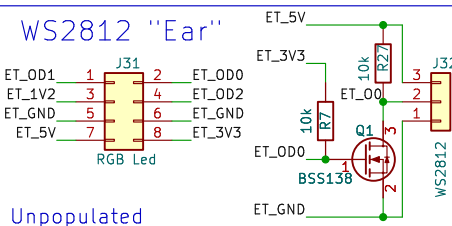


Unpopulated

SAO/I2C "Ear"

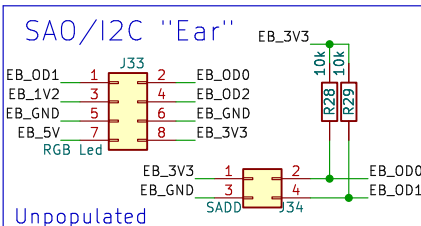


Unpopulated


Dual PMOD

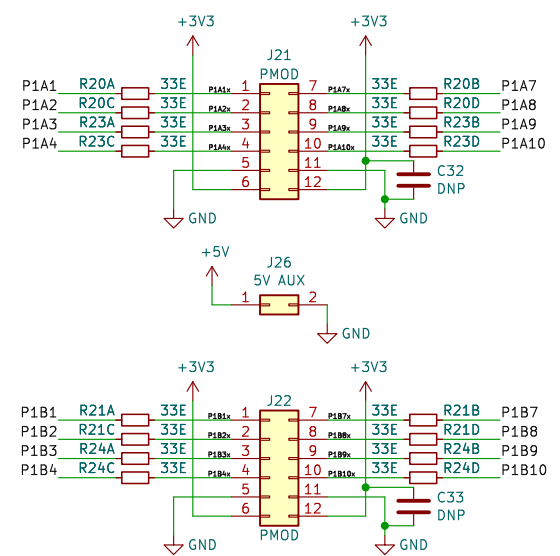


Single PMOD

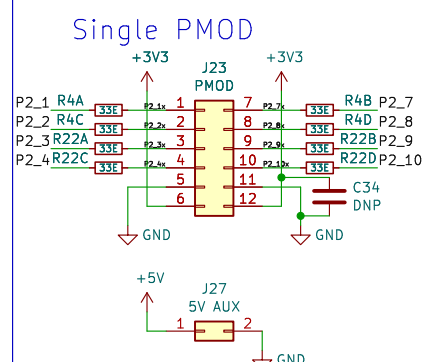


Break Off Section

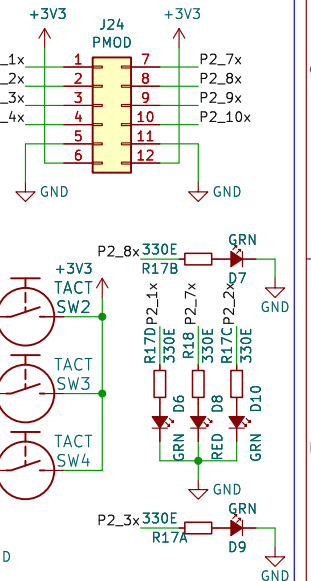

LED/BTN

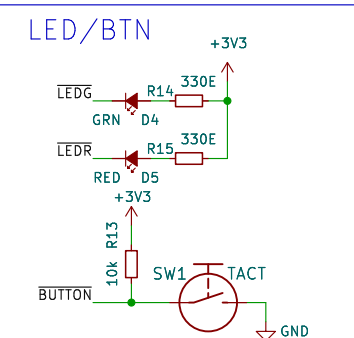

RGB LED

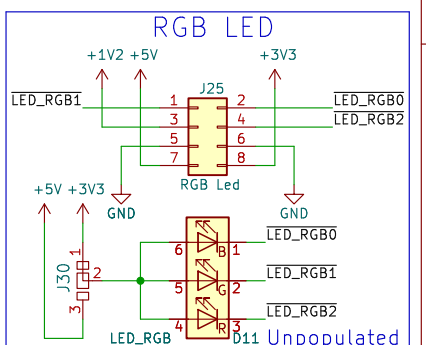

License: CC-BY-SA V4.0
2019 (C) Piotr Esden-Tempski <piotr@esden.net>
2019 (C) 1BitSquared <info@1bitsquared.com>
1BitSquared

Sheet: /
File: working.kicad_sch

Title: iCEBreaker

Size: A3	Date:
----------	-------

KiCad E.D.A. eeschem

Rev: V1.0e

Id: 1/1