USB Connection & Selection

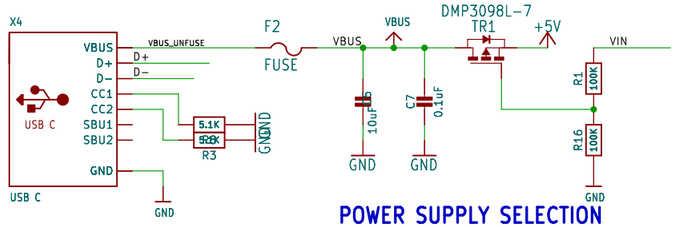

POWER SUPPLY SELECTION

POWER SUPPLY: 5V

Original diode was M7 (1A Si diode)
Replacement is 1A Schottky
Or MOSFET switch

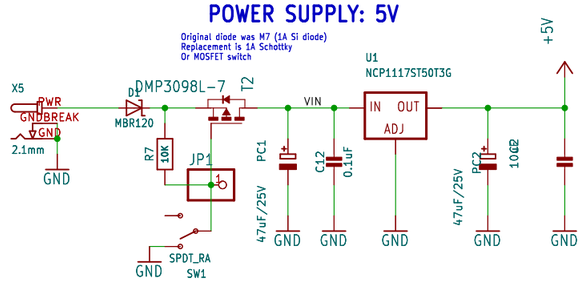

POWER SUPPLY: 3.3V

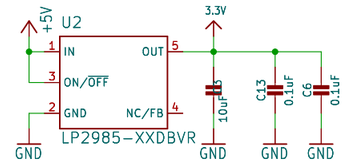

POWER LED



QSPI FLASH



NEOPIXEL LED



D13 LED



Boot thru UART: GPIO10/9 +(8/7)

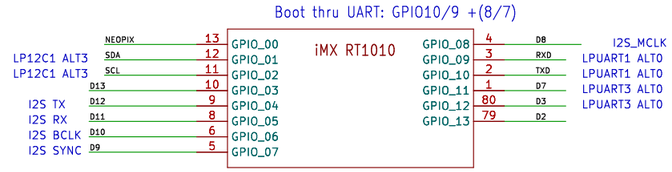

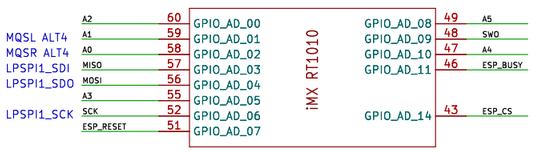

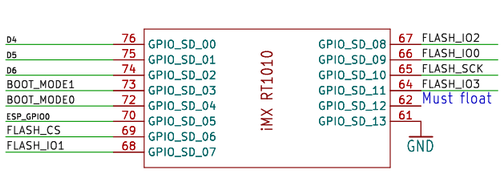

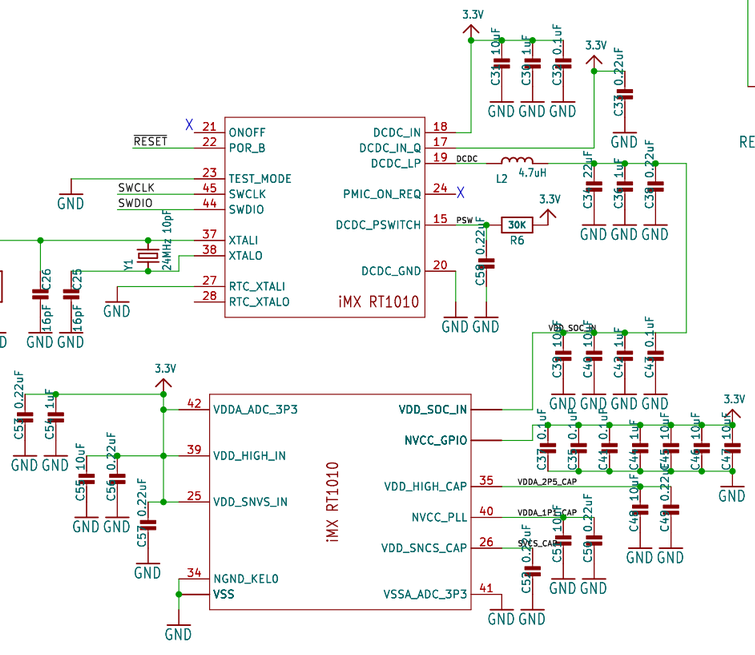

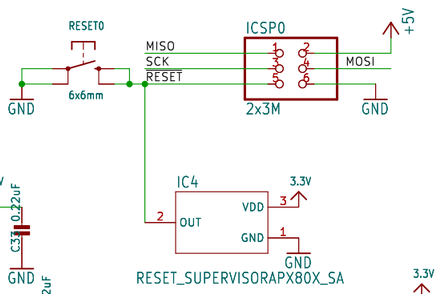



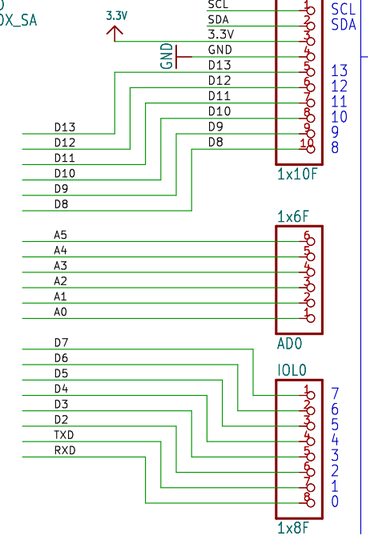

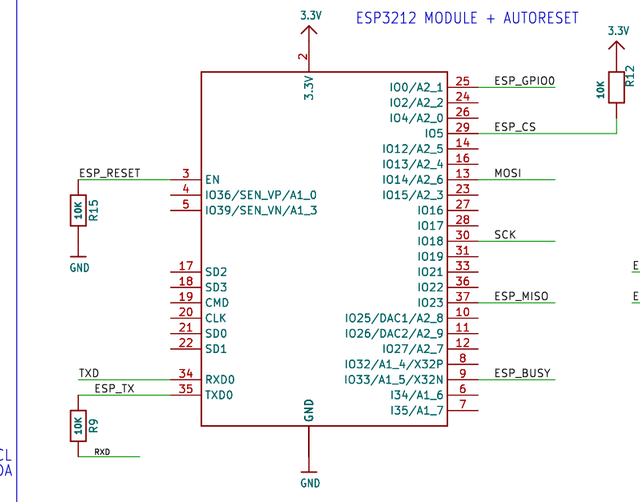

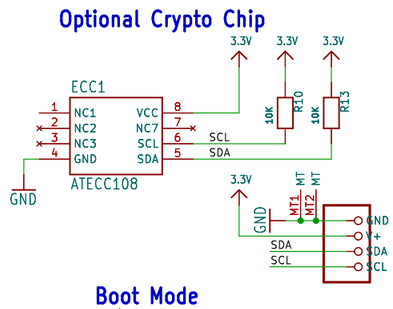





Author:	Limor Fried & Dean M.
${PROJECTNAME}	
${CURRENT_DATE}	
Sheet: ${#}/${##}	
Sheet: /	
File: working.kicad_sch	
Title:	
Size: User	Date:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1	Rev:
	Id: 1/1