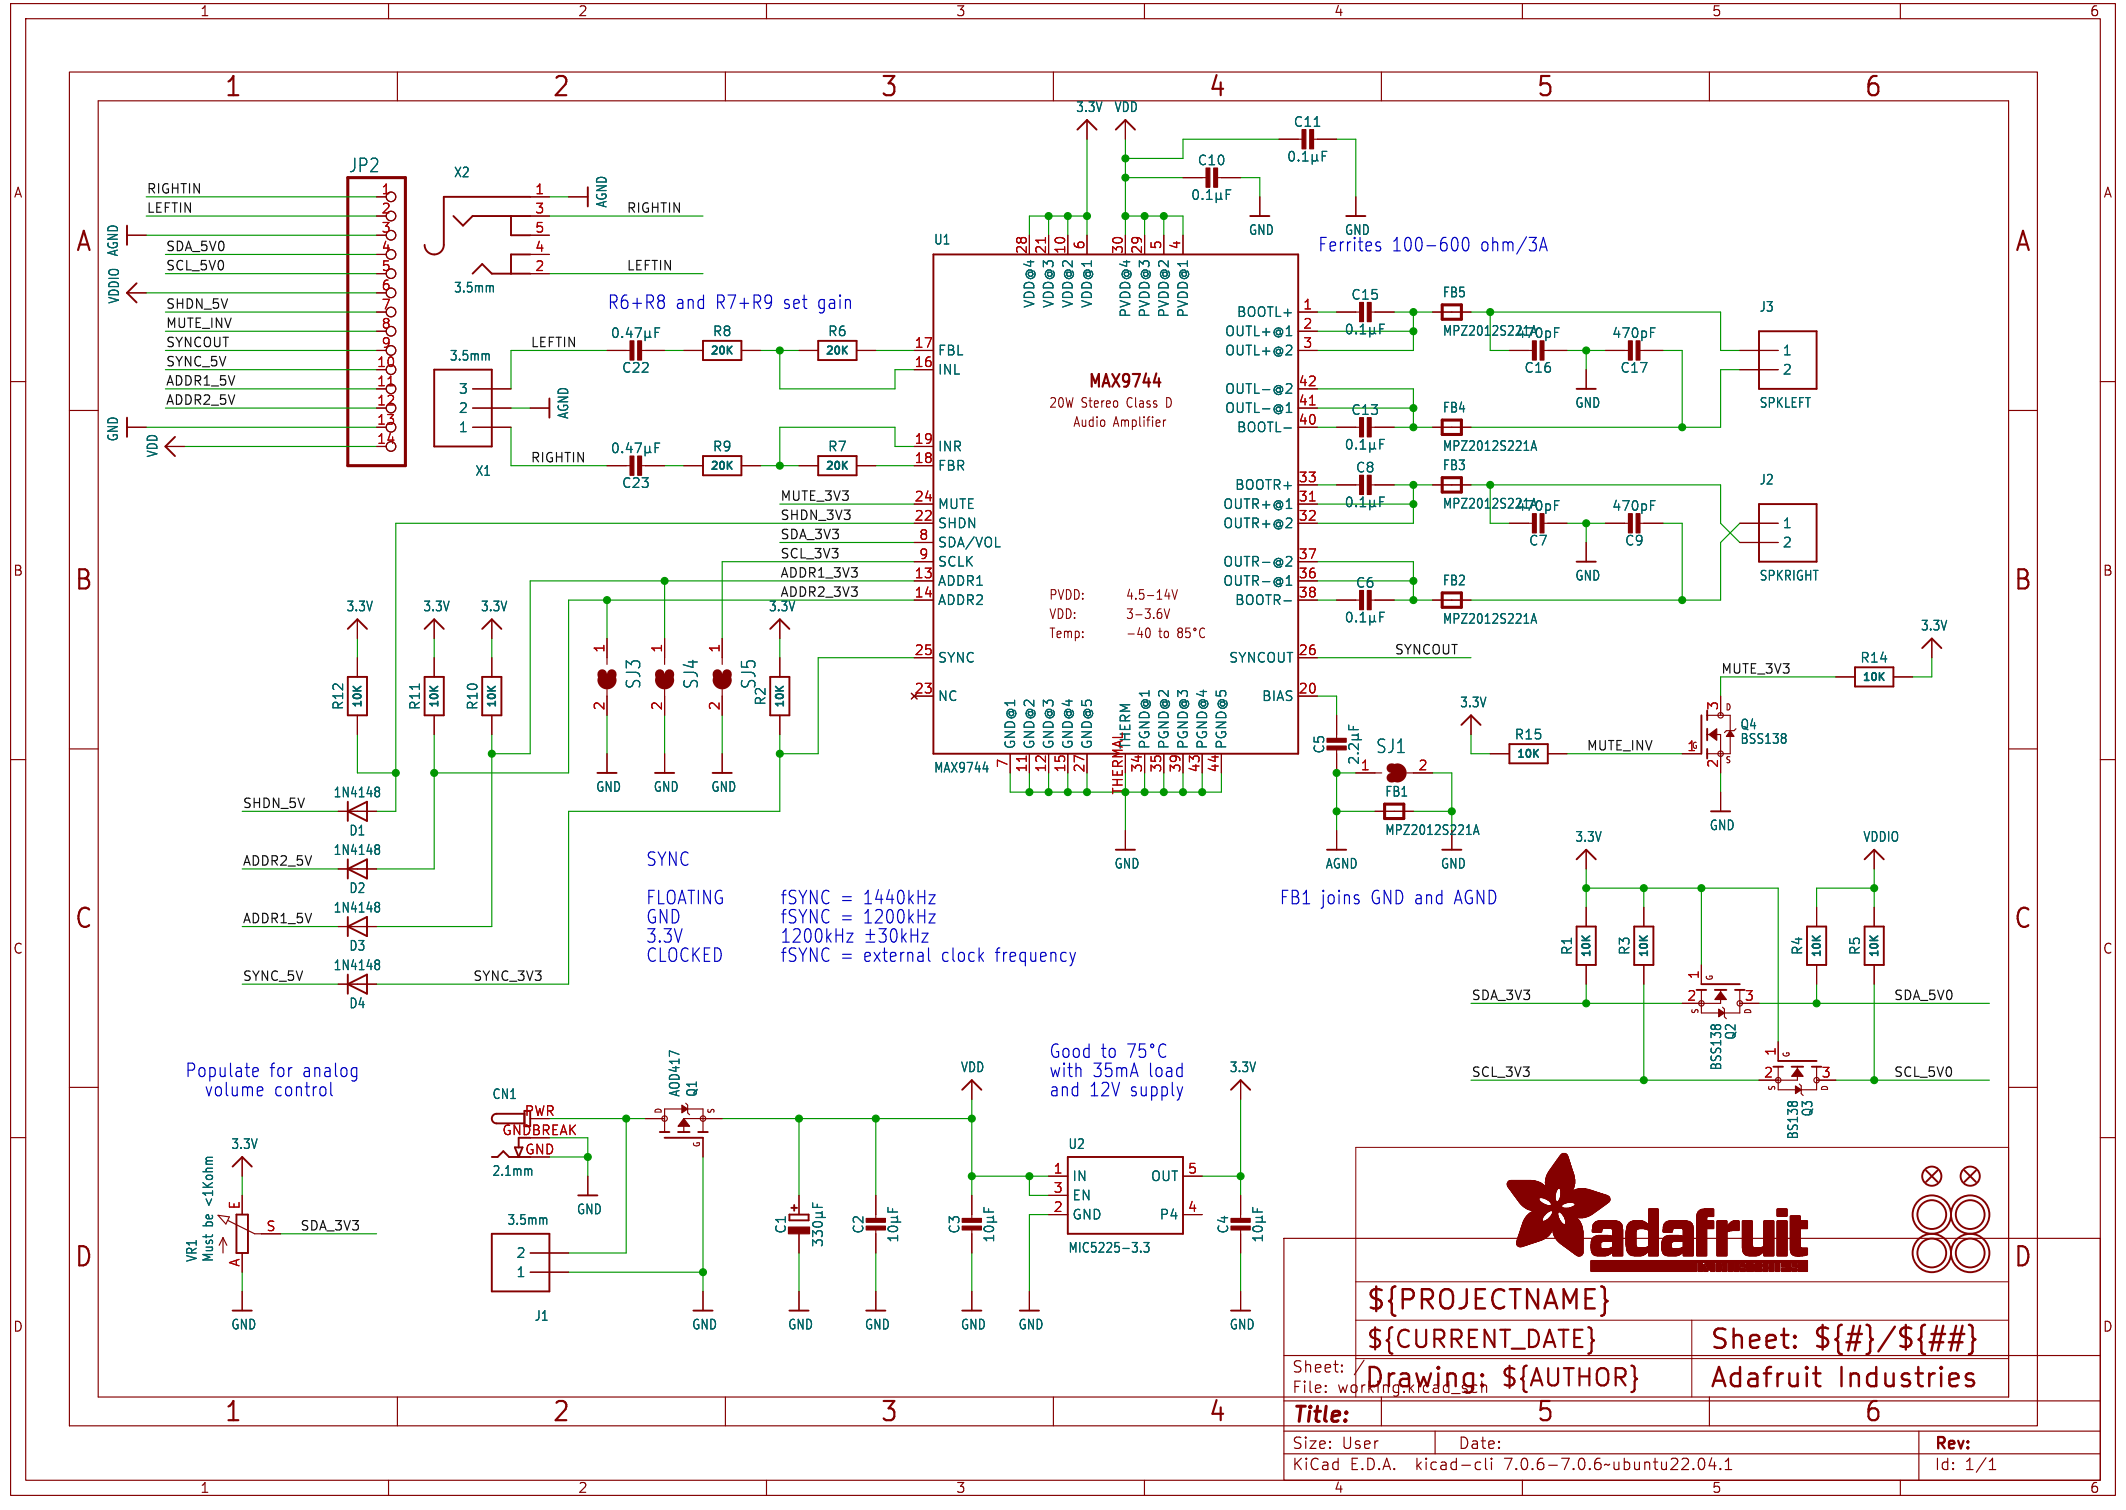
JP2
RIGHTIN
LEFTIN
SDA_5V0
SCL_5V0
SHDN_5V
MUTE_INV
SYNCOUT
SYNC_5V
ADDR1_5V
ADDR2_5V
AGND
VDDIO
GND
VDD
X2
3.5mm
X1
R6+R8 and R7+R9 set gain
0.47µF
C22
C23
R8
R9
R6
R7
20K
FBL
INL
INR
FBR
U1
MAX9744
20W Stereo Class D
Audio Amplifier
PVDD: 4.5–14V
VDD: 3–3.6V
Temp: –40 to 85°C
Ferrites 100–600 ohm/3A
C10
C11
0.1µF
C15
C16
C17
C13
C8
C7
C9
C6
C5
2.2µF
FB1
FB2
FB3
FB4
FB5
MPZ2012S221A
470pF
J3
J2
SPKLEFT
SPKRIGHT
BOOTL+
OUTL+@1
OUTL+@2
OUTL–@2
OUTL–@1
BOOTL–
BOOTR+
OUTR+@1
OUTR+@2
OUTR–@2
OUTR–@1
BOOTR–
SYNCOUT
BIAS
MUTE_3V3
SHDN_3V3
SDA_3V3
SCL_3V3
ADDR1_3V3
ADDR2_3V3
MUTE
SHDN
SDA/VOL
SCLK
ADDR1
ADDR2
SYNC
NC
SJ1
SJ3
SJ4
SJ5
R2
R10
R11
R12
R14
R15
10K
1N4148
D1
D2
D3
D4
SHDN_5V
ADDR2_5V
ADDR1_5V
SYNC_5V
SYNC_3V3
Q4
BSS138
MUTE_INV
SYNC
FLOATING fSYNC = 1440kHz
GND fSYNC = 1200kHz
3.3V 1200kHz ±30kHz
CLOCKED fSYNC = external clock frequency
FB1 joins GND and AGND
R1
R3
R4
R5
Q2
Q3
SDA_5V0
SCL_5V0
Populate for analog
volume control
VR1
Must be <1Kohm
CN1
PWR
GNDBREAK
GND
2.1mm
3.5mm
J1
AOD417
Q1
C1
330µF
C2
10µF
C3
10µF
C4
10µF
U2
MIC5225-3.3
IN
EN
GND
OUT
P4
Good to 75°C
with 35mA load
and 12V supply
${PROJECTNAME}
${CURRENT_DATE}
Sheet: ${#}/${##}
Drawing: ${AUTHOR}
Adafruit Industries
Sheet: /
File: working.kicad_sch
Title:
Size: User
Date:
Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Id: 1/1