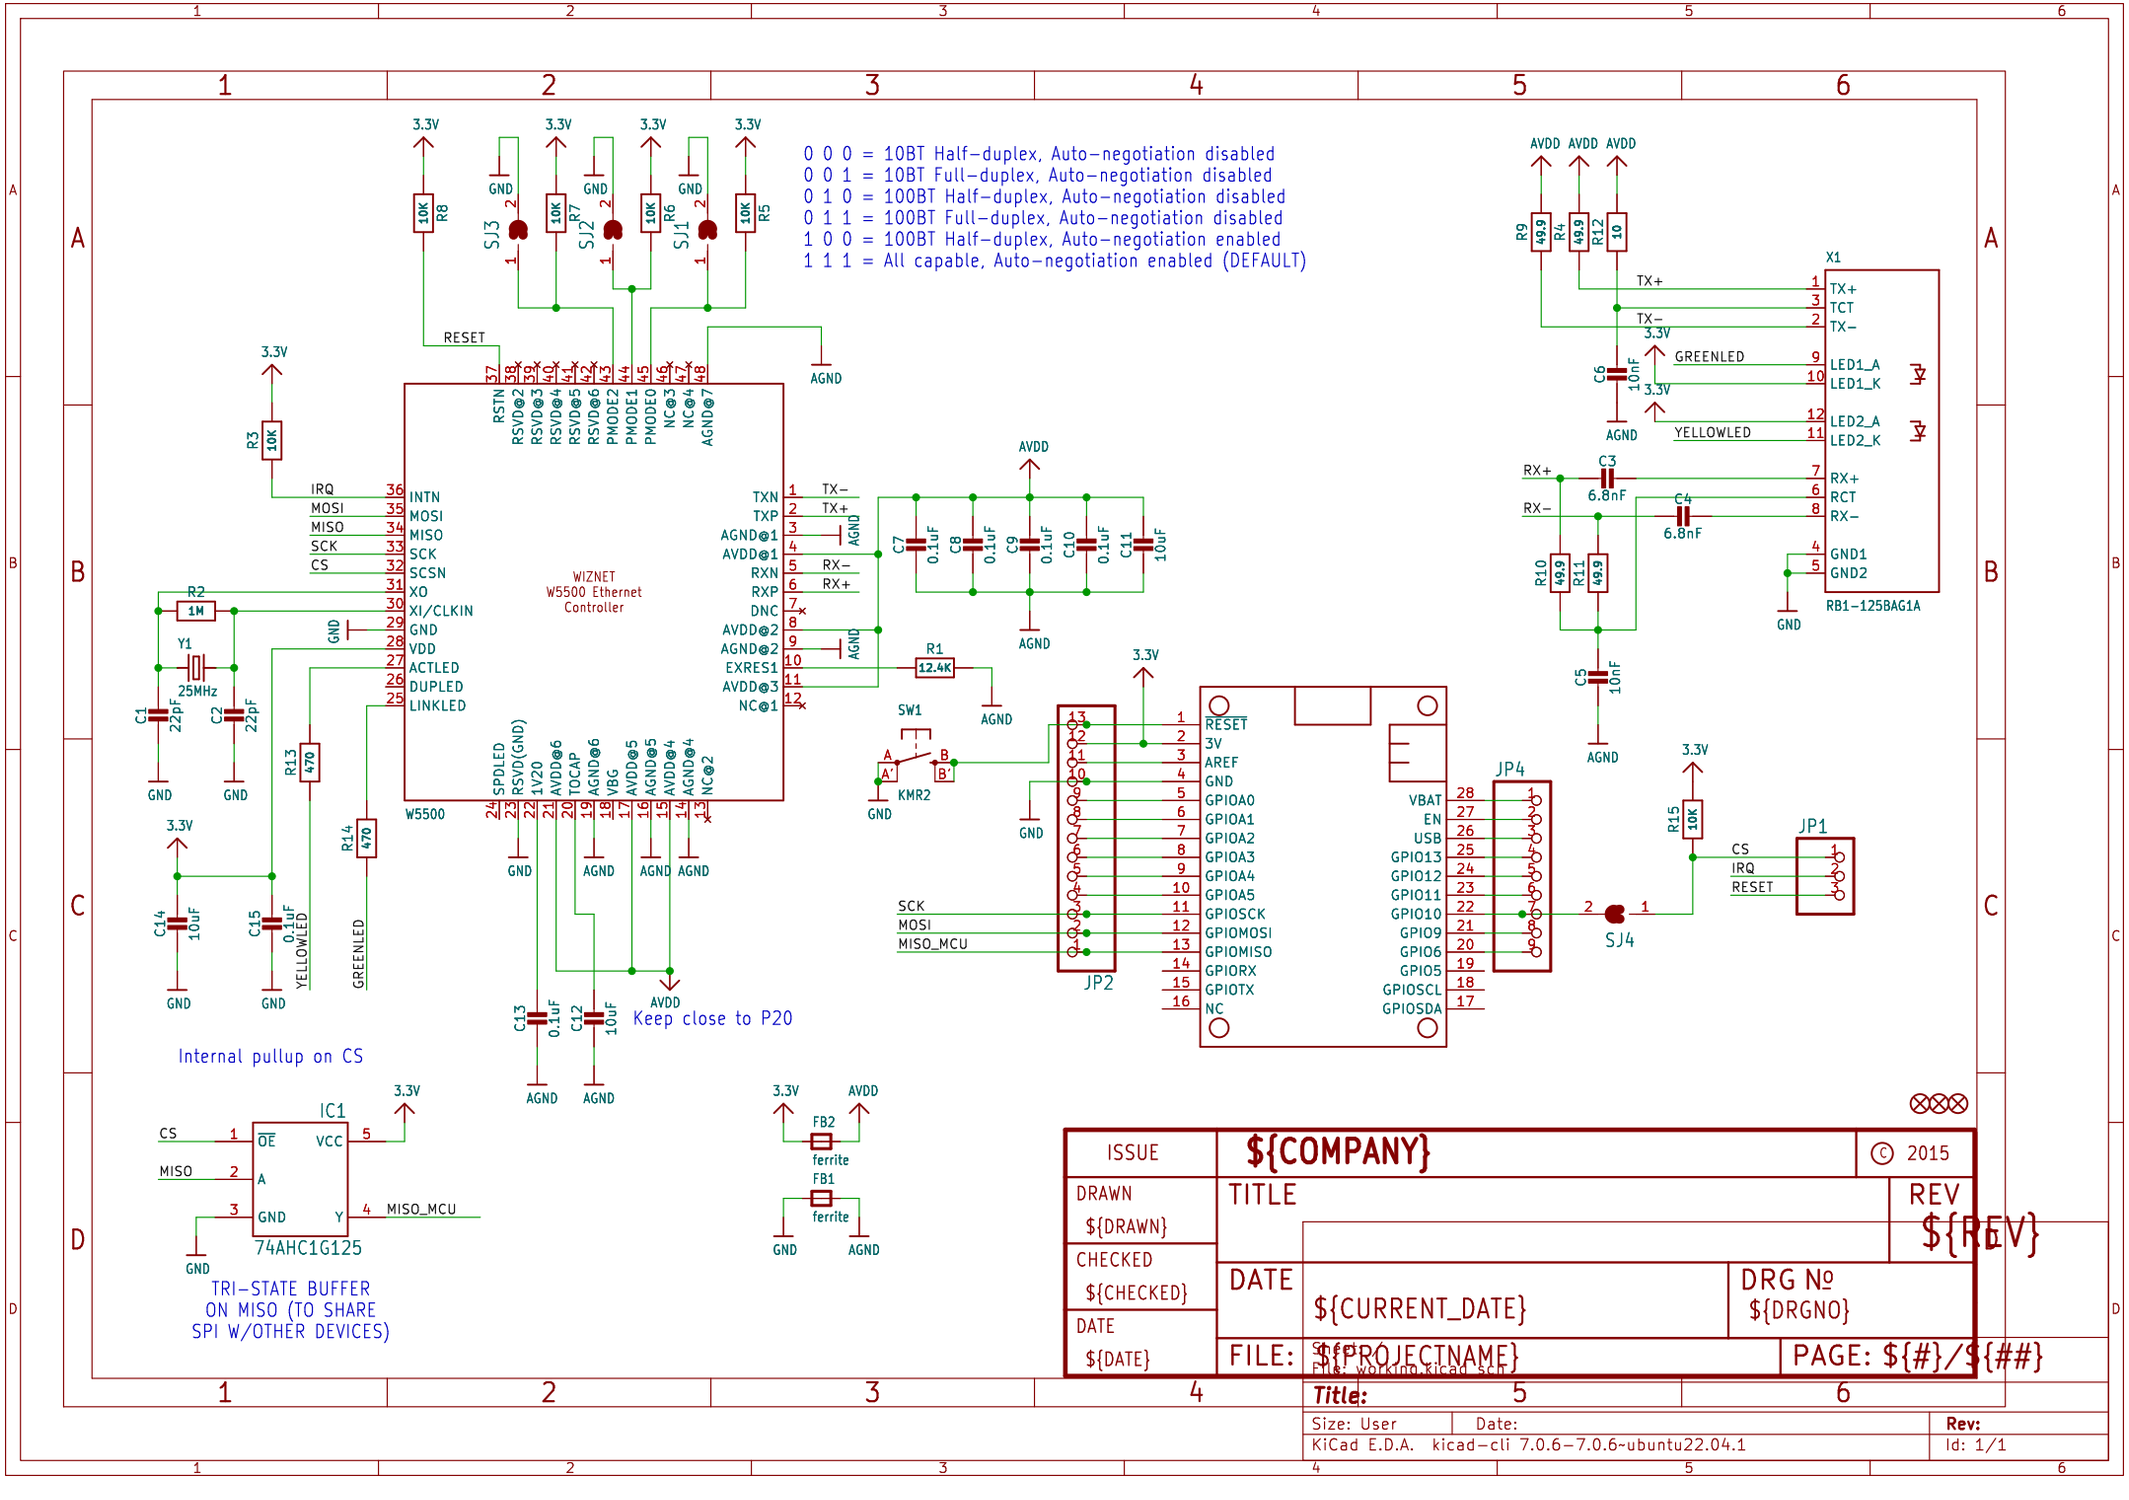

0 0 0 = 10BT Half-duplex, Auto-negotiation disabled
0 0 1 = 10BT Full-duplex, Auto-negotiation disabled
0 1 0 = 100BT Half-duplex, Auto-negotiation disabled
0 1 1 = 100BT Full-duplex, Auto-negotiation disabled
1 0 0 = 100BT Half-duplex, Auto-negotiation enabled
1 1 1 = All capable, Auto-negotiation enabled (DEFAULT)
WIZNET
W5500 Ethernet
Controller
W5500
RB1-125BAG1A
74AHC1G125
KMR2
Internal pullup on CS
TRI-STATE BUFFER
ON MISO (TO SHARE
SPI W/OTHER DEVICES)
Keep close to P20
${COMPANY}
TITLE
${REV}
${CURRENT_DATE}
${DRGNO}
${PROJECTNAME}
${#}/${##}
${DRAWN}
${CHECKED}
${DATE}
Size: User
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1
Id: 1/1