

TODO: through hole gpio
through hole 2x3 conn
through hole 2.1mm barrel
right angle on/off
reroute grounds

USB Connection & Selection

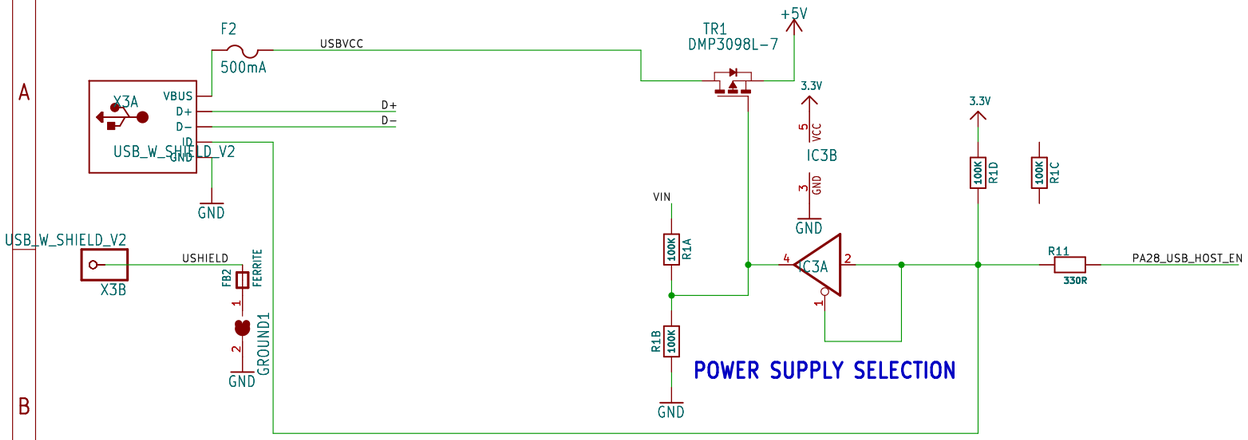


POWER SUPPLY SELECTION


POWER SUPPLY: 5V

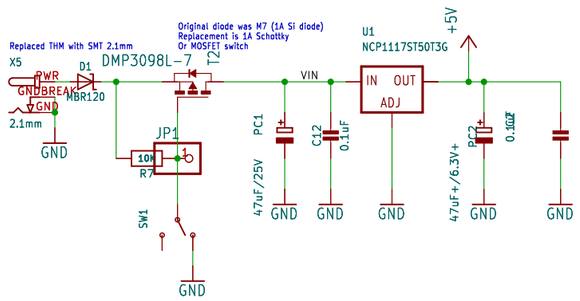


POWER SUPPLY: 3.3V

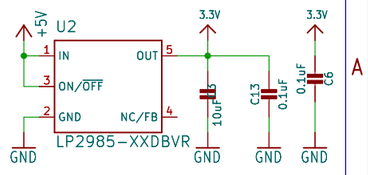


RX/TX LED

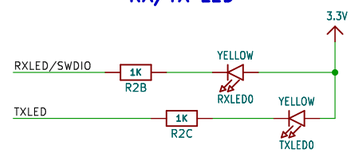


ATSAMD21G18

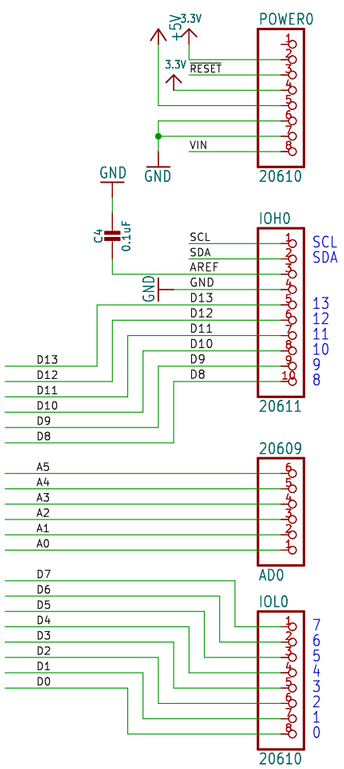


NEOPIXEL LED






SPI FLASH

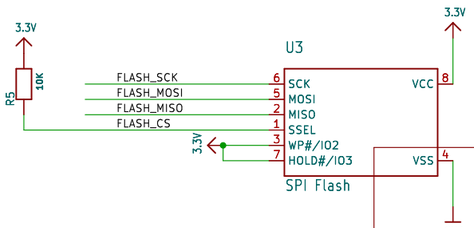

SWD Interface



Author: Limor Fried & KTOWN
${PROJECTNAME}
${CURRENT_DATE}
Sheet: ${#}/${##}

Sheet: /
File: working.kicad_sch

Title:

Size: User | Date: | Rev:
KiCad E.D.A. eeschema 7.0.6 | Id: 1/1