

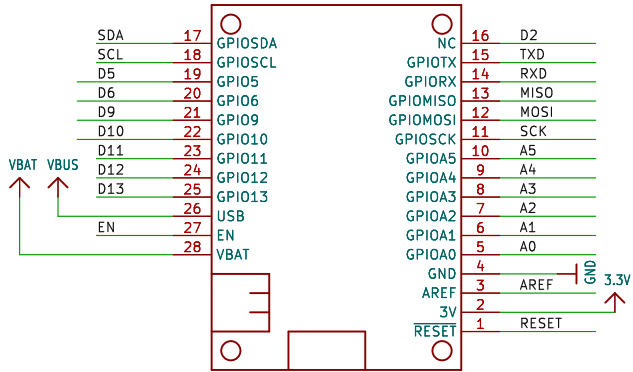



ISSUE	\${COMPANY}		© \${YEAR}
DRAWN \${DRAWN}	TITLE		REV \${REV}
CHECKED \${CHECKED}	DATE \${CURRENT_DATE}	DRG N° \${DRGNO}	
DATE \${DATE}	FILE: \${PROJECTNAME}		PAGE: \${#}/\${##}

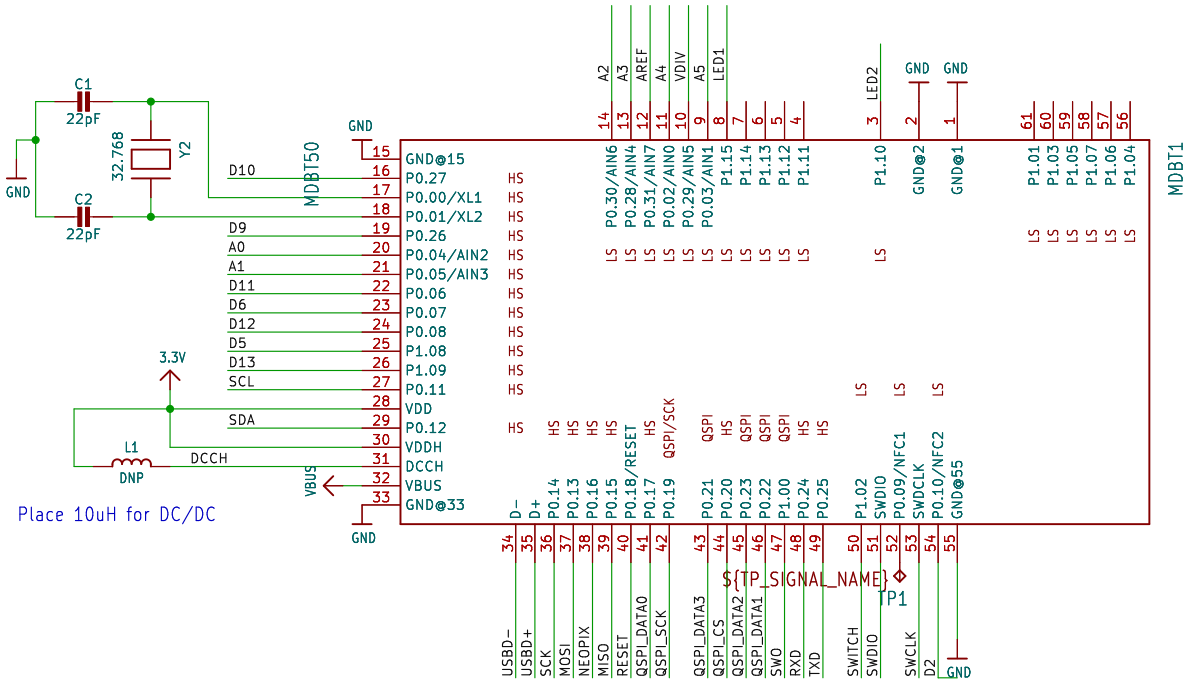


RESET/USER SWITCHES

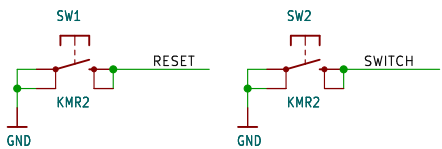


DECOUPLING CAPS

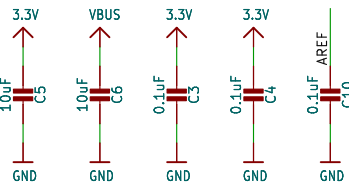


SWD DEBUGGER

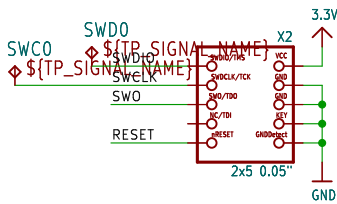


16MBIT QSPI FLASH

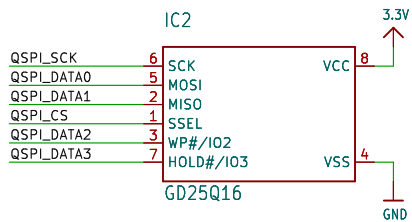


MICRO USB

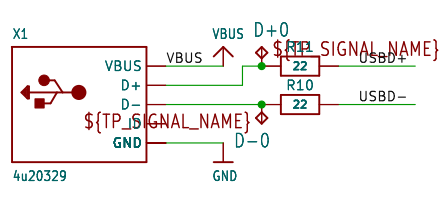


NEOPIXEL

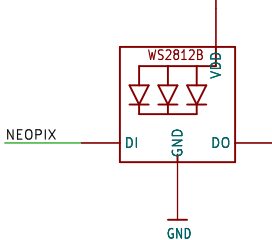

INDICATOR LEDS

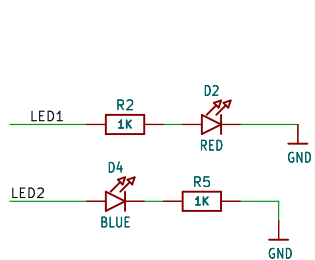


POWER AND FILTERING
(600mA Output)

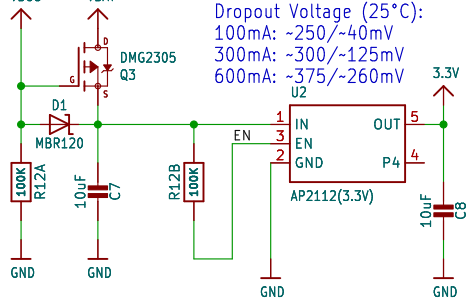


JST PH LIPO INPUT

Dynamic VIN selection: VBUS (USB) will override VBAT (LIPO) via D5 when both are present.

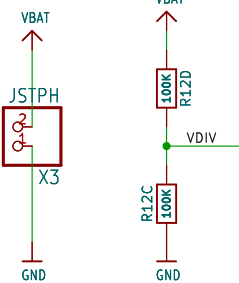

LIPO CHARGING

To charge the LIPO, insert the battery in the JST PH connector and connect USB at the same time.

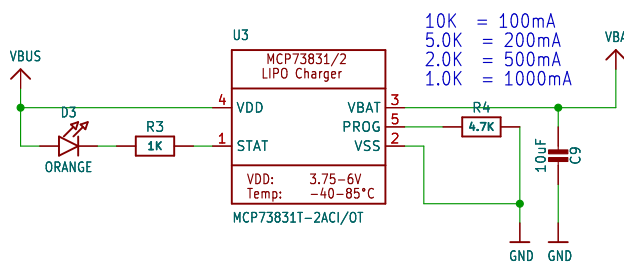

Sheet: /
File: working.kicad_sch

Title:		7		8	
Size: User		Date:			Rev:
KiCad E.D.A. eeschema 7.0.6					Id: 1/1