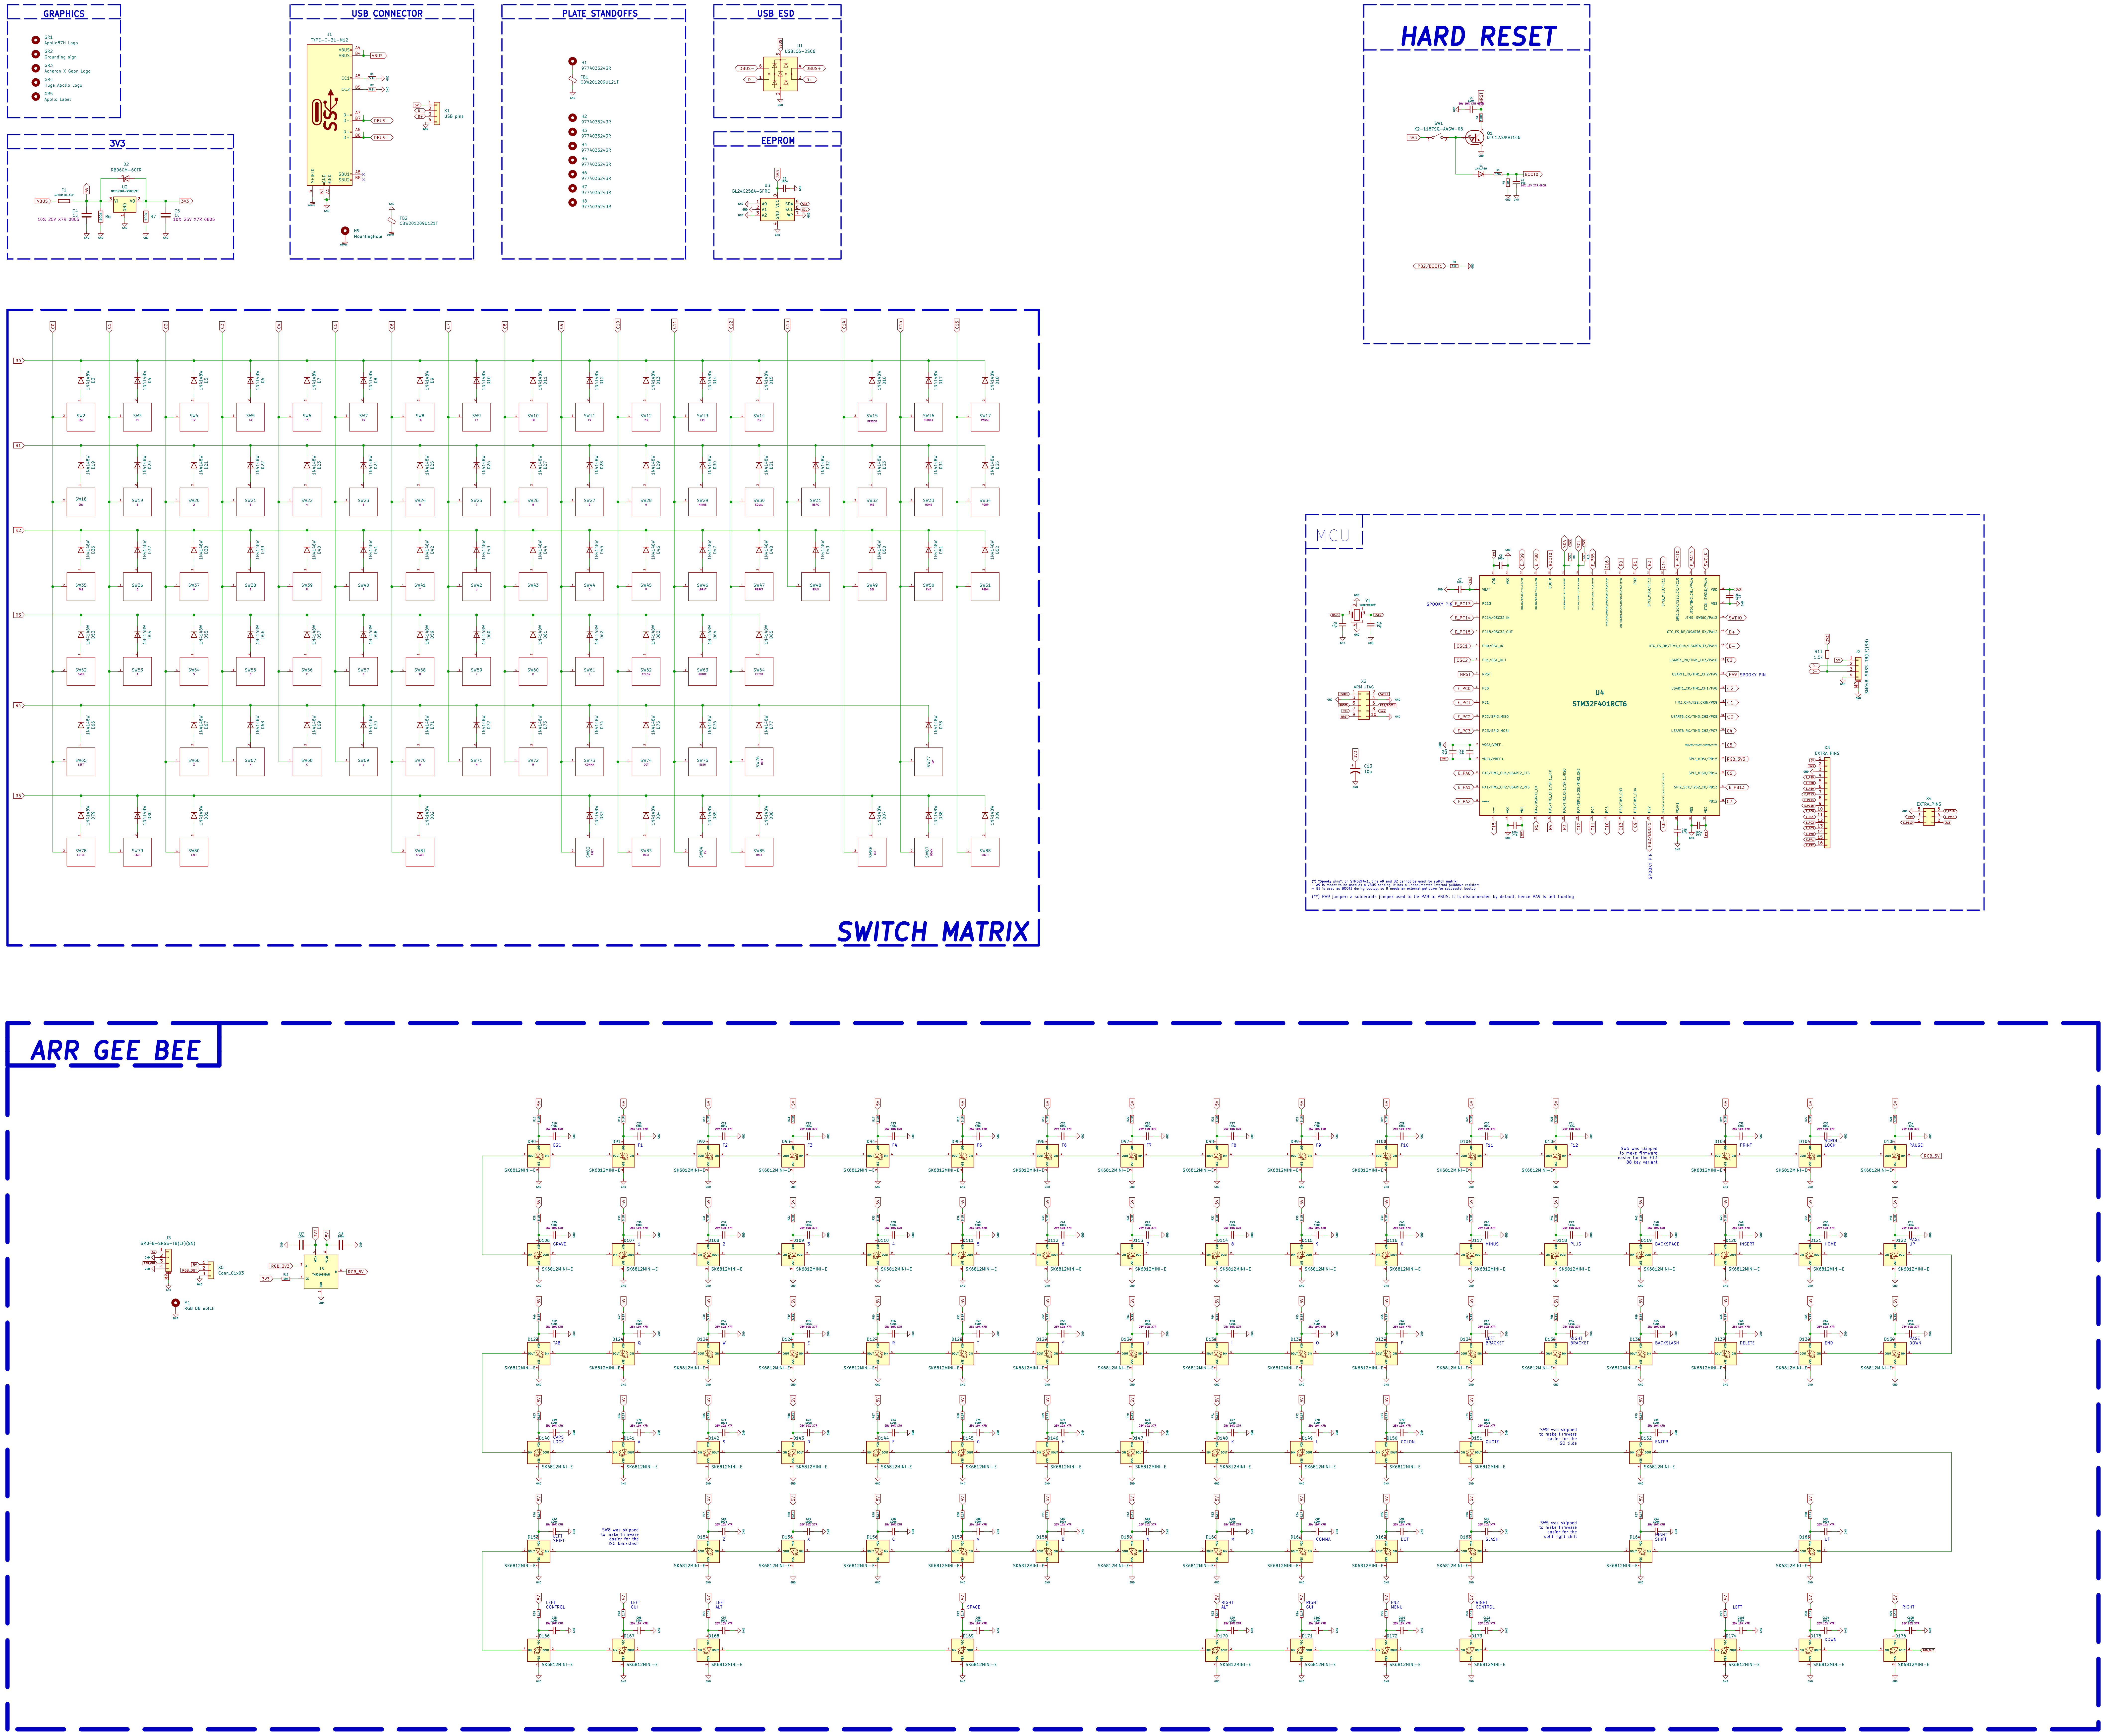

(*) "Spooky pins": on STM32F4x1, pins A9 and B2 cannot be used for switch matrix:
- A9 is meant to be used as a VBUS sensing. It has a undocumented internal pulldown resistor;
- B2 is used as BOOT1 during bootup, so it needs an external pulldown for successful bootup

(**) PA9 jumper: a solderable jumper used to tie PA9 to VBUS. It is disconnected by default, hence PA9 is left floating

SW5 was skipped to make firmware easier for the F13 88 key variant

SW8 was skipped to make firmware easier for the ISO tilde

SW8 was skipped to make firmware easier for the ISO backslash

SW5 was skipped to make firmware easier for the split right shift

For the AcheronProject
Designed by Gondolindrim
Sheet: /
File: working.kicad_sch
Title: Apollo87H PCB schematic
Size: A0
Date: 2022-04-12
Rev: v4.1.9
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Id: 1/1