



Power Supply


Battery Measurement

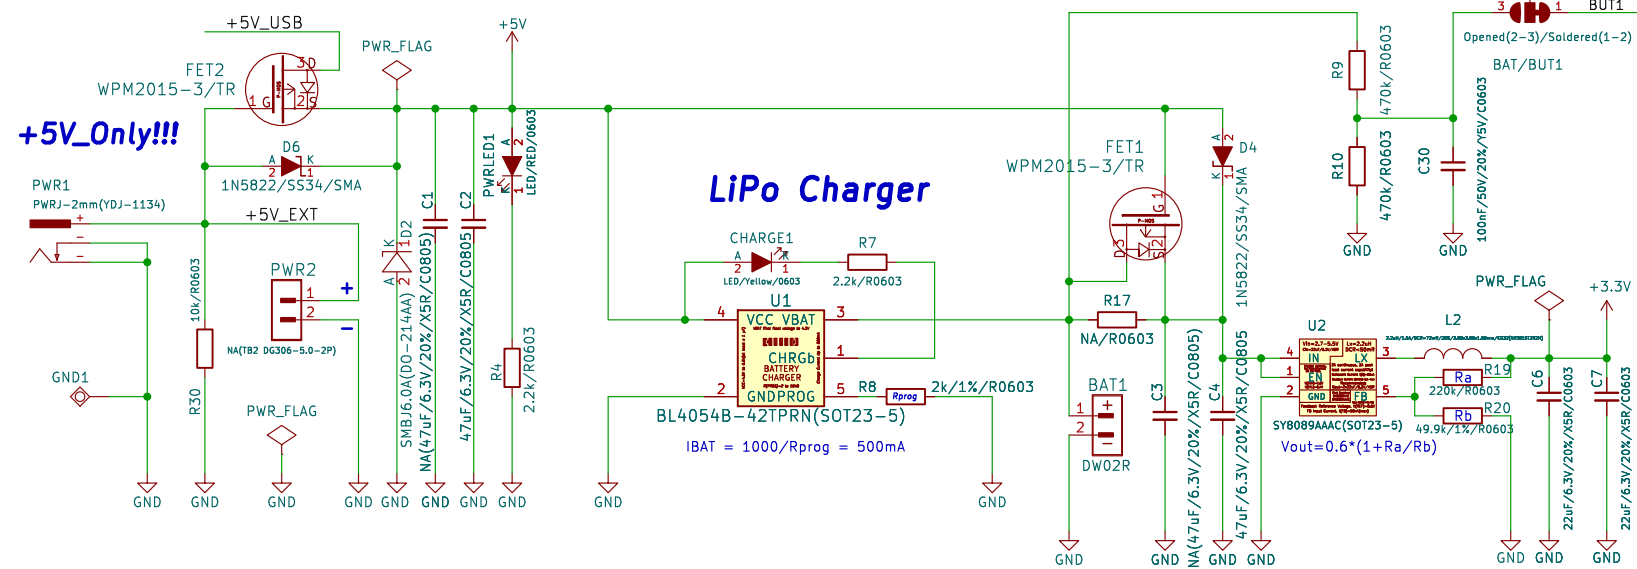


ESP-WROOM-32 MODULE

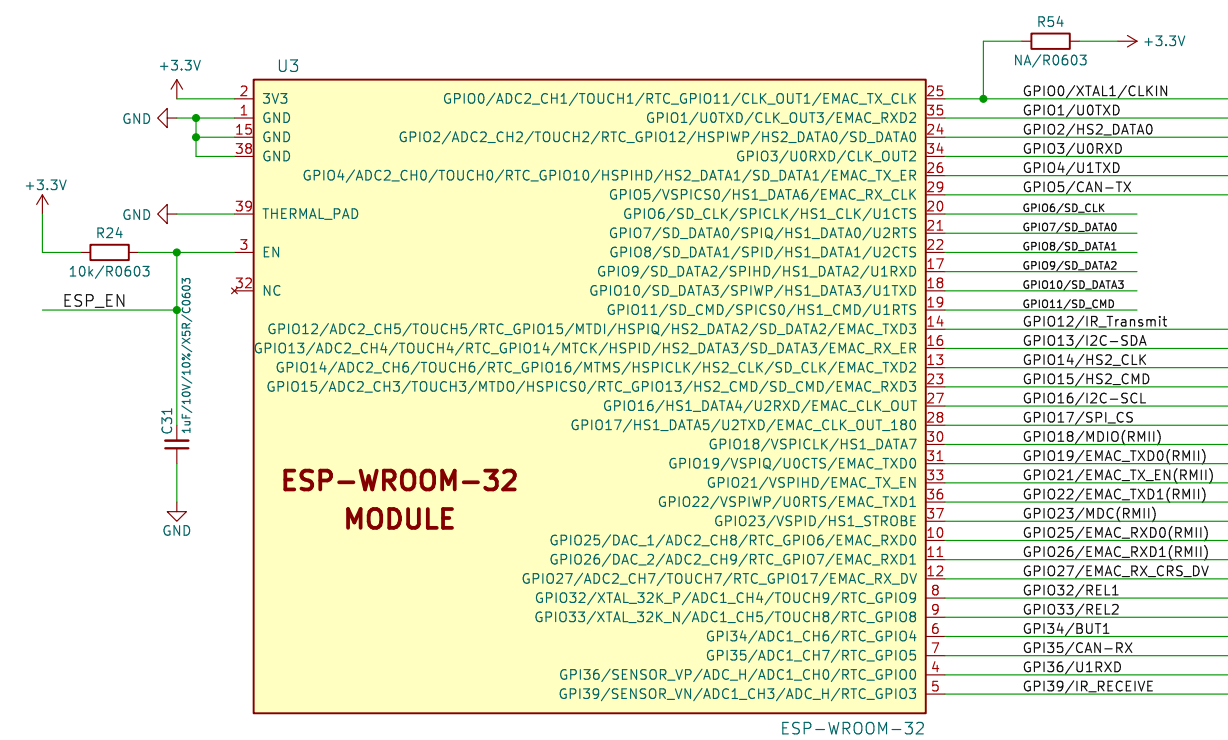


Extension

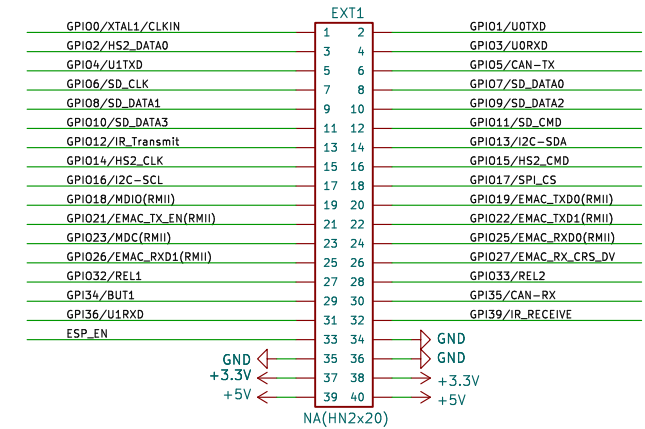


Ethernet

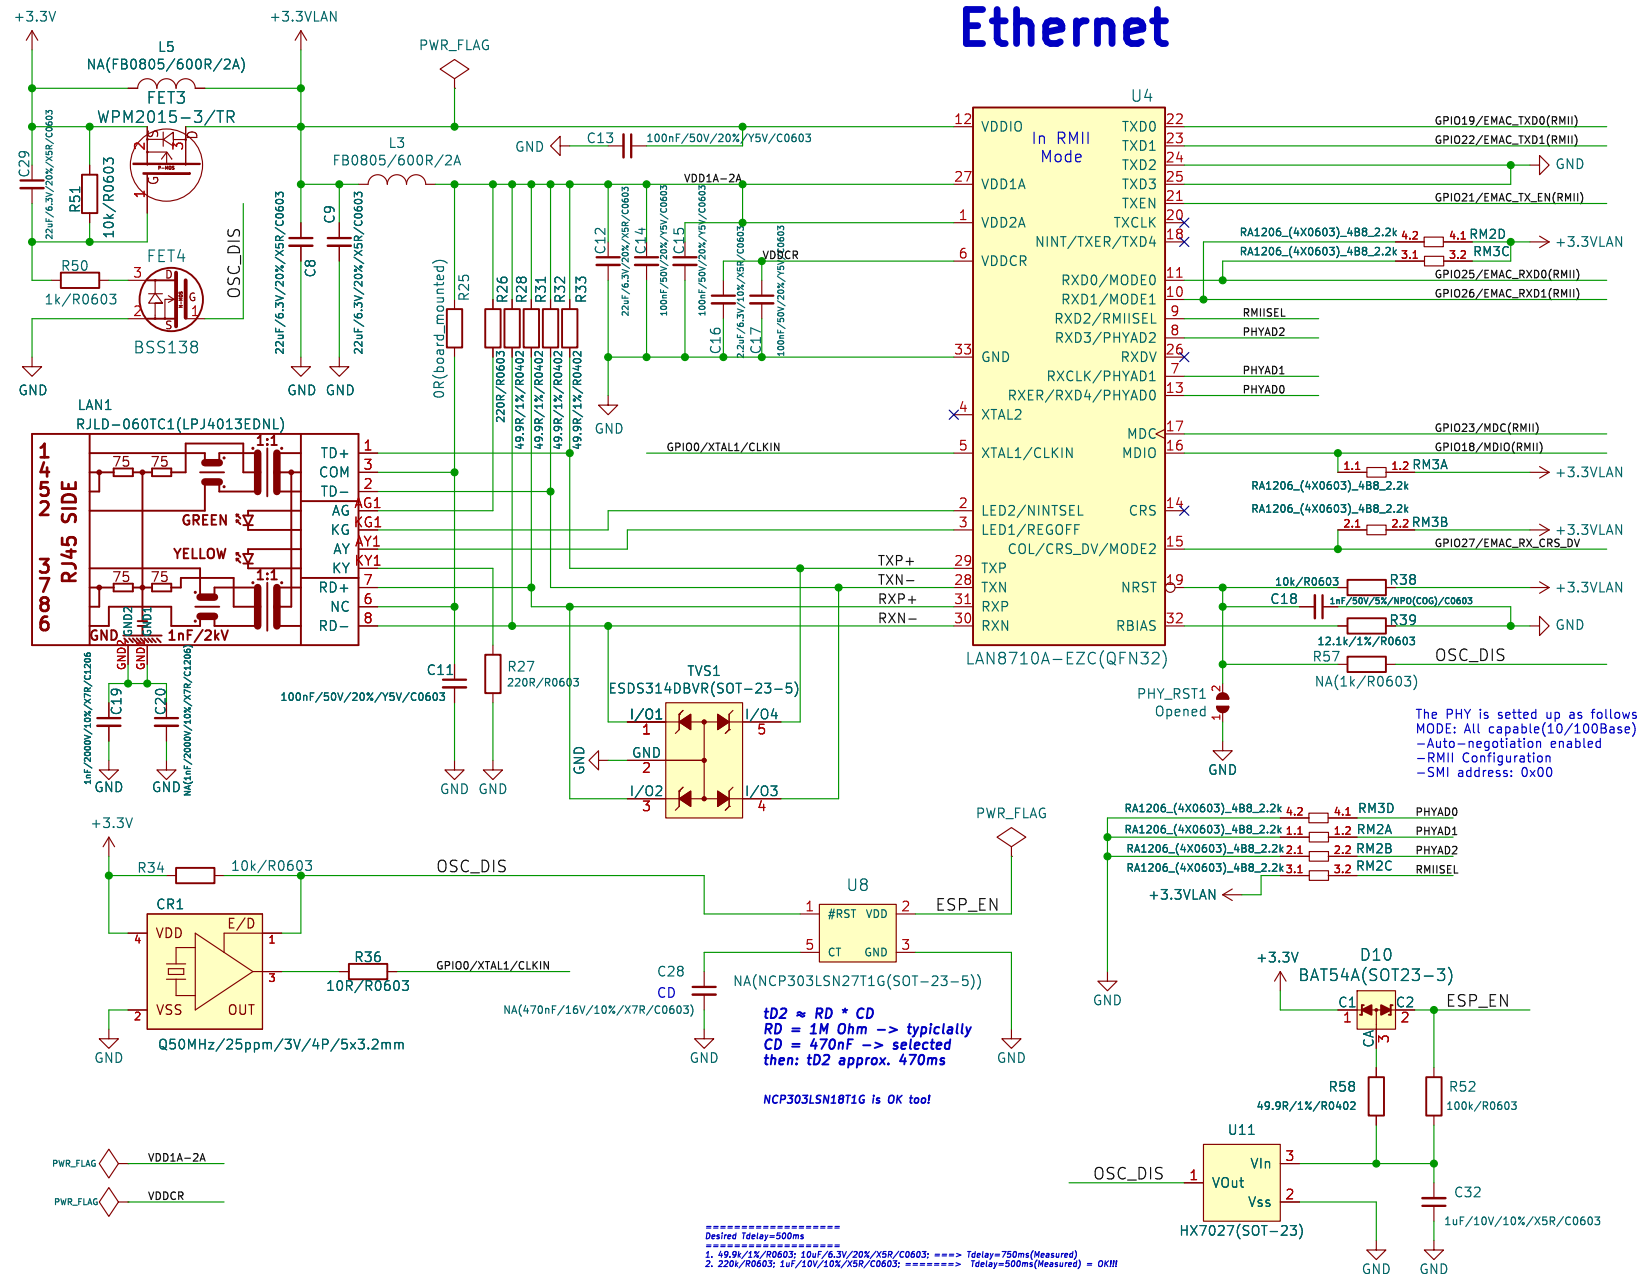


Relays

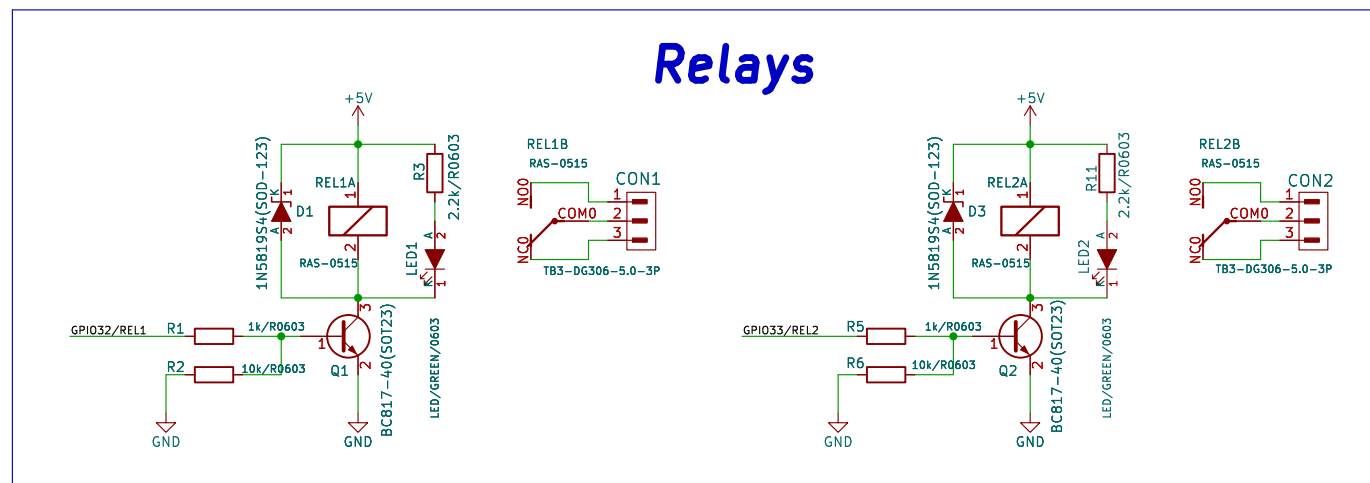


Infrared Communication

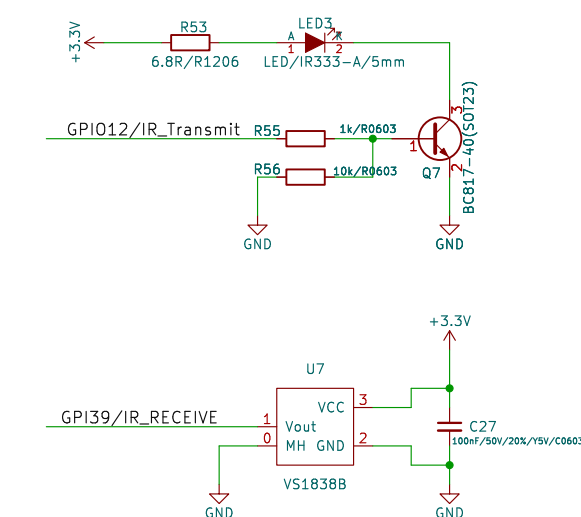


UEXT

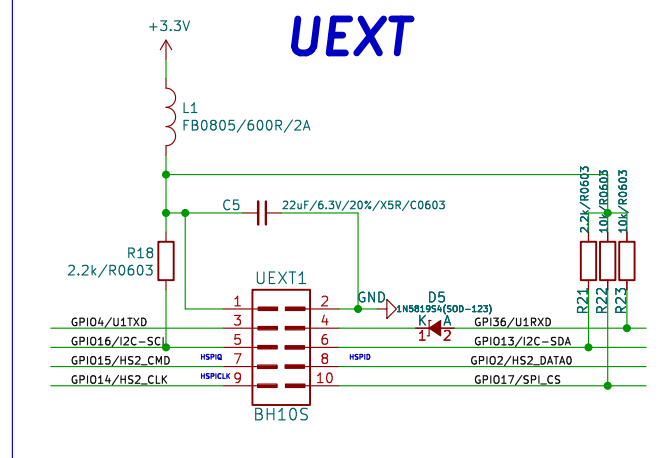


SD/MMC Card

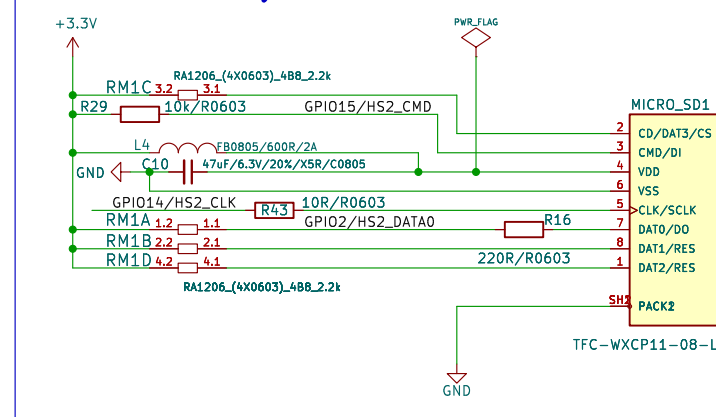


Buttons

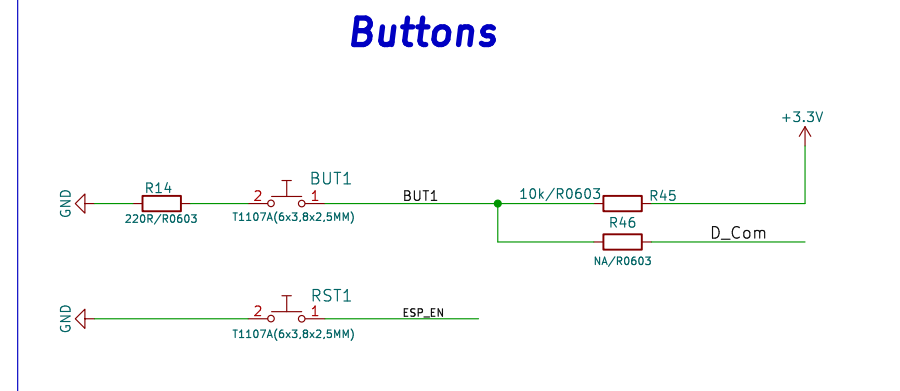

USB to UART

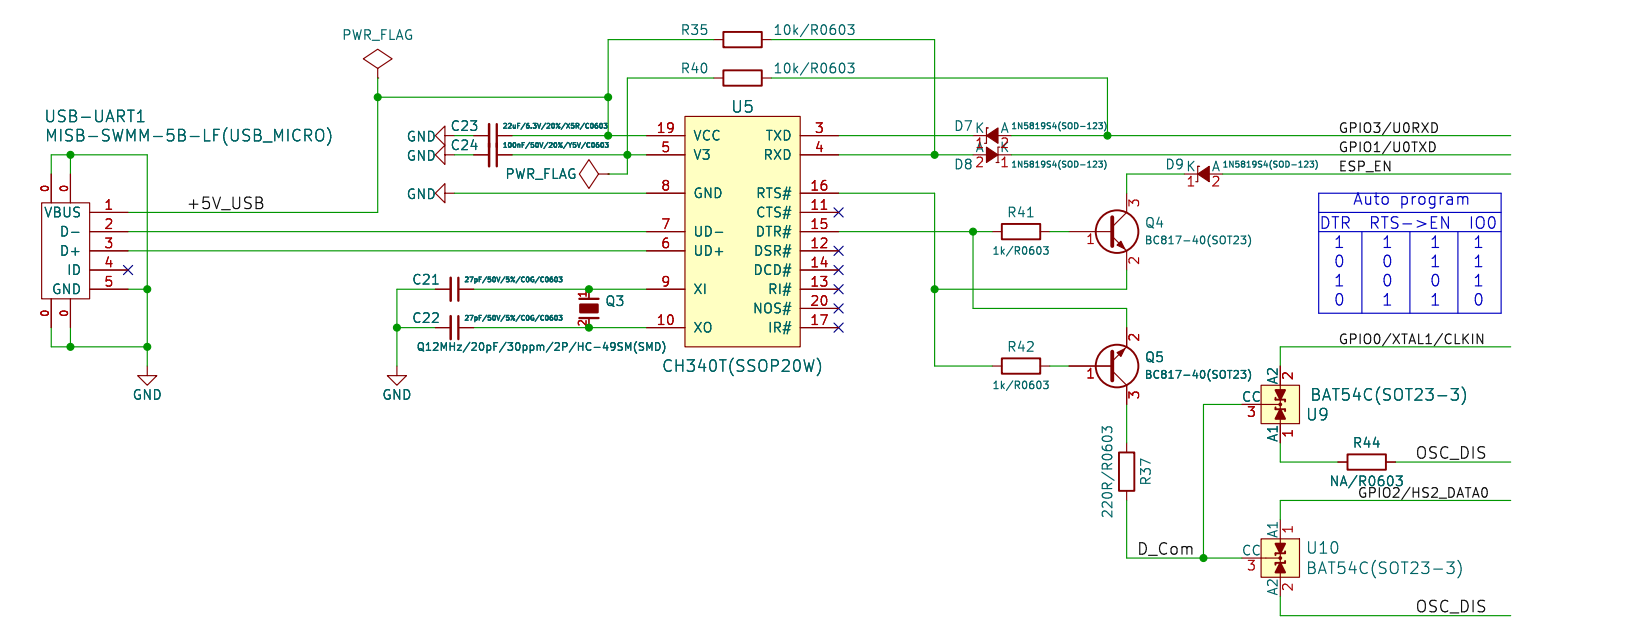


CAN Driver

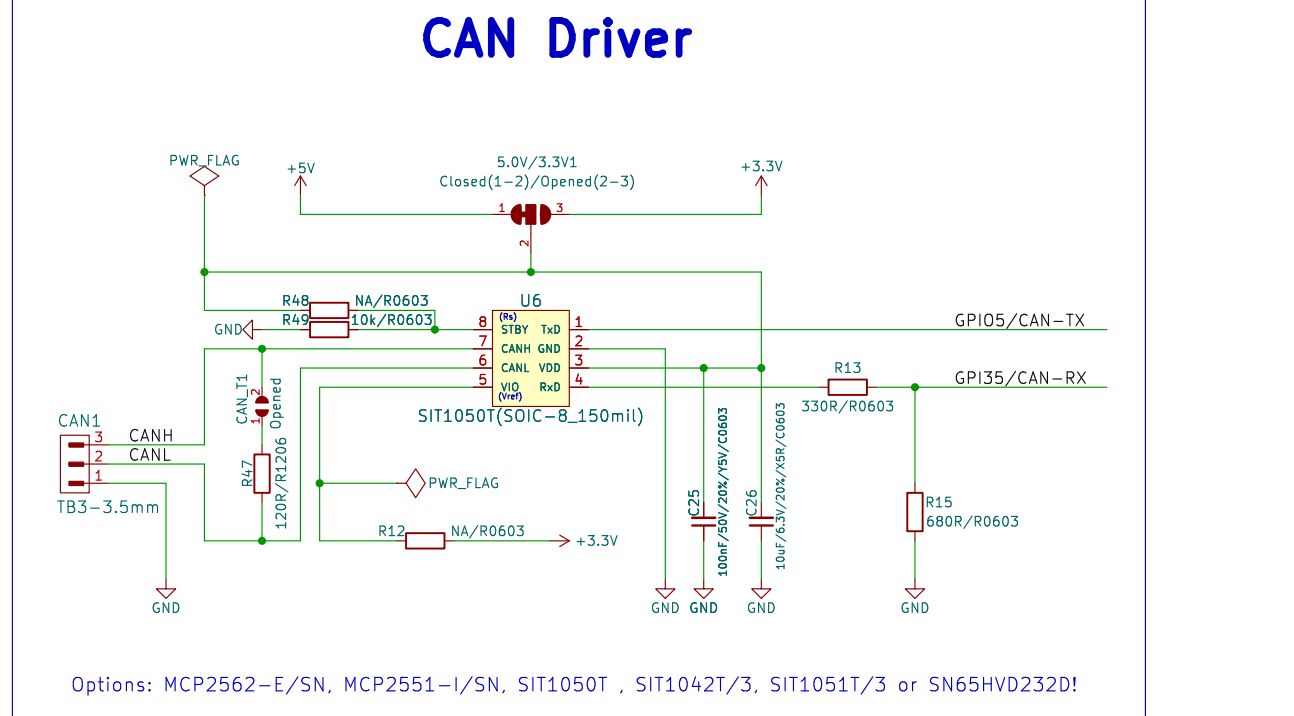

Software Selectable Pins		
Interface	Signal	Pin
EMAC	EMAC_MDC_out	Any GPIO
	EMAC_MDIO_in	
	EMAC_MDIO_out	
	EMAC_CRS_out	
I2C	I2C_EXT0_SCL_in	Any GPIO
	I2C_EXT0_SDA_in	
	I2C_EXT1_SCL_in	
	I2C_EXT1_SDA_in	
General Purpose SPI	HSPICLK_in/out	Any GPIO
	HSPICLK_in/out	
	HSPICLK_in/out	
	HSPICLK_in/out	

Mounting Holes



Internal Bootstrapping Resistors

MTD/GPIO12:	Pull-Down
GPIO0:	Pull-Up
GPIO2:	Pull-Down
MTD0/GPIO15:	Pull-Up
GPIO5:	Pull-Up

Voltage of Internal LDO (VDD_VDDIO)		
Pin	Default	1.8V
GPIO12/MTD0	Pull-Down	0
Bootstrapping Mode		
Pin	Default	SPI Flash Boot
GPIO0	Pull-Up	1
GPIO2	Pull-Down	0
Debugging Log on U0TXD During Booting		
Pin	Default	U0TXD Silent
GPIO15/MTD0	Pull-Up	1
Timing of SIO Slave		
Pin	Default	Falling-edgeOutput
GPIO15/MTD0	Pull-Up	0
GPIO5	Pull-Up	0
		1

OLIMEX
https://www.olimex.com
OLIMEX LTD.

open source hardware

Sheet: /
File: working.kicad_sch
Title: ESP32-EVB
Size: A2 Date: 2023-04-14 Rev: K1
KiCad E.D.A. eeschema 7.0.6 Id: 1/1