



MIDI IN

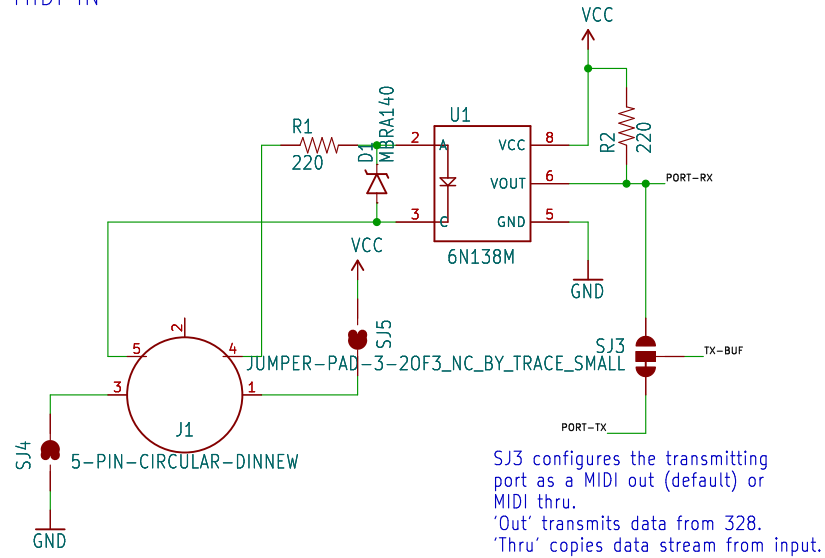

MIDI OUT

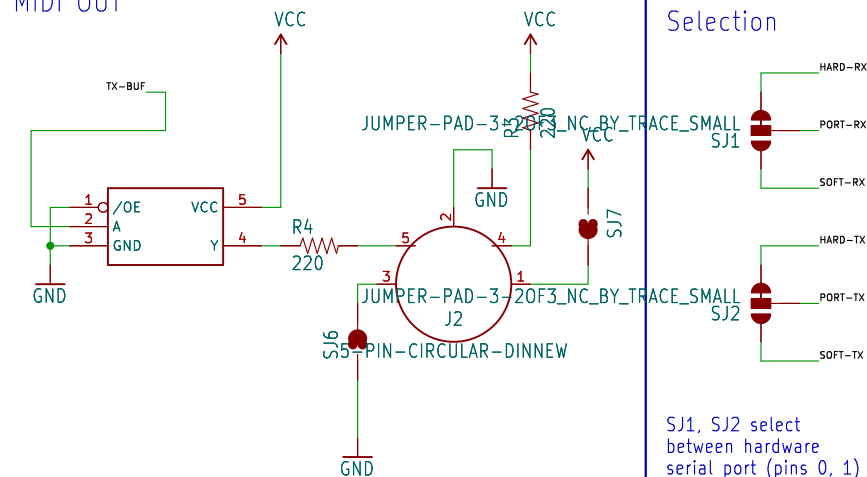


MIDI I/O reference design from:
<http://www.midi.org/techspecs/electricspec.php>
 SJ4, SJ5, SJ6, SJ7 implement power-over-MIDI,
 using pin assignment
 proposed by Craig Anderton
 (Pin 1 = Vcc, pin 3 = ground).
 Close JP4 & 5 to power the MIDI input.
 Close JP6 & 7 to power the output.

Serial Port Selection

SJ1, SJ2 select between hardware serial port (pins 0, 1) and soft-serial (pins 8, 9). Hardware serial selected by default.

Shield Connections and controls

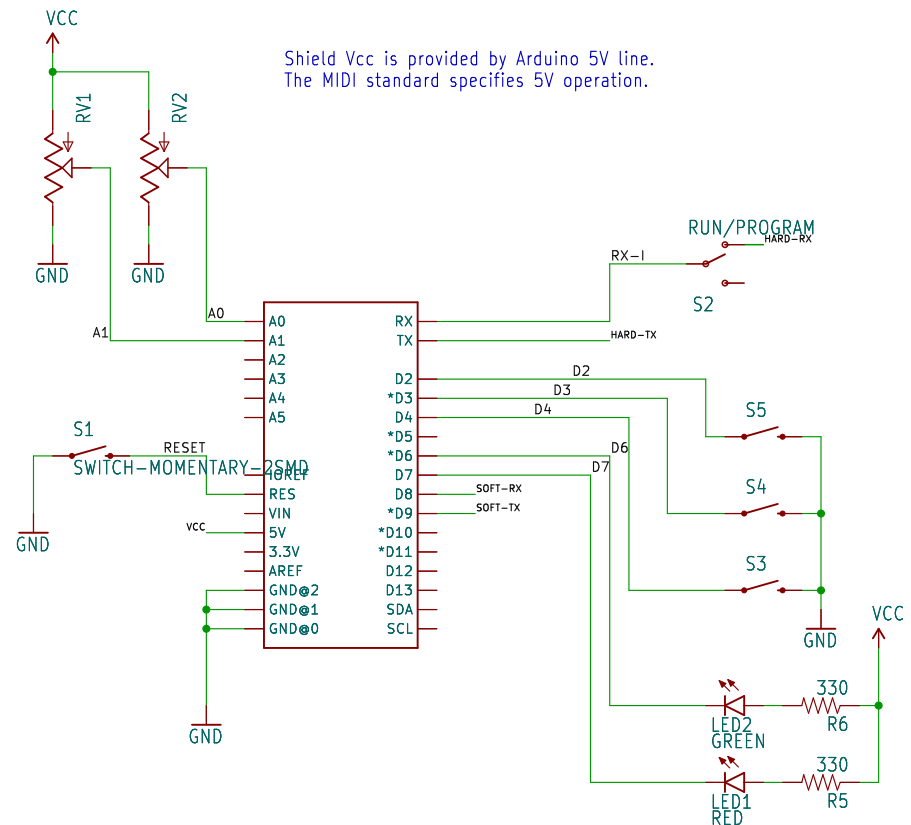

Shield Vcc is provided by Arduino 5V line.
The MIDI standard specifies 5V operation.

Set S2 to "PROG" to load Sketch on Arduino, then set to "RUN" for MIDI communication
LED1, LED2, RV1, RV2, S3, S4, and S5 are available for application usage.



open hardware

Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		⊗ ⊗
TITLE: \${PROJECTNAME}		
Design by: Chris Taylor Revision By: Byron Jacquot		REV: V1.5
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}
Size: User KiCad E.D.A.	Date: eeschema 7.0.6	Rev: Id: 1/1