



VDD 2.4 to 3.6 V
VDDIO 1.71 to VDD

SJ1
VDD VDDIO
Set VDD and VDDIO equal by default

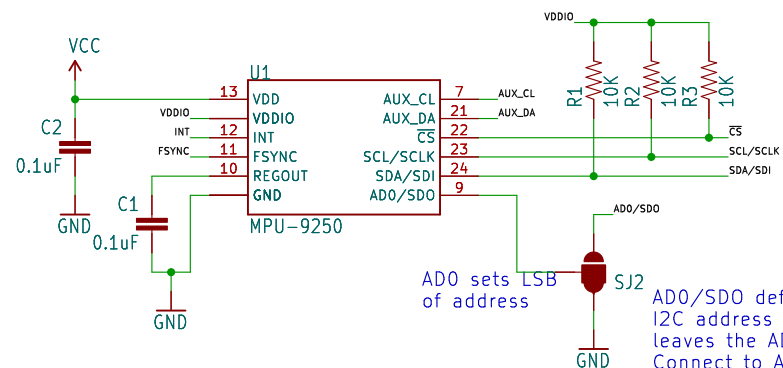

AD0 sets LSB
of address

AD0/SDO defaults to 0V. This sets the I2C address to 0b1101000 (0x68) and leaves the AD0/SDO PTH disconnected. Connect to AD0/SDO PTH to change externally. Pull high to set address to 0b1101001 (0x69).

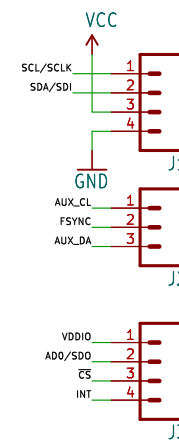

Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		☒ ☐
TITLE: \${PROJECTNAME}		
Design by: >DESIGNER		REV: >VERSION
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}