



LSM9DS1

VDD Range: 1.9–3.6V

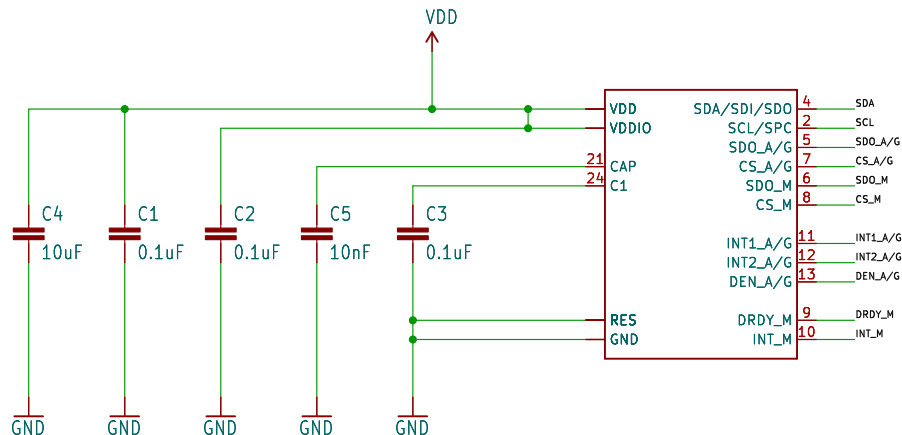


Spark Photon

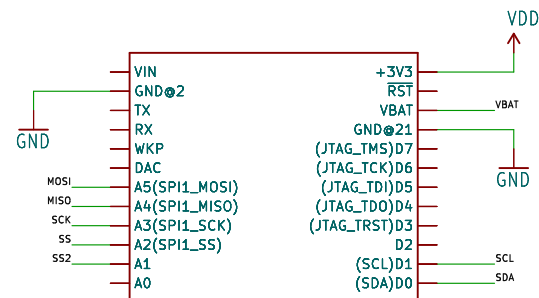

Jumpers


Set the SDO_AG and SDO_M to set the accel/gyro and mag I2C addresses:

SDOM/AG	AG Addr.	M Addr.
0	0x6A	0x1C
1	0x6B	0x1E

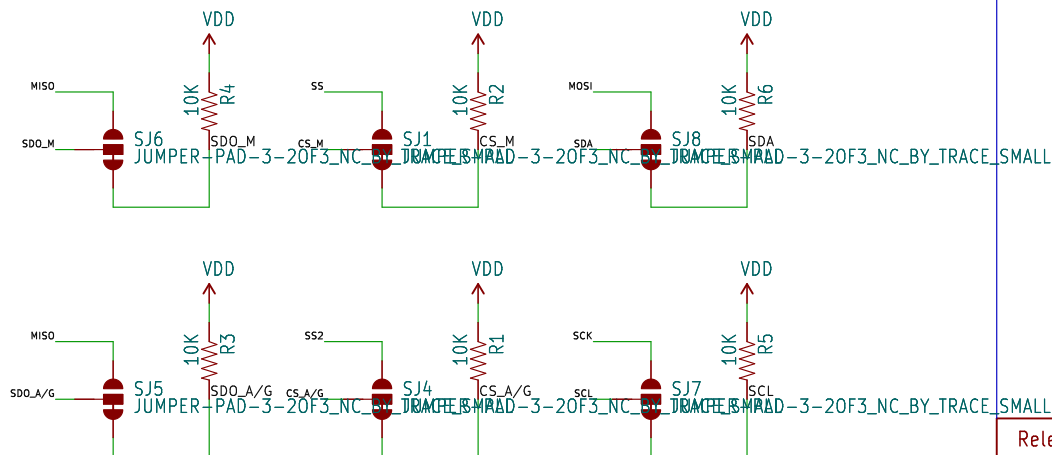

Close jumpers and cut former traces to enable SPI mode. Default is I2C.

Header



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Ben Leduc-Mills

REV:
v10

Sheet: /
Date: \${CURRENT_DATE} Title:

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1

