



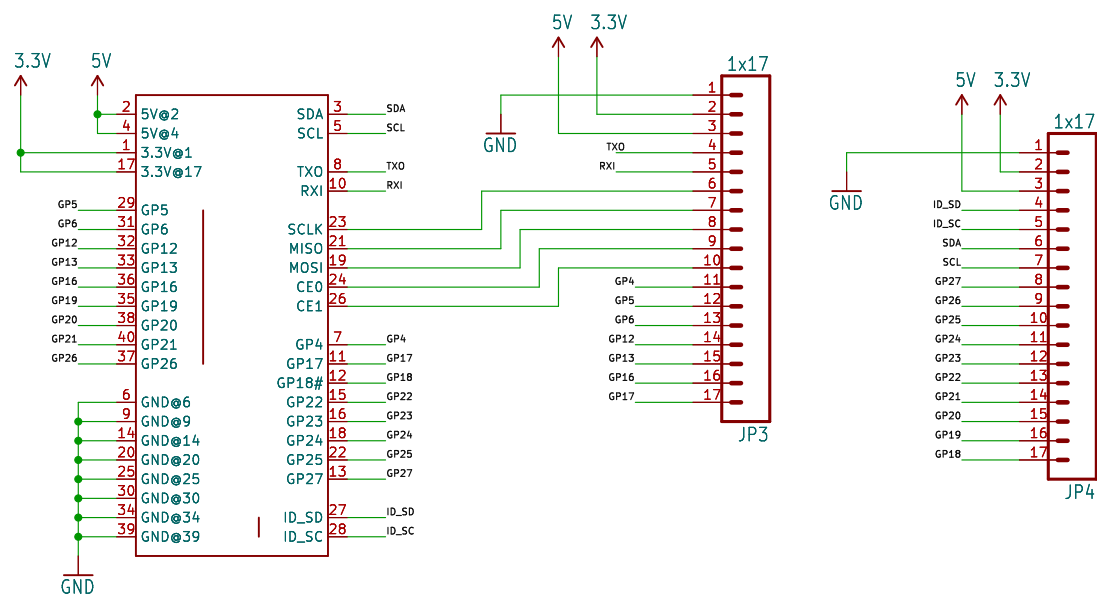

TX0 and RXI use 3.3V logic levels.
Use with 3.3V FTDI adapter.

All logic signals are 3.3V, and not 5V tolerant.
There is no over-voltage protection on the RPi, nor
on the Pi Wedge.

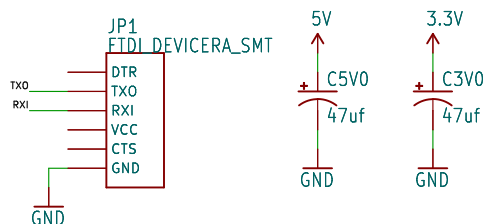

Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/			
TITLE: \${PROJECTNAME}			
Design by: Byron Jacquot			REV: V10
Sheet: /			
Date: \${CURRENT_DATE}		Sheet: \${#}/\$	
Title:			
Size: User		Date:	
KiCad E.D.A. eeschema 7.0.6		Rev:	