

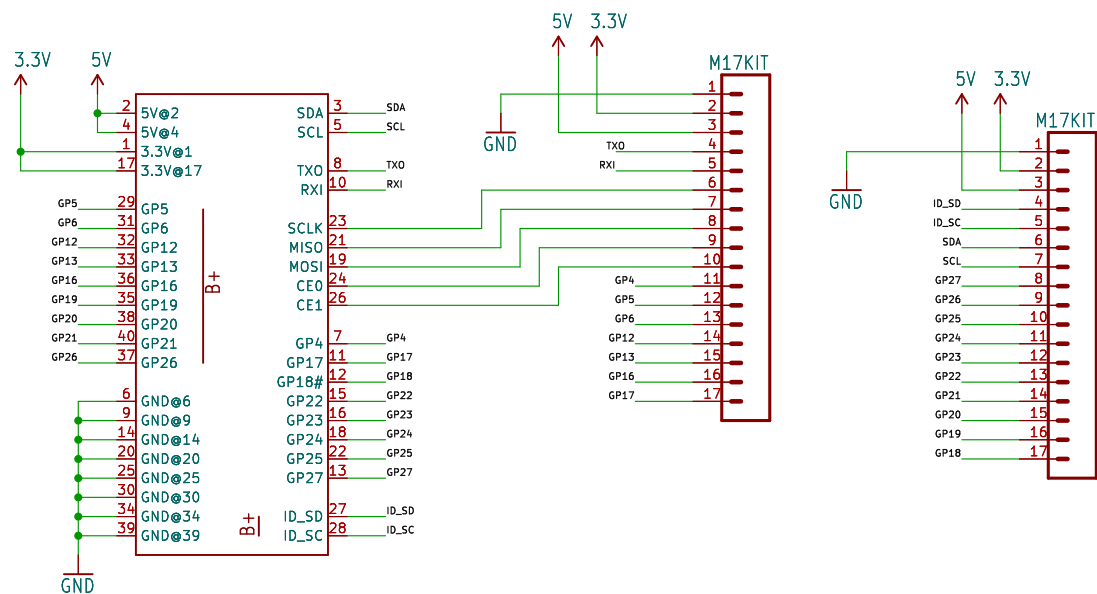




TXD and RXD use 3.3V logic levels.
Use with 3.3V FTDI adapter.



sparkfun

open hardware

All logic signals are 3.3V, and not 5V tolerant.
There is no over-voltage protection on the RPi, nor on the Pi Wedge B+.

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Byron Jacquot

Sheet: /
Date: \${CURRENT_DATE}



REV:
V11

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1

8