

BME280 – Humidity, Pressure, Temperature

MODES:

I2C:


Leave the copper-connected jumpers SJ1–SJ2 as default, use SJ3 to set the I2C address.

SPI 4–WIRE:


Jumpers SJ1–SJ3 can be opened to remove 4.7k load on the SPI lines, but is not necessary.

SPI 3–WIRE:

SJ3 must be opened.

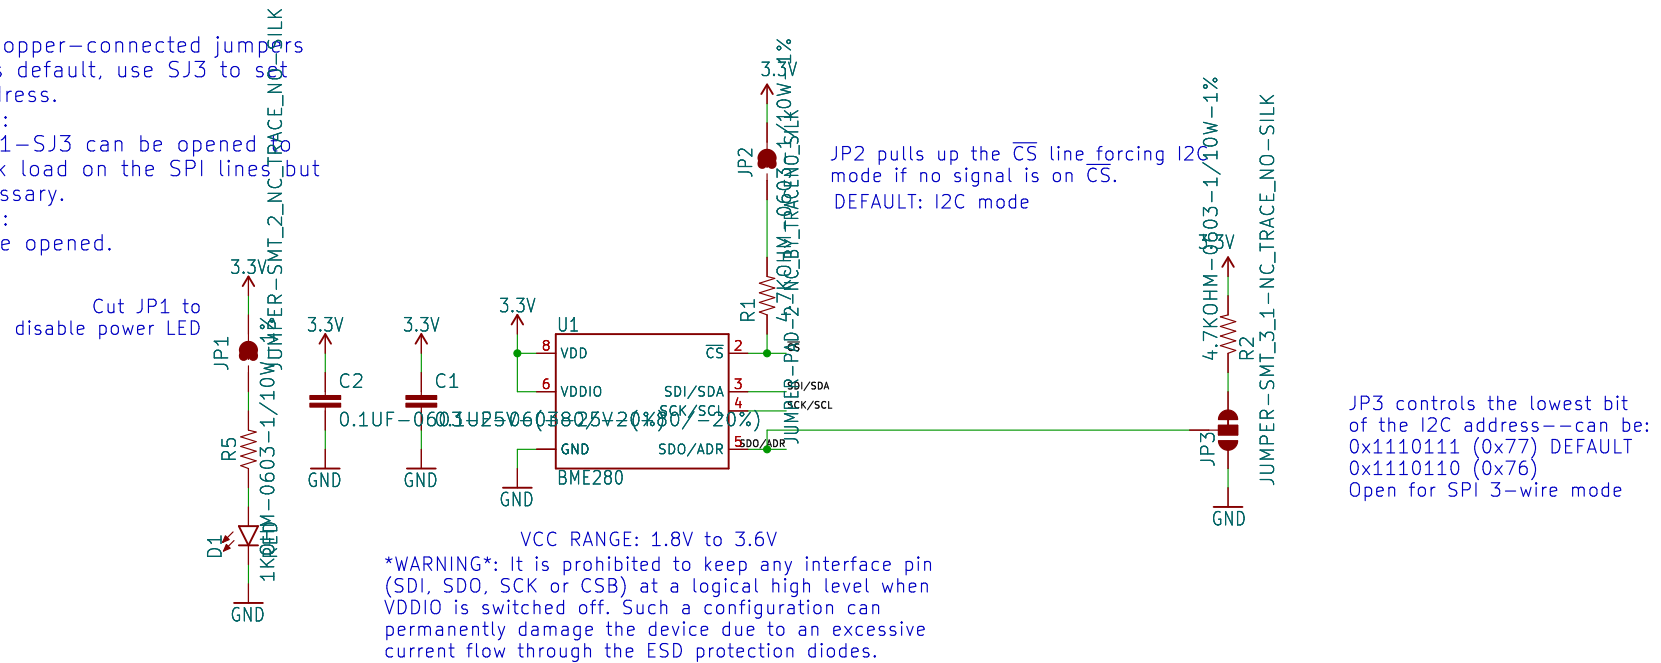

Connectors and I2C Pullups

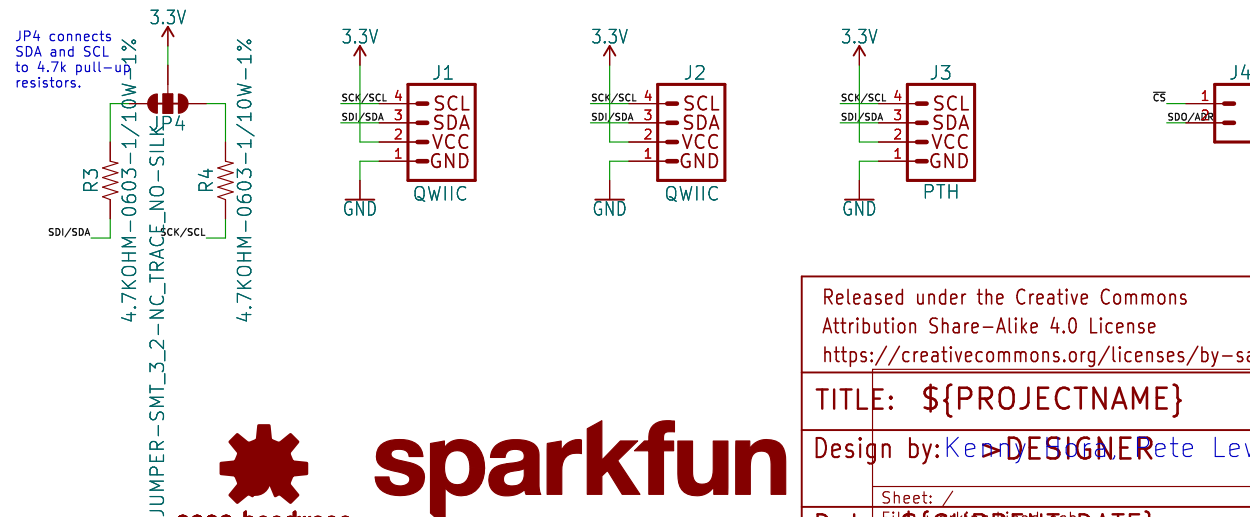

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: Ken & RETE Lewis

REV: >REV

Sheet: /
Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1