



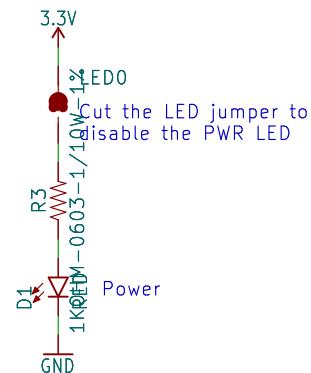

Cut I2C Jumper to remove pull-up resistors from the I2C bus



NOTE: This circuitry defaults to I2C communication (address 0x76). If you wish to communicate over SPI, please cut the CSB jumper AND the ADR jumper. Then use the SDO, SDI, SCK, and CSB holes on the board edge.

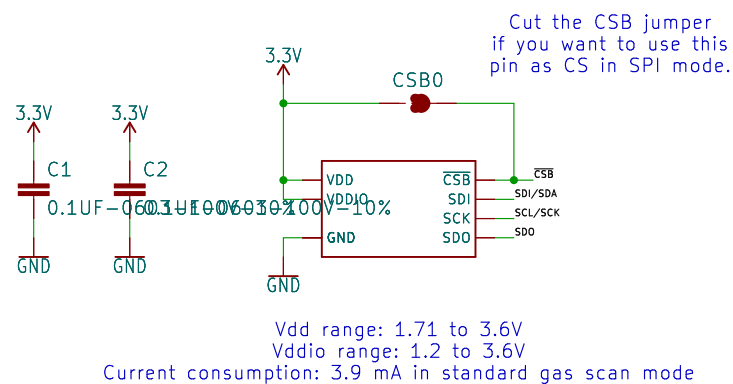

Default, 7-bit unshifted
I2C address: 0x76

Cut this jumper
and connect to Vddio
for I2C address: 0x77

Cut this jumper and
leave SDO unconnected
for SPI operation



CSB	SDA	SCL	ADR	Interface
1	1	1	1 or 0	I2C
float	1	1	float	SPI



sparkfun

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



Design by: Priya Nair \$(DESIGNER)

REV: \$10

	Sheet: /
Date: \${CURRENT_DATE}	File: work\up\BjardLsch
	Title:

Sheet: $\$ \{ \# \} / \$ \{ \#\# \}$

Size: User	Date:
KiCad E.D.A.	eeschema 7.0.6

Rev:
Id: 1/1