



RST needs to come up after VDD to boot into I2C mode.
2.2uF is chosen because we have it in stock.
Should provide about 20ms from power applied to RST > 0.7*VDD

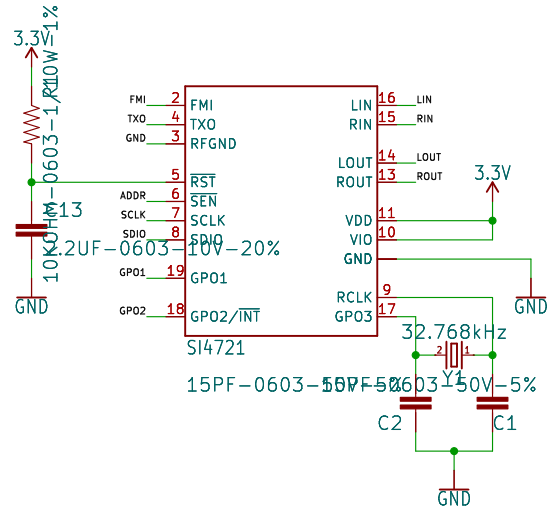


Si4721 FM Transceiver Module

address is determined by -(SEN
LOW) addr = 0010001 (0x11)
HIGH addr = 1100011 (0x63)

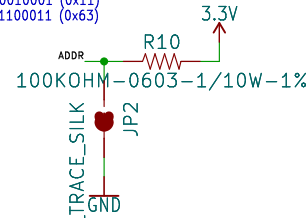


Address Select Jumper

TODO: Note about antenna length/material




RxTx Antenna Connector

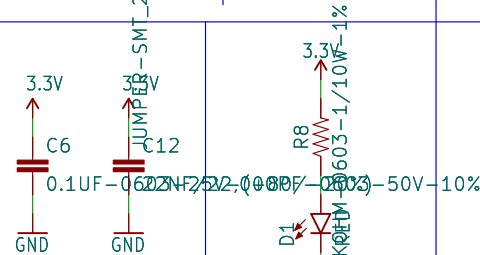


Filter Caps

Power LED

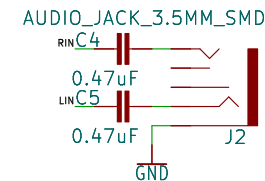


Line Level Audio Input Jack

JUMPER-SMT_3_2-NC_TRACE_SILK

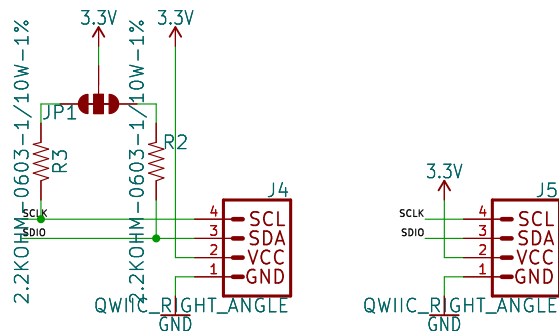

Qwiic Connector

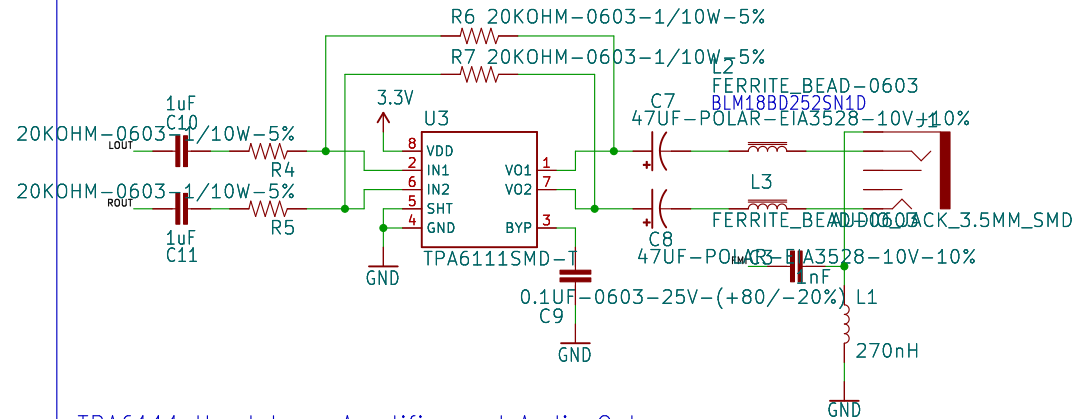

TPA6111 Headphone Amplifier and Audio Out

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

SPARK X

○○○○○○

TITLE: \${PROJECTNAME}

Design by: \${DESIGNER}

REV: \${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Sheet: /

Title:

Size: User

Date:

KiCad E.D.A. eeschema 7.0.6

Rev:

Id: 1/1