



## Connectors


VIN: 11V MAX

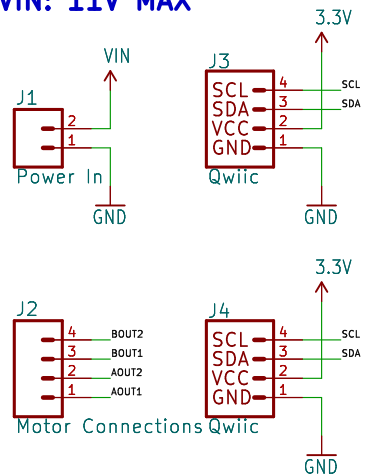

## Status LED




## H-Bridge Driver

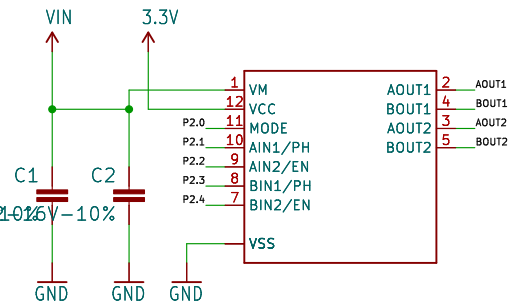


## Config Jumpers

The default (1000) sets the I2C address to 0x5D. A '1' indicates the jumper is bridged.


0000: UART 9600  
0011: I2C addr 0x58  
0100: I2C addr 0x59  
0101: I2C addr 0x5A  
0110: I2C addr 0x5B  
0111: I2C addr 0x5C  
1000: I2C addr 0x5D  
1001: I2C addr 0x5E  
1010: I2C addr 0x5F  
1011: I2C addr 0x60  
1100: I2C addr 0x61  
1101: UART 57600  
1110: UART 115200




## PSoC I/O

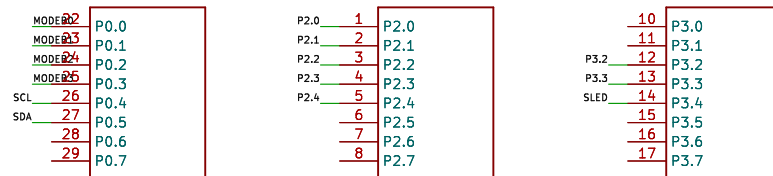


## Test Points



## I2C Jumper



## PSoC Power and Filtering

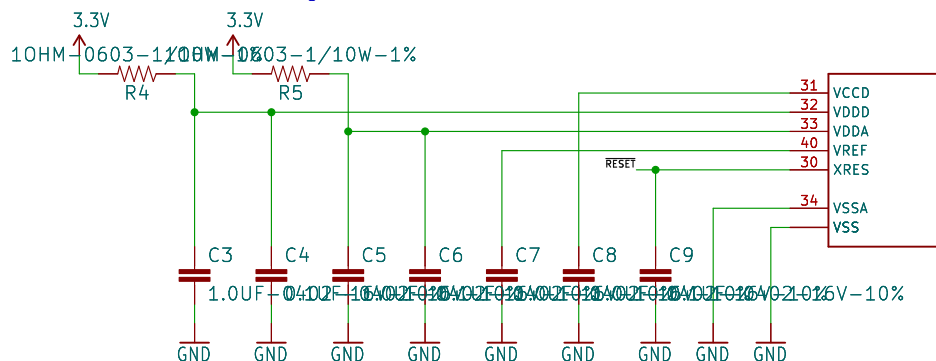

**sparkfun** **QWIIC** **open hardware**

Released under the Creative Commons Attribution Share-Alike 4.0 License  
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Alex Wende

REV: v10

Date: \${CURRENT\_DATE}

Sheet: \${#}/\${##}

Size: User Date: KiCad E.D.A. eeschema 7.0.6

Rev: Id: 1/1