



Main

Provides power and data


VIN: 3.3V – Range depends on sensors

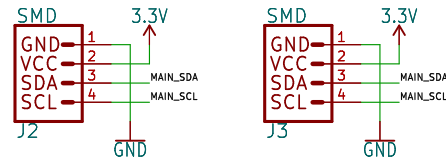

I2C Connectors

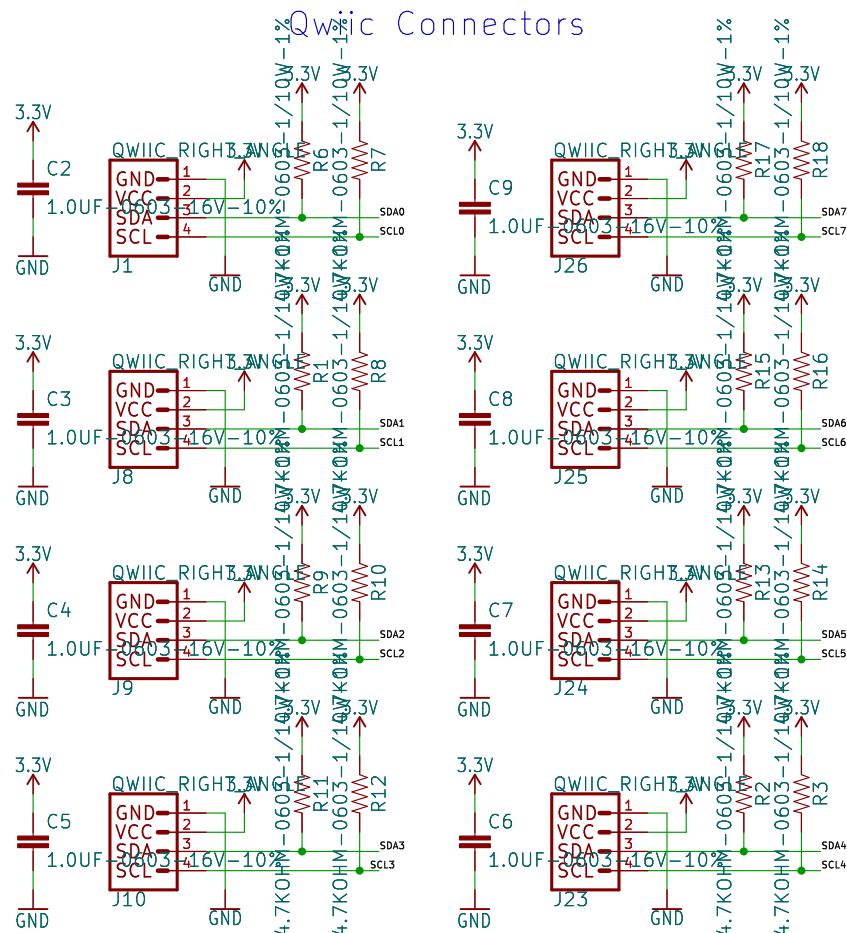

I2C Multiplex

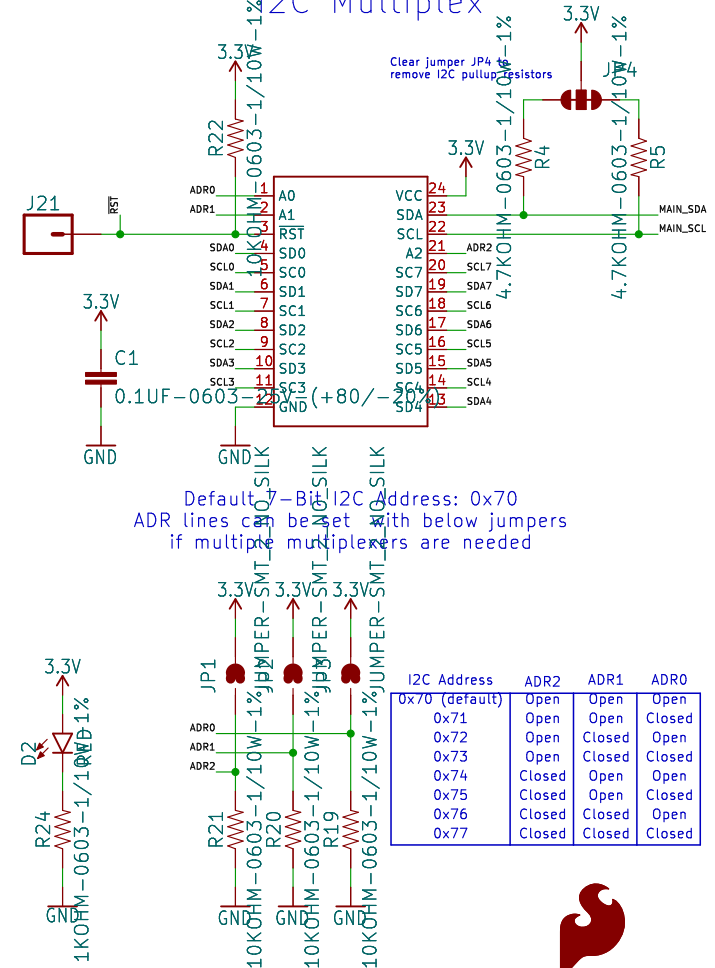

Default 7-Bit I2C Address: 0x70
ADR lines can be set with below jumpers
if multiple multiplexers are needed

I2C Address	ADR2	ADR1	ADR0
0x70 (default)	Open	Open	Open
0x71	Open	Open	Closed
0x72	Open	Closed	Open
0x73	Open	Closed	Closed
0x74	Closed	Open	Open
0x75	Closed	Open	Closed
0x76	Closed	Closed	Open
0x77	Closed	Closed	Closed



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: N. \${DESIGNER}

Revision By: A. England, Wes Furuya

REV: 1

\${REV}

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Title:

Size: User

Date:

KiCad E.D.A. eeschema 7.0.6

Rev:

Id: 1/1