

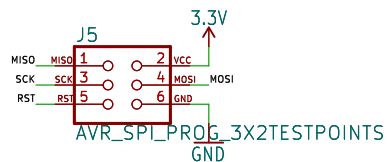




## I2C Pull-up

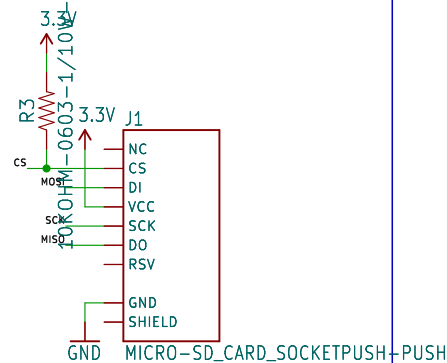

## ISP Header

MicroSD<sup>MP</sup>Socket

## Communication

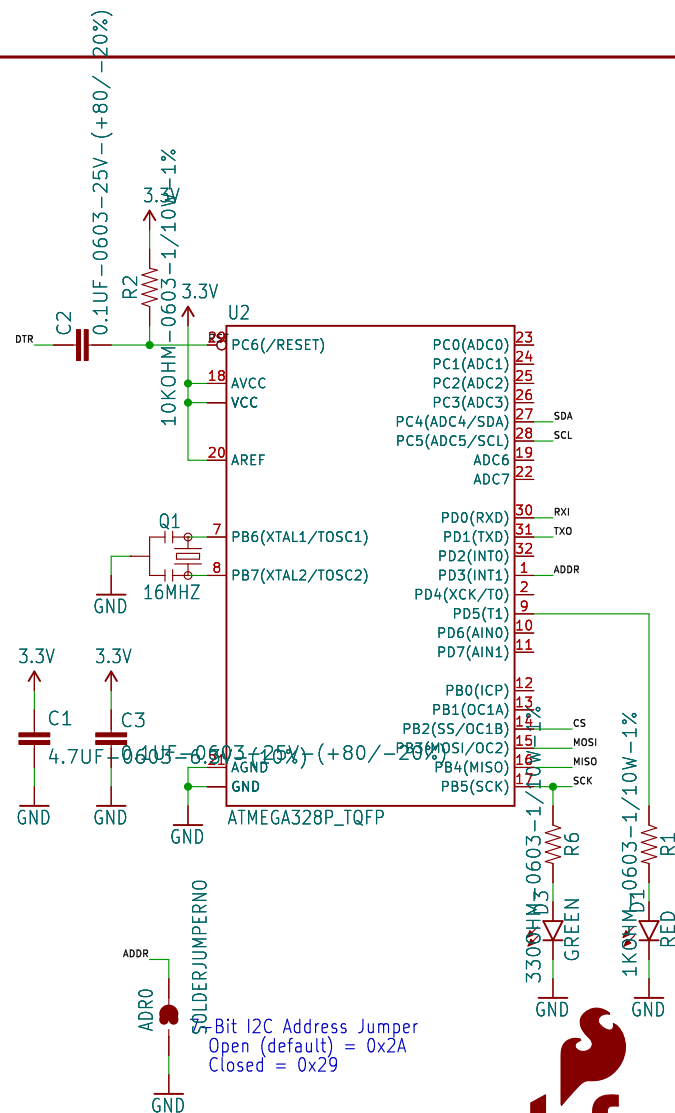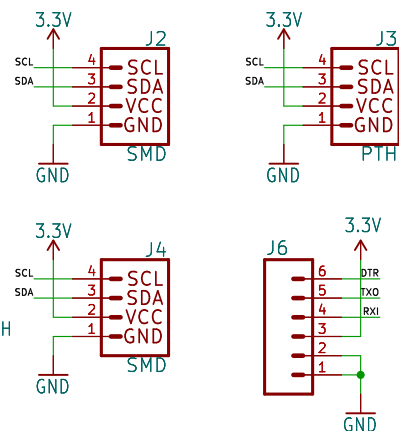

Address Jumper  
fault) = 0x2A  
0x29

GND GND



sparkfun

This board is meant to be used with Qwiic.  
The boot header is meant for Serial Basic connection for programming.



Released under the Creative Commons  
Attribution Share-Alike 4.0 License  
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: N. Seif \$ {DESIGNER}

REV:  
\$12 REV

Sheet: /  
File: working\_kicad.sch  
Date: \$(CURRENT\_  
Title:

Sheet:  $\$ \{ \# \} / \$ \{ \#\# \}$

|              |                |
|--------------|----------------|
| Size: User   | Date:          |
| KiCad E.D.A. | eeschema 7.0.6 |

Rev:  
Id: 1/1