



The board is designed for a 15°C temperature rise. Allowing for a continuous current draw of 5.5A. The relay can handle 10 A at 110VAC for short pulses (under 20 seconds).

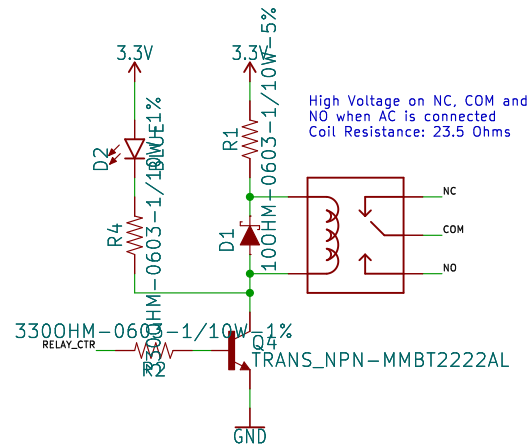


Screw Terminal
J5

NO 3
COM 2
NC 1

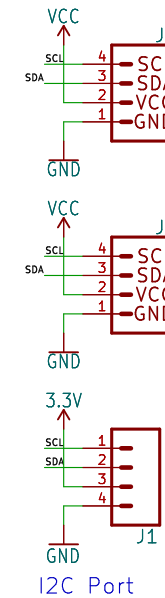

ATTiny85
VCC: 1.8V-5.5V

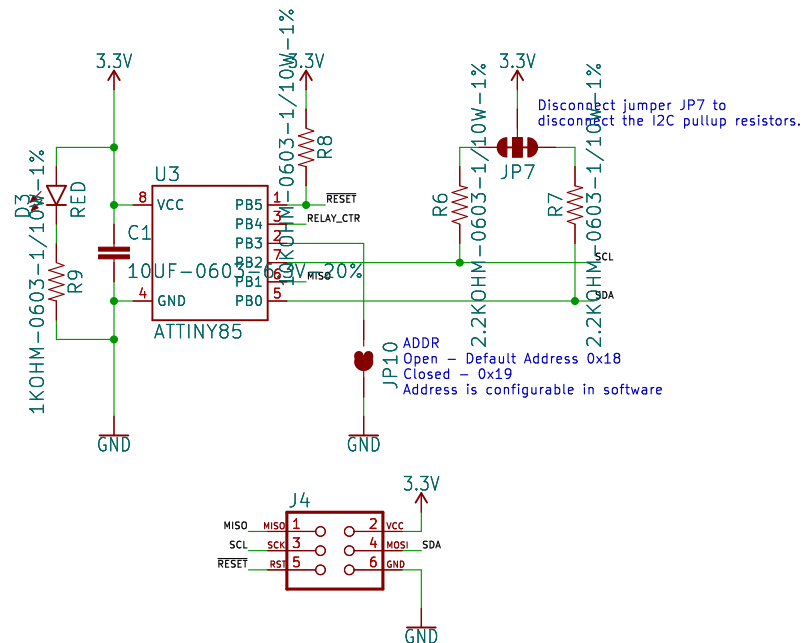

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

REV:
v10

Sheet: \${#}/\${##}

Rev:
Id: 1/1