



SuperCapacitor Power Backup

Cut trace on jumper JP1 to disconnect SuperCapacitor. Add solder to other side of jumper to connect optional battery

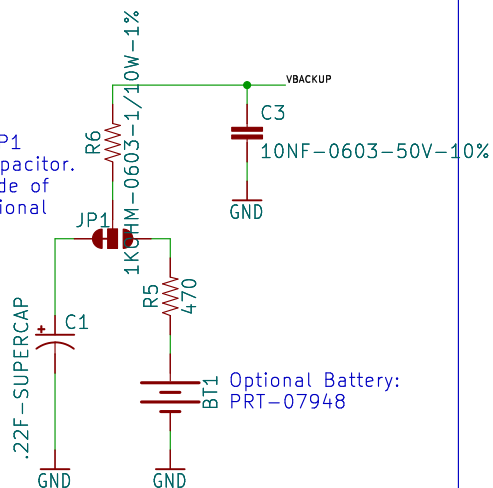


RTC Module

Operating voltage: 1.5–3.6 V
I2C Address: 0xD2

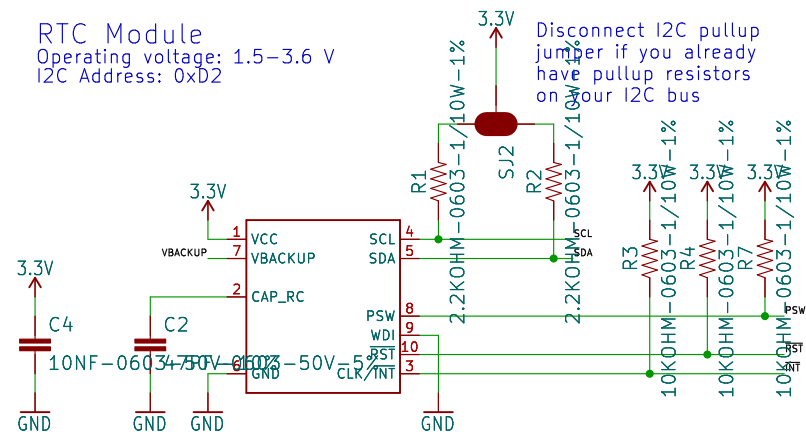

Disconnect I2C pullup jumper if you already have pullup resistors on your I2C bus

Qwiic Connectors/ I2C Interface

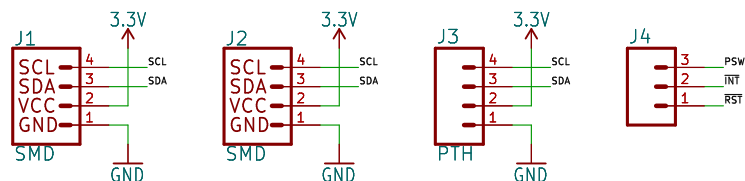

sparkfun



Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>



TITLE: \${PROJECTNAME}

Design by: A. England

REV:
v10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date:
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1