

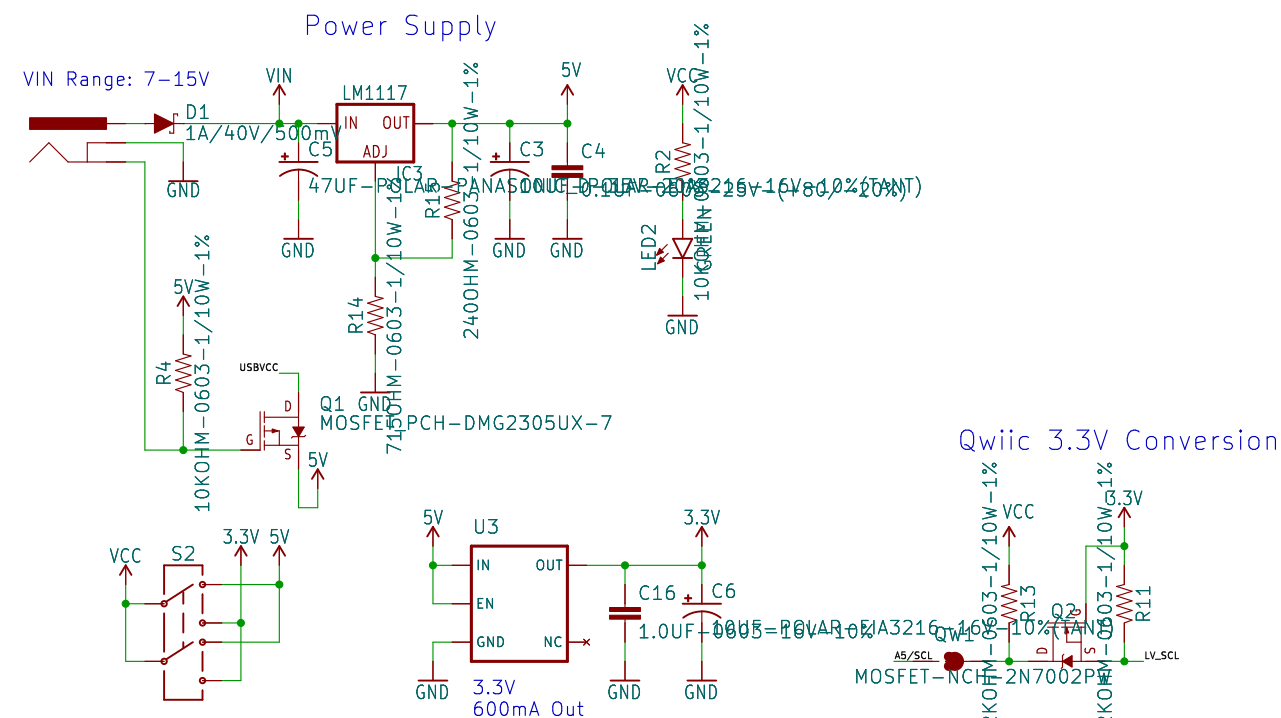


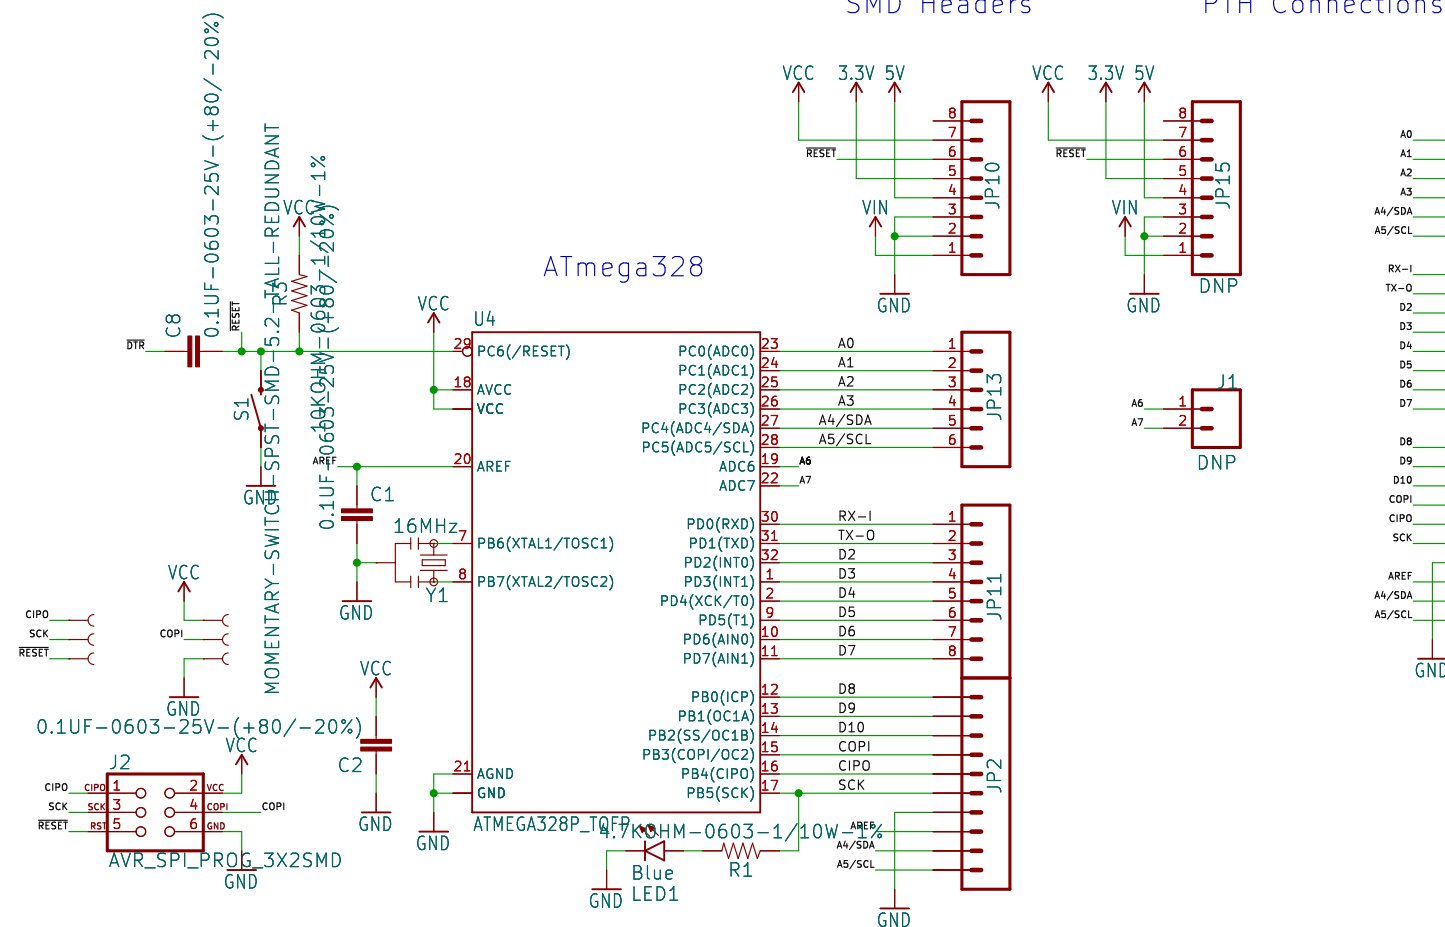

Board I/O Voltage

Slide the switch to change the I/O Voltage.
Applying tape over switch is recommended
to prevent accidental change.
This switch is limited to 1.2A.

USB-to-Serial Converter

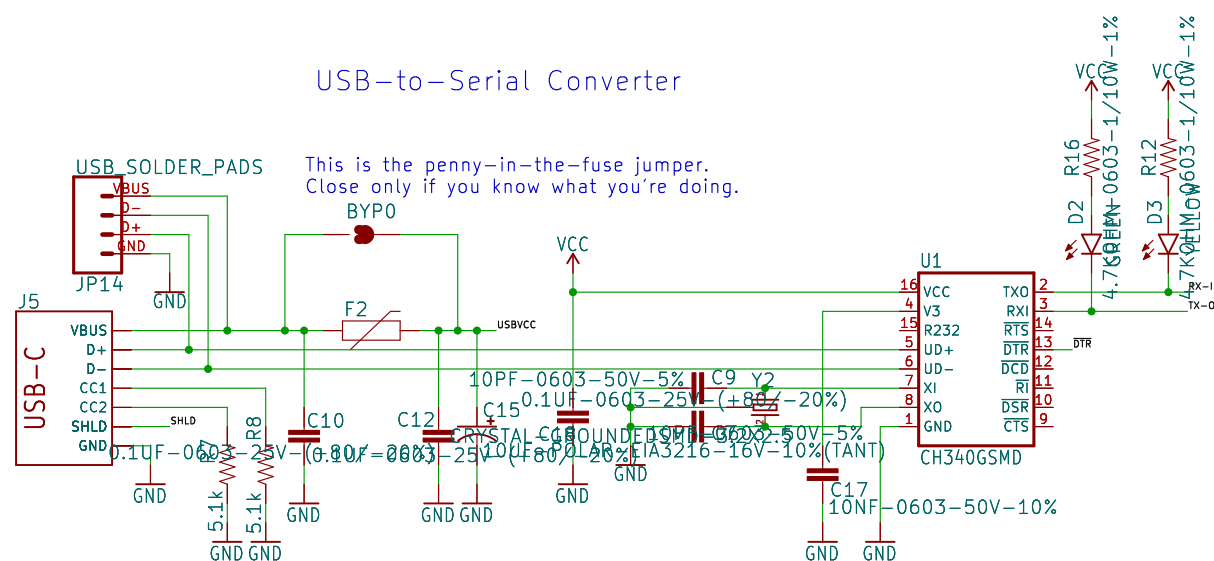

Trace width calculation:
2A, 1oz. copper
10C rise in temperature
30.8 mil width
<https://www.eeweb.com/tools/external-pcb-trace-max-current>



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/			RedBoard Logo	
TITLE: \${PROJECTNAME}			RedBoard Logo	
Design by: \${DESIGNER} N. Seidle Based on Arduino by: M.Banzi, D.Cuartielles, T.Ige, G.Martino, D.Mettis Revised By: Priyanka Makin			REV: \${REV}	
Date: \${CURRENT_DATE}			Sheet: \${#}/\${##}	
Size: User KiCad E.D.A. eeschema 7.0.6			Rev: Id: 1/1	