




Voltage Regulator and Battery Charger

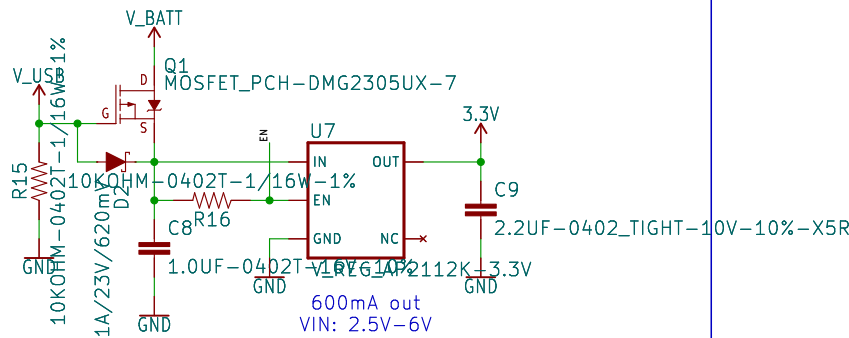


Lithium-Polymer Battery Charger (1-cell)

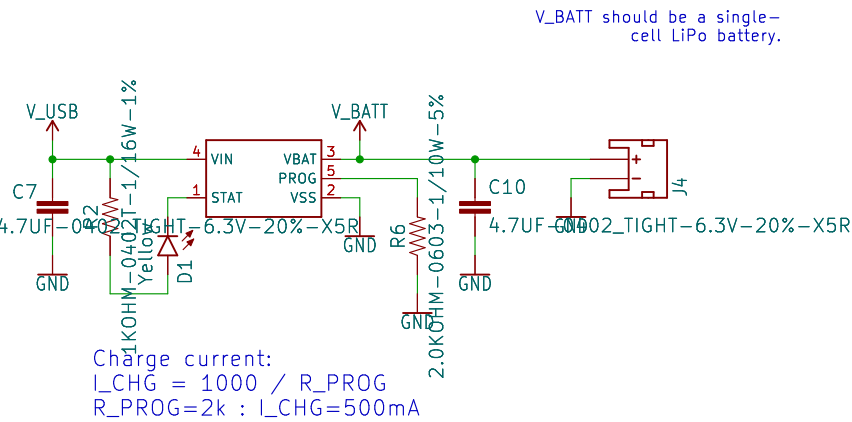


Debug Header



USB Connector




Raspberry Pi RP2040

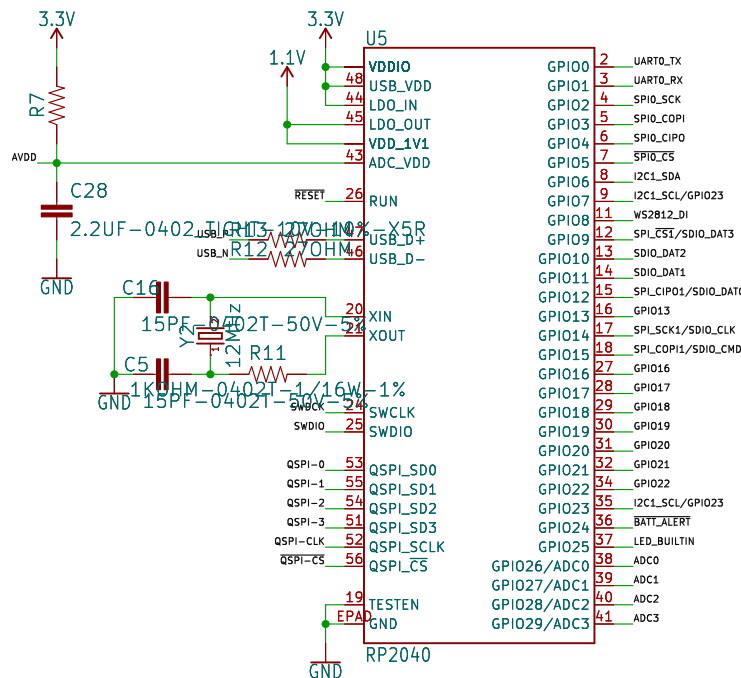


PIO must be contiguous for SDIO DAT pins but can fall back to SPI1


WS2812




Qwiic Connector

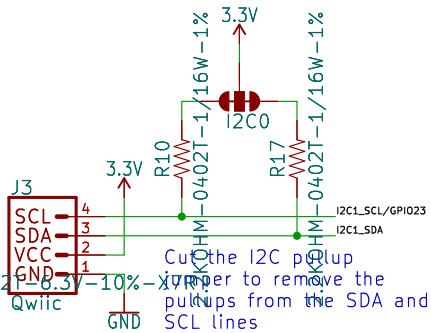

16MB / 128mbit Flash

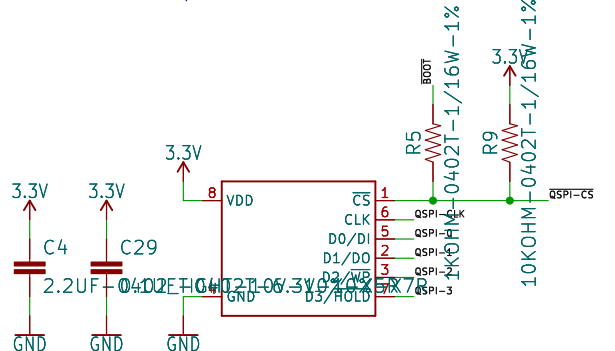


Battery Fuel Gauge


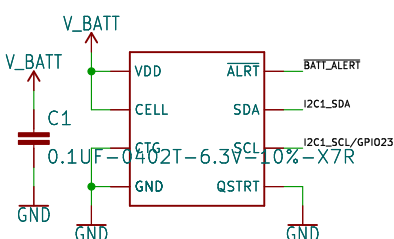


I2C_ADDR: 0x36


uSD Connector

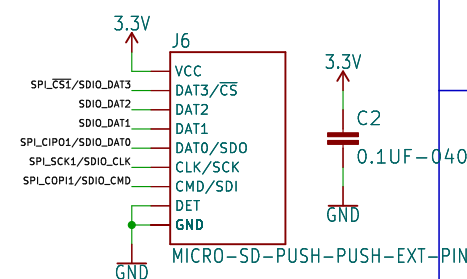


Headers

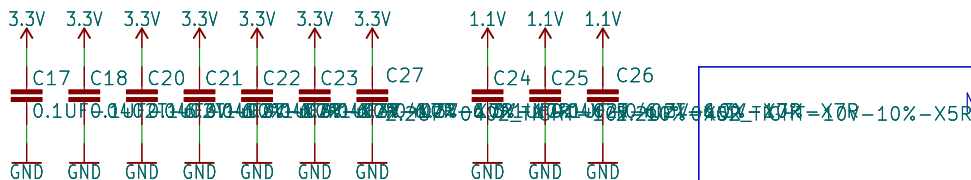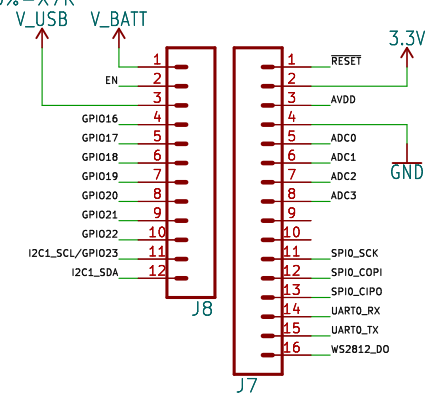


MikroBUS socket

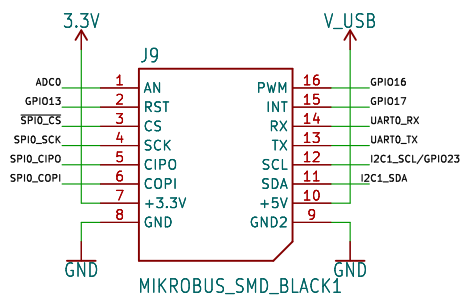

Status LED



Power LED

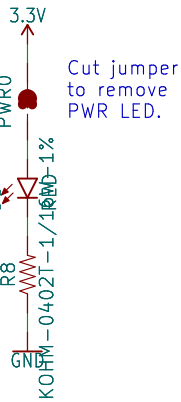

Boot Select



Reset Button



sparkfun



Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: \${DESIGNER}
Revised by: Priyanka Makin

Date: \${CURRENT_DATE}

Size: User
KiCad E.D.A. eeschema 7.0.6

REV: \${REV}

Sheet: \${#}/\${##}

Rev: Id: 1/1