



USB / Voltage Regulator

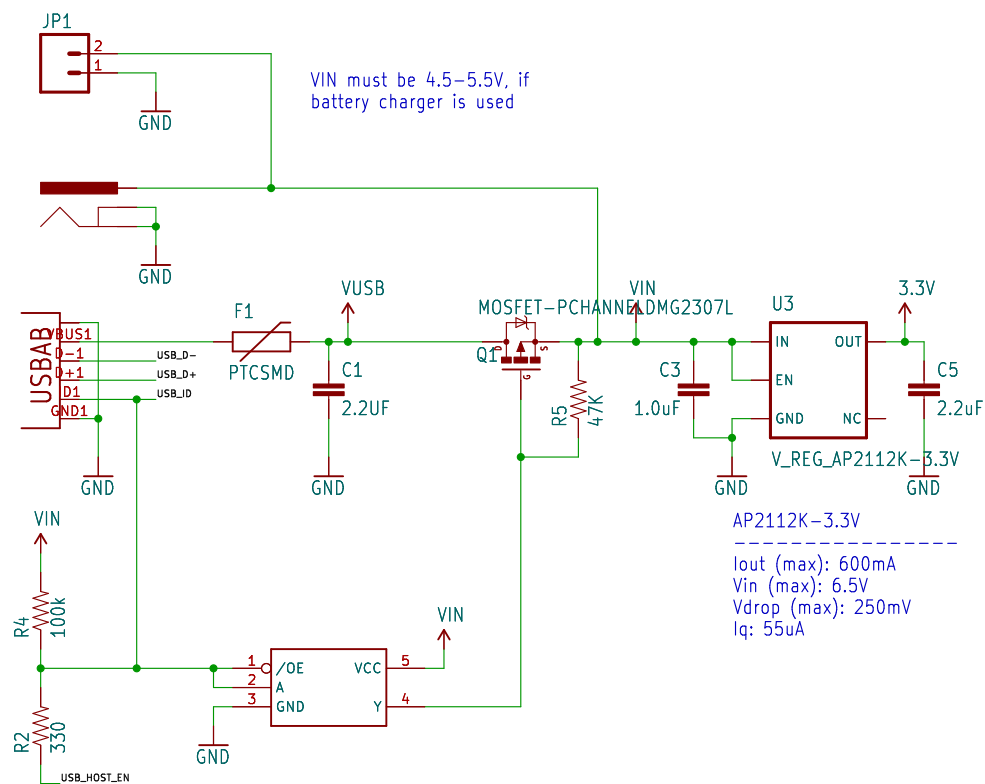


USB Host/Device Control

- USB_ID High: Y high, Q1 off
- USB_ID Low: Y low, Q1 on
- Set USB_HOST_EN low to turn Q1 on and route power OUT the board.
- USB_HOST_EN floating or HIGH turns Q1 off. USB supply flows through Q1 body diode.


LEDs~

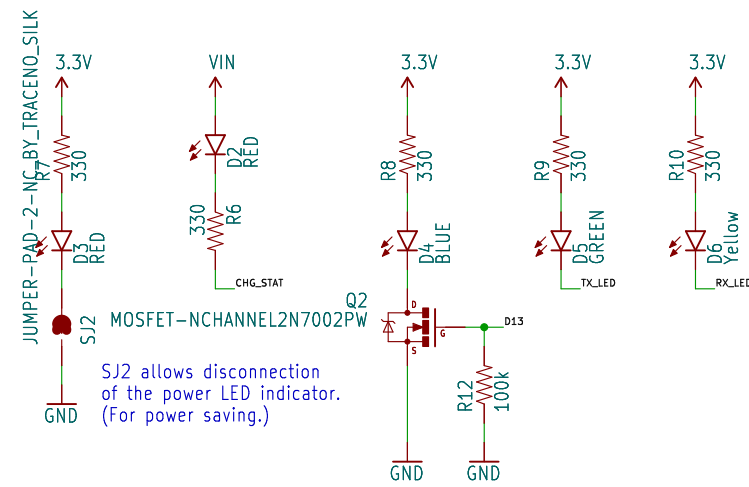


Cortex Debug/Program Connector

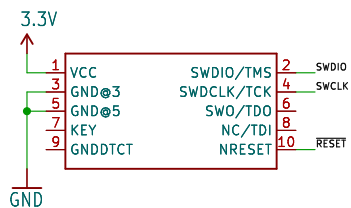


Arduino R3 Headers

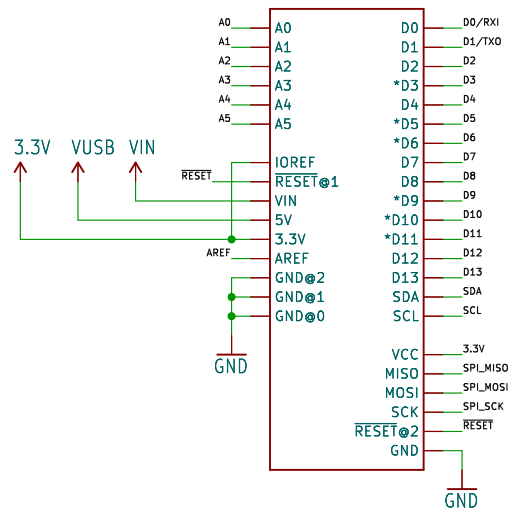

Miscellany Pin Breakouts

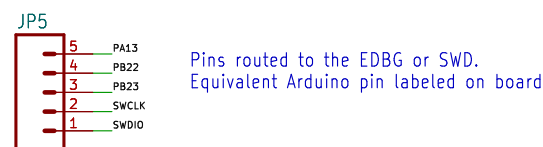


ATSAMD21G

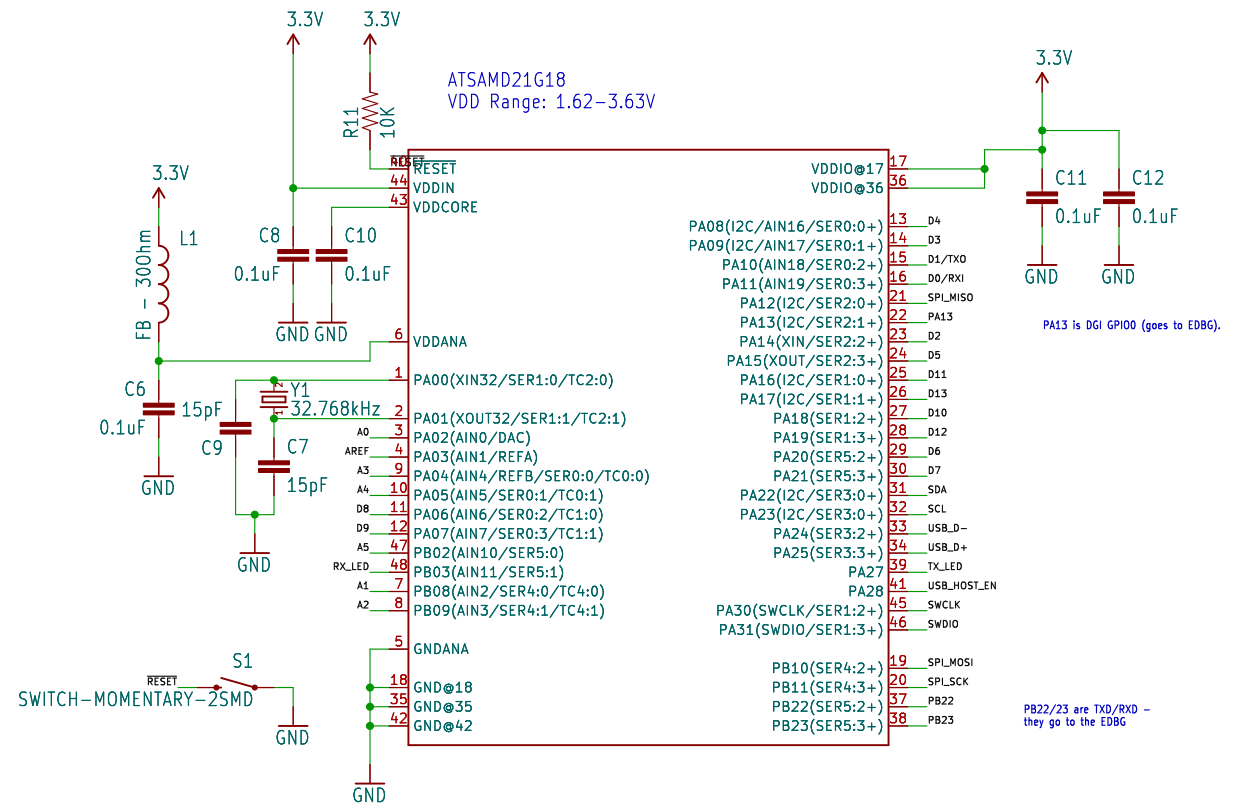

This Cell Left Blank

Battery Input & Charge

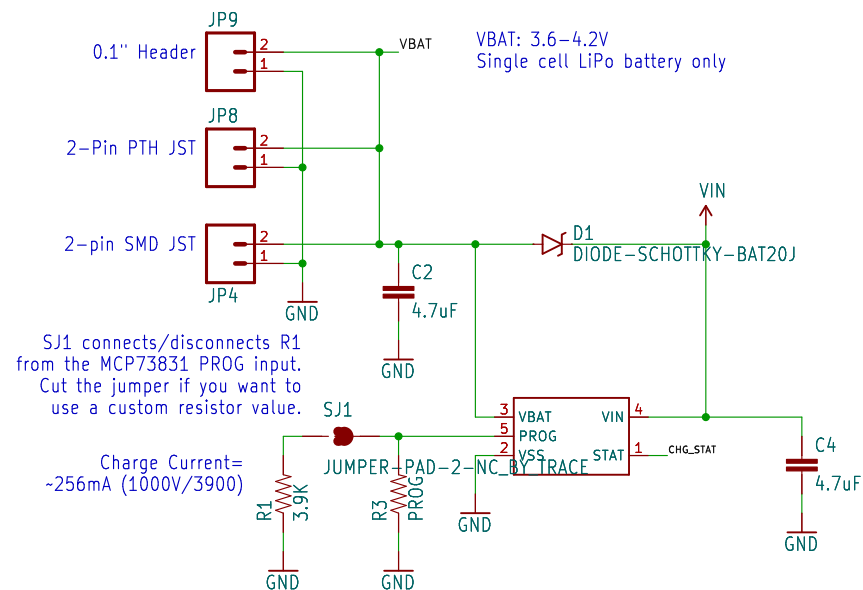

Released under the Creative Commons Attribution Share–Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/

TITLE: \${PROJECTNAME}

Design by:
Jim Lindblom

Date: \${CURRENT_DATE}

Size: User
KiCad E.D.A. eeschema 7.0.6

Based on:
Arduino Zero by Arduino.cc
Arduino M0 by Arduino.org

REV:
v10

Sheet: \${#}/\${##}

Rev:
Id: 1/1