








Serial Controlled Motor Driver


A driver for controlling 2 (or more) DC motors.



Power Port (3.0 to 11.0V)




Programming Header

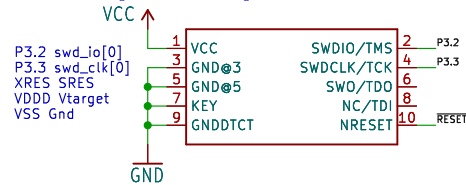


Config Jumpers

The default (all open) is the UART mode. A '1' indicates the jumper is bridged.


0000: UART
0001: SPI
0010: Slave device (User port unused)
0011: I2C addr 0x58
0100: I2C addr 0x59
0101: I2C addr 0x5A
0110: I2C addr 0x5B
(...)
1100: I2C addr 0x61
1101: I2C addr 0x62
1110: I2C addr 0x63
1111: Reserved

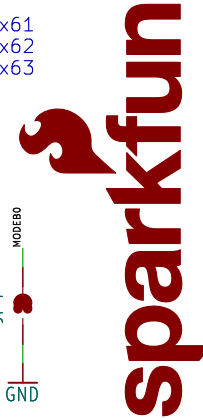

Serial Ports

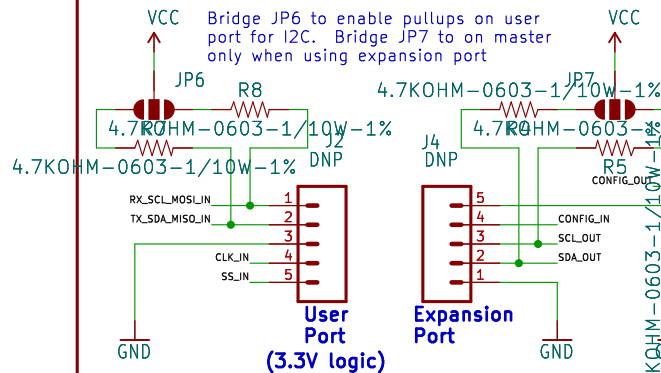


H-Bridge Driver

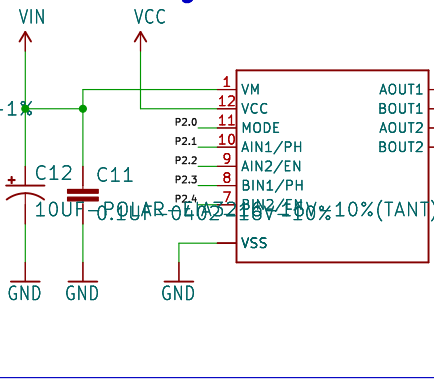


3.3V Regulator

Open JP5 to disconnect 3.3V regulated supply. In this configuration, a regulated voltage must be attached to the VCC pin, and must be in the range of 2.0 to 5.5V.

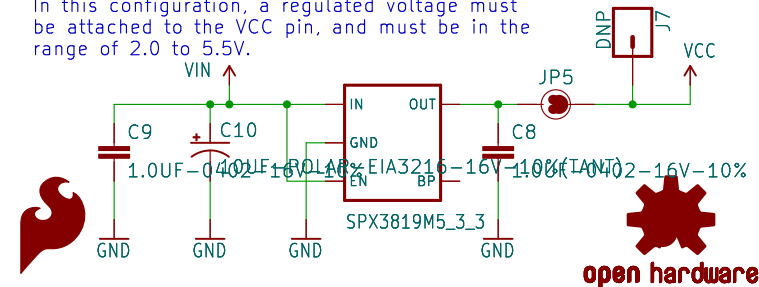

PSoC Power and Filtering

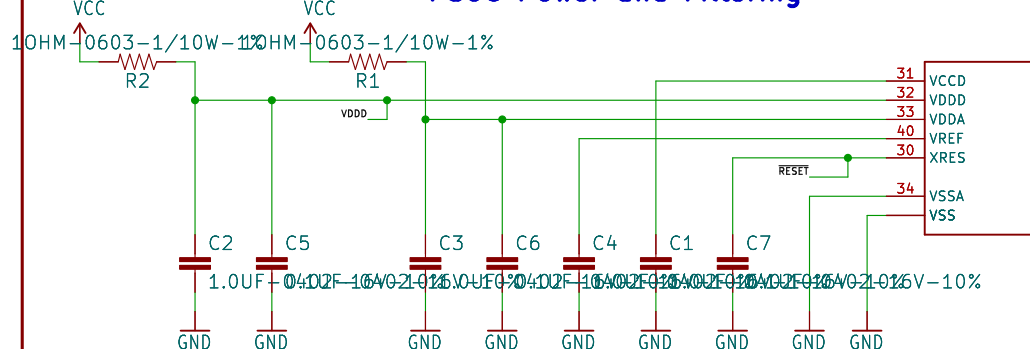

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Marshall Taylor

REV: 2.0

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User
KiCad E.D.A. eeschema 7.0.6

Rev: Id: 1/1