



Sht_15 Sensor

Vcc Range = 2.4V – 5.5V




The SHT_15 communicates using a 2-wire Serial Protocol, NOT I2C. However, it can live on an I2C bus with other I2C devices without interfering.

Pull-up Resistor

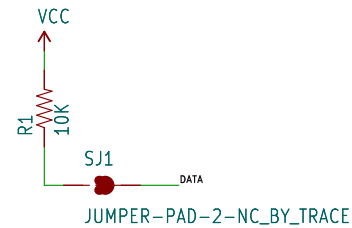

Cut trace on jumper to disable pullup resistor on Data line.

Connector




sparkfun



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Nathan Seidle

Revised By: Joel Bartlett

REV:

V14

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

File: Sparkfun-OpenHw-
Title:

Size: User

Date:

KiCad E.D.A. eeschema 7.0.6

Rev:

Id: 1/1